



RESCUE
TECH

NEW AND IMPROVED PRODUCTS*



- Sewn Prusik Cord5
- Hardware Marking Pens8
- Multi-Unit Edge Roller**9



- Mini Haul Kit34
- Rope Access Set37
- 12' Raft Kit37
- Rescue Team Set38
- Z-Rig Haul Set39



- Rope Management Rollers10
- Escape / Search Pouch12
- Search Rope w/ Snap**15



- Double Foot Sling49
- Escape 8**50
- Rescue Rappel Rack52
- Skyhook Web Anchor59
- Lanyard "I"64
- Lanyard "V"64




- Searchline Master Kit17
- Window Rappel Anchor18
- RIT Rescue Slings19
- Navaho Harness24
- Operator Harness**25



- Mule Litter Wheel70
- Clik-Lock 2 Pc Patient Strap73
- Reeves Sleeve Drag74
- Bariatric Training Manikin**78
- Harness Equipment Pouch84



- RD70 Carabiner29
- Big Dan Carabiner**29



- Swiftwater Rescue Drysuit85
- Force 6 PFD89
- SearchCAM106
- Under Door Camera107
- GX2003 4-Gas Monitor108
- Trench Rescue Book**121

*Partial Listing

Items shown are in BOLD characters

Dear Friends & Rescuers:

Another year has passed with major accomplishments here at RescueTECH. We have just completed a 900 sq ft. expansion of floor space to our warehouse. This allows us to more efficiently store the ever-increasing number of products that we manufacture and distribute.

In December 2007 we successfully completed our annual audit to ISO9001-2000. Now certified by SGS, RescueTECH continues to provide the highest quality service and products to Technical Rescuers.



Look at our new items, highlighted in the listing above, for more innovative products from RescueTECH. We continue to be proud of our alliances with many top international equipment manufacturers such as Ruth Lee, Con-Space, and International Safety Components. Through these partnerships, rescuers can expect the highest quality from their rescue products.

We look forward to serving you in this year and for years to come!

Glenn Newell, President / Owner
and Staff of Rescue Technology



RescueTECH ACCESS™ Lifeline**A New Era Begins...**

RescueTECH spent 35 years helping design some of the best known rescue ropes in the world. Now, we have used our knowledge to create a rope design that gives the best combination of all desired characteristics. By building the ropes from the "ground up", we are able to provide a super-strong rope with low stretch and excellent flexibility and knotability. Our ropes actually handle better after 6 months of use than some new ropes from other manufacturers. We specifically address the issue of sheath slippage when constructing all of our top quality Rescue Ropes. Solution dyed color insures that colors won't run. All ropes of the same diameter will perform identically, making multi-rope systems much easier to control. Certified to NFPA 1983 and EN1891. Available in 11 color combinations.

**RescueTECH****NFPA Life Safety Ropes**

access
LIFELINE™

**ACCESS LIFELINE™ - STRIPES**

Stock Number	Diameter in. mm	Color/Stripe	NFPA Tensile Strength* lbf. KN	WLL** (lbs.)	NFPA Rating	Wgt / 100 ft (lbs.)	Price per ft.
5157xxxOR	7/16 11	Orange w/ Yellow	7,800	35	520	Light	5.4
5157xxxBL		Blue w/ Yellow					0.95
5157xxxRD		Red w/ Yellow					0.95
5157xxxYE		Yellow w/ Blue					0.95
5147xxxWR		White w/ Red					0.82
5147xxxWB		White w/ Blue					0.82
5158xxxOR	1/2 13	Orange w/ Yellow	10,000	46	667	General	7.0
5158xxxBL		Blue w/ Yellow					1.12
5158xxxLG		Lime Green w/ Blue					1.12
5158xxxRD		Red w/ Yellow					1.12
5158xxxYE		Yellow w/ Blue					1.12
5148xxxWR		White w/ Red					0.91
5148xxxWB		White w/ Blue					0.91
5159xxxOR	5/8 14.5	Orange w/ Yellow	11,465	51	764	General	
5159xxxBL		Blue w/ Yellow					1.40
5159xxxRD		Red w/ Yellow					1.40
5159xxxYE		Yellow w/ Blue					1.40

*Calculated as 3 standard deviations from the average tensile strength.

**WLL - Recommended Working Load (also known as Safe Working Load) is calculated using the NFPA 15:1 Safe Working Load Ratio. See page 9 for further information on WLL.

7/16" Color w/ Stripe

7/16" x 150'	142.50
7/16" x 200'	190.00
7/16" x 300'	285.00
7/16" x 600'	570.00

7/16" White w/ Stripe

7/16" x 150'	123.00
7/16" x 200'	164.00
7/16" x 300'	246.00
7/16" x 600'	492.00

1/2" Color w/ Stripe

1/2" x 150'	168.00
1/2" x 200'	224.00
1/2" x 300'	336.00
1/2" x 600'	672.00

1/2" White w/ Stripe

1/2" x 150'	136.50
1/2" x 200'	182.00
1/2" x 300'	273.00
1/2" x 600'	546.00

5/8" Color w/ Stripe

5/8" x 300'	420.00
5/8" x 600'	840.00


To create the part number substitute the length for the 'xxx'.

TECHNote™**Stripes vs. Solids**

Different colors are very useful in distinguishing particular ropes during a rescue or training operation. The addition of stripes to ropes offers the rescuer the ability to see the movement of the rope. When two striped ropes are used side-by-side, the stripes act as index marks. If the stripes on the two ropes are not moving in relationship to each other, then the ropes are travelling at the same speed.

RescueTECH

NFPA Life Safety Ropes

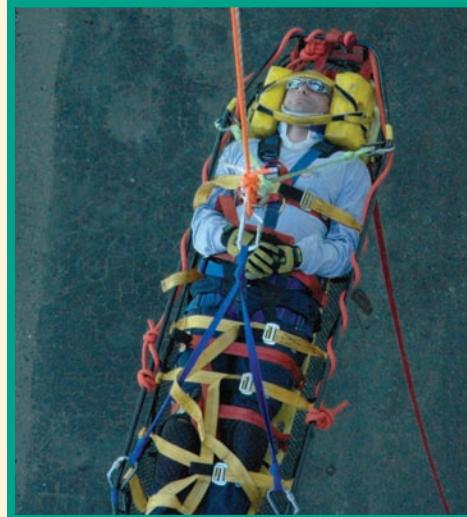

ACCESS LIFELINE™ - SOLID COLORS

Stock Number	Diameter in. mm	Color	NFPA Tensile Strength* lbf. KN	WLL** (lbs.)	NFPA Rating	Wgt / 100 ft (lbs.)	Price per ft.
5156xxxORS	3/8 9.5	Orange	6,000	27	400	Light	4.7 0.84
5156xxxBLS		Blue					0.84
5156xxxRDS		Red					0.84
5156xxxBKS		Black					0.84
5157xxxORS	7/16 11	Orange	7,800	35	520	Light	5.4 0.95
5157xxxBLS		Blue					0.95
5157xxxRDS		Red					0.95
5157xxxYES		Yellow - NEW					0.95
5157xxxBKS		Black					0.95
5157xxxODS		Olive Green - NEW					0.95
5158xxxORS	1/2 13	Orange	10,000	46	667	General	7.0 1.12
5158xxxBLS		Blue					1.12
5158xxxRDS		Red					1.12
5158xxxYES		Yellow - NEW					1.12
5158xxxBKS		Black					1.12
5158xxxODS		Olive Green - NEW					1.12

3/8" Color

3/8" x 300' 252.00
3/8" x 600' 504.00

To create the part number
substitute the length for the 'xxx'.

7/16" Color

7/16" x 150' 142.50
7/16" x 200' 190.00
7/16" x 300' 285.00
7/16" x 600' 570.00

1/2" Color

1/2" x 150' 168.00
1/2" x 200' 224.00
1/2" x 300' 336.00
1/2" x 600' 672.00

*Calculated as 3 standard deviations from the average tensile strength.

**WLL - Recommended Working Load (also known as Safe Working Load) is calculated using the NFPA 15:1 Safe Working Load Ratio.

What to look for in Life Safety Ropes

QUALITY - RescueTECH operates under a quality control program that meets stringent ISO 9000 guidelines. We are certified to ISO-9001:2000 by SGS U.S. Testing Company, Inc., a leading independent international certifying organization. Also, most of the suppliers we work with, are certified to the ISO 9000 Standard. The ISO Standard ensures that our Quality Control and Quality Assurance programs meet stringent international guidelines.



CONSISTENCY - All ropes, in comparable sizes, have identical handling and performance characteristics. This is ideal for rescues requiring multiple ropes of different colors. RescueTECH ropes are designed to provide consistent performance throughout the life of the Lifeline.

CERTIFICATION - ALL RescueTECH General Use Lifelines, Personal Use Lifelines, and Escape Ropes meet or exceed current NFPA 1983 standards for construction, marking, and third party independent certification.

ECONOMY - The RescueTECH Rope's optimum blend of strength, flexibility, abrasion resistance, and load absorption creates the best rope for today's rescuers.

CONSTRUCTION - 100% permanent solution dyed color in the polyester sheath with contrasting marker stripe. Superior flexibility, knotability and excellent resistance to abrasion that is up to four times greater than other kernmantle ropes.

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.

RESCUE TECHNOLOGY - www.rescuetech1.com





RescueTECH Prusik Cords

Prusik cords with the same high quality and long wear design as our Rescue Ropes. Size selection should be based upon diameter of main line. Flexible cord that is both strong and highly resistant to abrasion, only one style of small diameter cord is produced. Available by the foot or in Spool Lengths: 6mm x 330 ft.; 7mm / 8mm/ 9mm x 200 ft.

	<u>Diameter</u>	<u>Strength</u>	<u>Colors</u>	<u>Main Line</u>	<u>per ft.</u>	<u>Spool</u>
5096000	6mm	1650 lbf.	Black, Blue Mix, Red Mix	7/16 - 1/2"	0.35	105.00
5097000	7mm	2300 lbf.	Black, Teal Mix, Gold Mix	1/2 - 5/8"	0.43	86.00
5098000	8mm	2900 lbf.	Black, Red Mix, Yellow Mix	1/2 - 5/8"	0.52	104.00
5099000	9mm	3670 lbf.	Blue Mix, Yellow Mix	5/8"	0.63	126.00

TECHNote™

Prusik Cord vs. Accessory Cord

What is the difference between prusik Cord and accessory cord? Generally there is no difference. The key is being able to provide a cord that has specifications and characteristics that meets the needs of the rescuer.





5/8" Hoisting Line

100% Multifilament polypropylene for a myriad of utility use. Ideal for hoisting equipment. Soft, supple, easy to grip. Strength: 4,000 lbf. WLL: 400 lbs. Diameter: 5/8". Color: Black.

230319001	Hoisting Line x ft.	0.46
230319101	Hoisting Line x 100'	46.00
230319501	Hoisting Line x 500'	228.00

NOT FOR LIFE SAFETY USE.



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.




RescueTECH Sewn Prusik

Our Product Development Department has worked hard to provide a durable Pre-Sewn 8mm prusik for use in rescue systems. Our heavy duty stitching uses thread that is 150% thicker/stronger than other brands. Since not all PMP's are equally sized, we have created 2 sizes of Short Prusiks to work with the Long Prusik. Testing shows that a single RescueTECH Sewn Prusik pulled on RescueTECH's ACCESS 1/2" Lifeline starts "clutching/slipping" at a strength of 3,000 lbf*. When pulled end-to-end the single loop strength exceeds 4,500 lbs. Marked with durable labeling to help product identification.

751180162	16" for 2" PMP (Yellow)	7.00
751180182	18" for 2.5" - 3" PMP (Yellow)	7.00
751180224	22" Prusik (Red)	7.50

* Results may vary depending upon brand and condition/age of the main rope.

TECHNote™

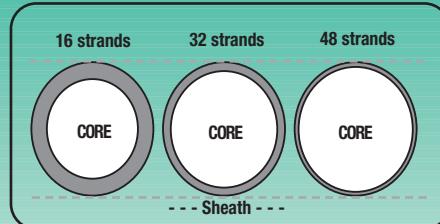

Sheath Thickness Diagram
approximates actual sheath/core ratios.

Number of Sheath Strands

The fewer strands that it takes to build the sheath means the sheath will be thicker and take longer to abrade. 16 strand sheath construction is effectively twice the thickness of the 32 strand sheaths and three times the thickness of 48 strand sheaths used in other static ropes. The key issue is whether the rope is able to maintain its handling characteristics. A 48 carrier braid may be smooth. But it is a relatively thin sheath and may not tie as easily as a 32 carrier sheath.





RescueTECH Industrial Lifeline


High Strength Swaged Eye

NFPA Life Safety ropes with a loop permanently swaged in the end. Kernmantle rope lasts an average of 6 times longer than twisted ropes. Swaging provides a high strength, permanent eye without the hassles of knots. Our testing shows that the loop strength in swaged ropes exceeds 90% of the NFPA required rope strength. Swaged ropes are complete with a protective thimble in the eye. 1/2" Lifeline WLL: 600 lbs. 7/16" Lifeline WLL: 300 lbs. Color: Orange or Blue. **USE ONLY WITH ROPE GRABS DESIGNED FOR 1/2" KERNMANTLE ROPE.**

1/2" Lifeline	Weight	7/16" Lifeline	Weight		
598811050XX*	50 ft. 4.75 lbs.	83.00	5987111000R*	100 ft. 6.25 lbs.	120.00
598811075XX*	75 ft. 6.75 lbs.	112.00	5987111500R*	150 ft. 9.3 lbs.	170.00
598811100XX*	100 ft. 8.75 lbs.	145.00	5987112000R*	200 ft. 12.9 lbs.	225.00
598811150XX*	150 ft. 12.50 lbs.	215.00			
598811200XX*	200 ft. 16.75 lbs.	280.00			

**Replace XX with "OR"(Orange) or BL (Blue)

Meets OSHA/ANSI Requirements for Vertical Lifeline. NFPA General Use Rope. Complies with NFPA 1983. Specify NFPA Labeling Requirements when ordering.



RescueTECH Dynamic Rope

Highest Quality / Load Absorption

A dynamic rescue rope manufactured for special applications when climbing above the rigging point. Superior construction with the highest quality standards. High fall rating, low impact loads, increased resistance to abrasion. Exceeds current UIAA and CE standards for dynamic ropes. Strength: 5,500 lbf. EN 892.

Stock Number	Dia. (mm)	Description	Length (ft.)	Length (meters)	UIAA Tested As	Weight / meter (gm)	UIAA Falls Survived	Max Impact Load (kN)	80 kg Elong (%)	
5952165AM	11	Amber Mix	165	50	Single	75.2	14	9.62	4.8	190.00
5952165GR	11	Green Mix	165	50	Single	75.2	14	9.62	4.8	190.00

TECHNote™

ROPE END TERMINATION

The swaged end termination was developed after many years of research and development. Our process presses the entire length of the aluminum ferrule rather than multiple 5/16" rings along its length. The swaged termination grips the rope along the whole length of the swage to give excellent holding power and increase the user's ability to inspect the rope. This type of termination retains well over 90% of the NFPA required rope tensile strength. Our testing shows that nylon fibers stretch as a rope is loaded. This stretch causes a decrease in rope diameter that needs continuous contact to help compensate for this reduction and retain the rope's strength.



RescueTECH

Confined Space Retrieval Line

With Forged Double Locking Snap

A retrieval line that interfaces with rope rescue systems. Our proprietary process creates a loop that exceeds the strength of a Figure 8 on a bight. The custom pressing die minimizes sharp edges often found on other swaged fittings. Manufactured from 1/2" NFPA rescue rope and forged double locking snaps. The nylon retrieval line meets the NFPA General Use Rope Standards and the ANSI Z-359.1 Retrieval Line Standards. WLL: 600 lbs.

Rope Colors: Orange, Blue. **USE ONLY WITH ROPE GRABS DESIGNED FOR 1/2" KERNMANTLE ROPE.**

Weight
5988131000R* 100' (Orange) 9 lbs. 155.00
598813100BL* 100' (Blue) 9 lbs. 155.00
5988131500R* 150' (Orange) 12.75 lbs. 225.00
598813150BL* 150' (Blue) 12.75 lbs. 225.00

* Rope Certified NFPA 1983 compliant by UL. Meets Lifeline requirements for ANSI Z359.1, Retrieval Line requirement for OSHA 1910.146, and General Use Life Safety Rope Requirement for NFPA 1983.

RescueTECH

Double End

Industrial Lifeline

High Strength Swaged Eye

1/2" NFPA Rescue Rope with swaged loops on each end. Color: Orange. WLL: 600 lbs. **USE ONLY WITH ROPE GRABS DESIGNED FOR 1/2" KERNMANTLE ROPE.**

Weight
5988120750R* 75 ft. 7 lbs. 135.00
5988121500R* 150 ft. 12.75 lbs. 225.00



RescueTECH Rope Cleanser

Reformulated to clean ropes better. Excellent for nylon, polyester, or polypropylene fibers. Excellent cleanser for Harnesses, Slings, and other webbing / fabric products. Concentrated formula can be diluted to suit the dirt or stain encountered. Biodegradable.



599911 1 pint 9.00
599910 Concentrate for One Gallon 20.00

Rope Washer

Device connects to standard hose for washing or rinsing ropes. Best on light dirt or for rinsing washed ropes.



5999203 Standard (up to 1/2") 6.1 oz. 36.50
5999204 Large (up to 3/4") 8.6 oz. 36.50



Mesh Wash Sack

Great for rope washing, packaging slings, webbing, cords, and personal gear.

805401 Large 15" x 20" 6.25
805406 XLarge 24" x 30" 12.00



Whip-End-Dip

Liquid vinyl compound that seals the end of your rope. Prevents fraying and unravelling. Also, needed information can be marked on an adhesive label then coated with Whip-End-Dip to protect markings. Contents: 4 oz.

599900 White 8.25
599904 Red 8.25
599909 Clear 8.25



RescueTECH Rope Marking Labels

Self-laminating marking labels. Write or type information on the 1" x 3/4" label and wrap the clear laminating plastic over the white label. Suitable for ropes up to 5/8". The label can then be sealed to the rope with clear Whip-End-Dip. One book contains 60 labels. Weight: 1.2 oz.

5999223 Rope Marking Labels 25.00



RescueTECH Equipment I.D. Tape

Used to identify ropes, carabiners, and other equipment. Can be sealed on ropes using Whip-End-Dip or Heat Shrink Tubing. Set includes 5 colors of vinyl tape. Colors: yellow, white, Red, Green, Blue.

599930 Equipment I.D. Tape 7.50

TECHNote™

WORKING LOAD LIMIT

Working Load Limit (also known as Safe Working Load or Recommended Working Load) is defined as the maximum load that may routinely be applied to an assembly or component in straight tension. The other strength term is Ultimate Strength (or Tensile Strength). Ultimate Strength is the load at which a component or assembly will fail in a test.

We have chosen to use the NFPA ratio of 15:1 for ropes and the American engineering standard of 10:1 for critical use hardware and auxiliary equipment. We realize that these ratios may exceed proposed standards, but have selected them because they best apply to the rescue community.

We show the Working Load Limit (WLL) because the Ultimate Strength may change during the life of the product. Whereas, the WLL remains valid during the normal life of the product. For example, a 9,000 lbf. rope will lose strength as it is used. The WLL will remain 600 lbs. throughout the normal service life of the rope.

Additionally, rescue products should be chosen and matched based upon their WLL. The item with the lowest WLL limits the system working load limit. Remember, a chain is only as strong as its weakest link.



Rope Measurer

Accurately measures a wide variety of cordage from 5/32" to 3/4" diameter. Digital counter indicates feet and inches up to 999 feet 11 inches, and continues. Unit will also subtract footage. One knob quickly resets counter. Unit is ready to mount to side of 2 x 4". Also works with webbing up to 1" wide. Weight: 54 oz.

901030	Rope Measurer	225.00
901035	Wall Mounting Bracket	34.00
901036	Table Mounting Bracket	7.00



Rope Cutting Box

Ideal for cutting and sealing numerous ropes and webbing. Can be mounted to wall or workbench. Capable of cutting ropes up to 1" diameter. 120 volts AC. Blade is designed for longer use than standard blades. Weight: 39 oz.

901020	Cutting Box	120.00
901025	Replacement Blade, Box	19.00

Rope Cutting Gun

A handy tool for cutting and sealing the ends of all nylon, polyester, and polypropylene ropes and webbing. 120 volts AC, 60 cycles, 1.1 amps, 100 watts. 5 1/2 foot cord. Weight: 25 oz. 20% Duty Cycle.

901010	Cutting Gun	50.00
901015	Replacement Blade, Gun	6.50

Rope Thimble

Made from an almost indestructible polyolefin polymer that deforms rather than breaks under heavy load. Produces no sharp edges. Rope guards hold the rope in the guide grooves. Weight: 1 oz.



Rope Diameter

5999246	3/8"	1.00
5999248	7/16", 1/2"	1.35
5999249	5/8"	1.80

⚠ WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



Paint Marking Pens For Metal Parts

Permanent opaque pigmented ink valve-action marker. Ink marks opaque and glossy on light or dark surfaces. Marks on virtually any surface: metal, wood, corrugated, rubber, plastic, glass, etc. Permanent opaque pigment ink resists sun's ultraviolet rays. **NOT FOR USE ON ROPES, HARNESSSES, WEBBING OR OTHER LIFE SAFETY ITEMS MADE FROM SYNTHETIC FIBERS.**

2435100	Orange	4.95
2435101	Black	4.95
2435102	Yellow	4.95
2435104	Red	4.95
2435106	Lt. Blue	4.95
2435109	White	4.95

Heat Shrink Tubing

Clear heat shrink tubing for marking rope ends. Mark end of rope with tape, labels, etc., then slip tubing over end. Heat source shrinks tubing tightly around rope and marker. Sold by the foot.

599944	For 3/8" & 7/16"	0.47
599945	For 7/16" & 1/2"	0.75
599946	For 5/8" & 3/4"	0.85

Name / Dept.:	Division:	I.D. Number:
Unit:	Description:	Purch Date _____ Service Date _____
 ROPE LOG		
Detailed description of the form: This is a large, multi-page form designed for use with 3-ring binders. It features a header with space for name, division, and I.D. number. Below this is a section for purchase and service dates. The main body of the form is a large grid for tracking rope logs. The grid has columns for Date/Call Ed., Location, and Conditions. There are also columns for various inspection criteria, such as 'Is the rope end cut straight?', 'Is the rope end sealed?', and 'Is the rope end cut at the correct angle?'. A 'Check-off' column is provided for each row. The bottom of the form includes a 'Return to Service' section and a 'Comments' area.		

Rope Log Sheets

Full Size Pages for 3-Ring Binders

Printed on Rite-In-The-Rain All-Weather Paper for durability. Sheets include generous space for Date, Call/Rescue I.D., Location, and conditions. Rescue Technology Rope Log Sheets also offer standardized Inspection Criteria "Check-offs" for each use. This helps ensure consistent inspection data for each use. Hole-punched for standard 3 Ring binders. Cover includes inspection criteria information as well as care and use information. Set includes 10 Sheets that are printed on both sides giving space for 280 entries.

599303	Rope Log Sheet	7.50
--------	----------------	------






RescueTECH Multi-Unit Edge Roller

Webbing Linkage

Our original M.U.E.R. now links with a length of webbing. Webbing linkage allows the unit to be used to provide large area protection. Units may be linked together. Low Profile design. All units 5.75" wide.



		Units	
611213	Medium	3	208.00
611214	Long	4	278.00

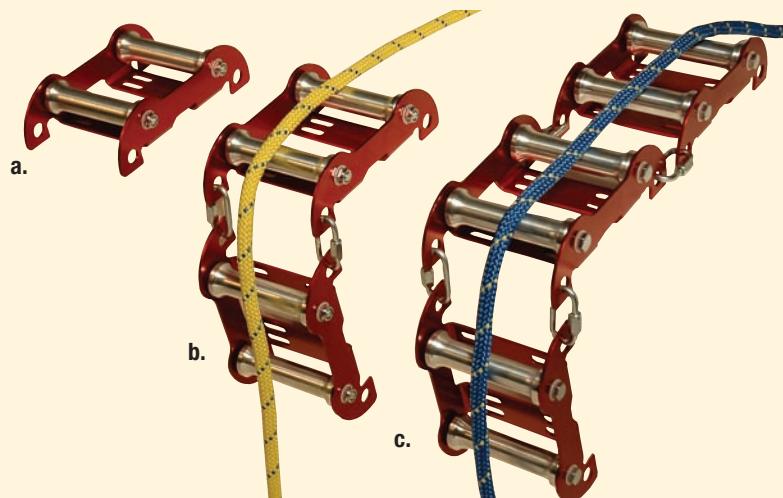

RescueTECH Multi-Unit Edge Roller

Rapid LinkConnectors

An all-new edge protection device from RescueTECH. Featuring an alloy aluminum frame and rollers, this unit may be used as a single unit or paired-up with other units to provide large area protection using included rapid link. Low Profile design. All units 5.75" wide.

a.	611111	XSmall	Units	Length	
b.	611112	Small	2	17.75"	150.00
c.	611113	Medium	3	26.50"	210.00
	611114	Long	4	35.25"	285.00
	60510106	Connector Link			2.20



Left: Wide Rope Pad Right: Narrow Rope Pad with Velcro



RescueTECH Rope Pad

Super-Heavyweight Cotton Duck

Large 100% cotton rope pads are 2 layers thick in the center and use no synthetic material on its protective surface. Narrow pad with velcro will wrap around rope - secures with hook and loop fastener. Wide pad provides large area coverage. Both pads come complete with rigging grommets for tie-back cords. Color: Natural.

Dimensions

612101	Narrow	36 x 12"	21.00
612100	Narrow w/ Velcro	36 x 12"	27.00
612105	Wide	36 x 30"	24.00
612110	Extra Long	36 x 60"	34.00



RescueTECH

One Piece Edge Roller

Single Unit Edge / Roof Roller

Fully protects rope from corners and other points of friction. Uses aluminum rollers mounted on Oilite® bushings for extended wear. Alloy aluminum construction, steel fittings. Lightweight and low profile. Four connecting points for easy attachment and linking units together. Works best on 90 degree corners like window ledges or parapet walls. Can also be used as small diameter hose roller. Tensile Strength: 10,000 lbf. Dimensions: 5" x 9". Weight: 30 oz. Color: Gold. Rating: General Use.


611101 One Piece Edge Roller 110.00

Exceeds NFPA 1983/ANSI/OSHA strength specifications.

Length

612412X	Small	12"	15.25
612418X	Medium	18"	17.00
612424X	Large	24"	19.00
612436X	XLarge	36"	23.00



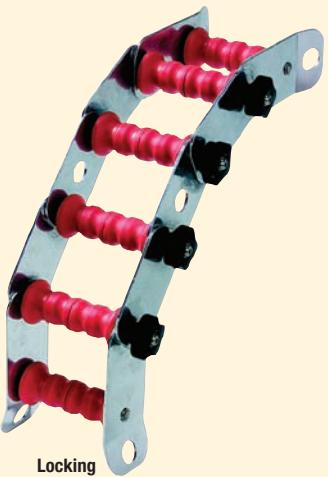

Locking



Non-Locking
rope not included

Rope Management Roller

Unique Multi-Roller Design

Edge roller protects your rope from abrading over sharp edges. Multiple sections allow unit to conform to almost any surface. Sections will "lock" into a shape using the twist-lock handles. The rollers ability to conform to a shape and then lock allows the unit to better hold the surface. Ideal for bridges and parapet walls.

		Length	Weight	
611117	Locking, 5 sections	19.5"	58.2 oz.	260.00
611118	Non-Locking, 3 section	15.75'	31.2 oz.	130.00



All Terrain Edge Protector (A.T.E.P.)

High Stability Flexible Edge Protector

Low profile (2.23") allows litter to be easily raised over unit. Aluminum shafts protect on all types of edges such as 90 degree building edges, boulders, structural steel. Two units can be linked together to protect longer lengths. Standard 22" unit is longer than three connected units of other manufacturers. Standard unit folds to 7" cube for easy storage. Sideplates manufactured of alloy aluminum.

	Dimensions	Weight	Rating	
611010	A.T.E.P., Standard	22" x 6" x 2 1/4"	38 oz.	General
611011	A.T.E.P., Long	30" x 6" x 2 1/4"	50 oz.	General

*Exceeds NFPA 1983/ANSI/OSHA strength specifications.
U.S. Patent # 4,869,466*



Nylon Stuff Sack

Lightweight bags to stow small parts, equipment and personal gear. Manufactured of 200 den pack cloth with drawstring closure. Close with spring-loaded cordlock. Color: Blue

805216	Small	10.5" x 4.5"	6.75
805316	Medium	12.5" x 5"	8.00



Mesh Stuff Sack

This unique and versatile stuff sack has all of the advantages of a mesh bag with the durability of a nylon bag. Great for organizing gear or storing anything that you need to see.

22821452	Small	(5 x 8")	4.75
22821453	Medium	(6.5 x 12")	5.75
22821454	Large	(8 x 15")	6.50
22821455	XLarge	(10 x 18")	8.00
22821456	XXLarge	(18 x 27")	10.25



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



RescueTECH Rope Bags

Super-Durable Construction

Constructed of heavy duty water resistant Cordura™ nylon and nearly-indestructible Ballistic Nylon fabrics. Side seams of bags are double-stitched so that no fabric edges are exposed for fraying. Bottom seam is double stitched and webbing reinforced for superior strength and resistance to abrasion. Drawstring closure with cord lock. Accommodates rope (capacities listed) or equipment. All units except personal size have log book pouches and grommets in bottom to permit drainage. Handles connected to interior of bag. Specify color.



Yellow

Orange

Red

Royal Blue

Forest Green

Black



Tough 1000 Denier
Cordura® Body

Durable Ballistic
Fabric Bottom

Double Stitched and
Taped Bottom Seam

Double Stitched
Side Seam

No Exposed Fabric
Edge to Unravel

Drainage Grommet
in Bottom

Heavy Duty Cord-Lock
Adjusts Drawstring

Interior Log Pouch

Description	Capacity (ft.)			Dimensions (in.)		Shoulder		
	7/16"	1/2"	5/8"	Height x Dia.	Handles	Straps	Colors	
80111X Personal	45			12 x 6	2	n/a	OR, BK, BL	16.50
80121X Small	175	125	75	10 x 10	2	n/a	OR, BK, BL, RD, YE, GR	25.00
80131X Medium	300	225	125	17 x 10	2	1	OR, BL, BL, RD, YE, GR	32.00
80141X Large	400	325	200	23 x 10	2	2	OR, BL, BL, RD, YE	40.00
80151X XLarge	600	500	250	17 x 14	2	2	OR, BK, BL, RD	48.00
80161X Super	750	600	325	23 x 14	2	2	OR, BK, BL	52.00
80171X Jumbo	1150	900	500	23 x 17	2	2	OR, BK	60.00

Replace X: 0= Orange; 1=Black; 2= Yellow; 4=Red; 5=Green; 6=Blue.



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.

Rope and Equipment Bags

With Attached Equipment Pockets and Padded Shoulder Straps

Constructed of heavy duty water resistant Cordura™ nylon and nearly-indestructible Ballistic Nylon fabrics. Side seams of bags are double-stitched so that no fabric edges are exposed for fraying. Bottom seam is double stitched and webbing reinforced for superior strength and resistance to abrasion. Drawstring closure with cord lock. Accommodates rope (capacities listed) or equipment. Handles connected to interior of bag. Rope capacity: Medium: 20" h x 10" d fits 7/16"- 300 ft. or 1/2"- 225 ft.; Large: 25" h x 10" d fits 7/16"- 400 ft. or 1/2"- 325 ft. Specify color.

807434	Medium (Red) w/ 1 Pocket	67.00	807444	Large (Red) w/ 2 Pockets	78.00
807436	Medium (Blue) w/ 1 Pocket	67.00	807446	Large (Blue) w/ 2 Pockets	78.00
807431	Medium (Black) w/ 1 Pocket	67.00	807441	Large (Black) w/ 2 Pockets	78.00





Reflective PVC Rope Bag

As durable as it is visible at night. Manufactured of 14 oz. nylon reinforced PVC fabric and an 18 oz. nylon reinforced PVC Fabric bottom. Dimensions: Small: 18" h x 10" d; Medium: 20" h x 10" d.; Large: 18" h x 12" d.

		Capacity	
802204	Small	200 ft. of 1/2"	47.00
802304	Medium	300 ft. of 1/2"	52.00
802404	Large	500 ft. of 1/2"	65.00

The newest bag from RescueTECH features semi-rigid sides to hold the bag open while loading rigging equipment and rope. Great for litter bridles and patient lashing as well as pre-rigged hauling kits. The main compartment has the same nylon fabric closure designed to keep the smallest items from escaping. 4 cordura pockets (with elastic closure) and 1 mesh side pockets for storing quickly needed equipment. Bottom is made from Ballistic Nylon for proven resistance to abrasion.

803302 45.00



Equipment not included.

RescueTECH Search Line Shoulder Bag

Holds 200 ft. of 6mm Search Line

A new "Over-the-Shoulder" bag that easily holds up to 200 ft. of PROBE™ Search Line. Manufactured of tough Ballistic Nylon to a major Texas city's specification. Inside strap system pre-tensions the cord for an even deployment. Adjustable shoulder strap may be worn on one shoulder or across the body and is easily donned and doffed. Dimensions: 11" x 9" x 5"

800121 Searchline Shoulder Bag 40.00



Rigging Bucket Semi-Rigid Design

The newest bag from RescueTECH features semi-rigid sides to hold the bag open while loading rigging equipment and rope. Great for litter bridles and patient lashing as well as pre-rigged hauling kits. The main compartment has the same nylon fabric closure designed to keep the smallest items from escaping. 4 cordura pockets (with elastic closure) and 1 mesh side pockets for storing quickly needed equipment. Bottom is made from Ballistic Nylon for proven resistance to abrasion.



803302 45.00



Equipment not included.

Fire-Resistant Escape / Search Bag

Fire Resistant Defender 750

A new design for drop bags featuring a **lined, 2-layer construction**. Double-rollover closure protects cord while easing access with structural firefighting gloves. Attaches to harness waist belts. Manufactured of Defender 750™. All seams double stitched for extra durability. Color: Red. Closed dimensions: XSmall: 6 x 5 x 3"; Small: 6 x 6 x 3"; Medium: 7 x 6 x 3"; Large: 9 x 6 x 5"

8001414	XSmall	25 ft. Escape Rope	34.00
8001424	Small	35 ft. Escape Rope	36.00
8001434	Medium	50 ft. Escape Rope	40.00
8001444	Large	70 ft. Escape Rope	46.00



Equipment not included.

Nylon Escape / Search Bag

Lined, 2-Layer construction for extra strength and durability. All seams double stitched for extra durability. Color: Orange.

Closed dimensions: XSmall: 6 x 5 x 3"; Small: 6 x 6 x 3"; Medium: 7 x 6 x 3"; Large: 9 x 6 x 5"

8001310	XSmall	25 ft. Escape Rope	25.50
8001320	Small	35 ft. Escape Rope	26.25
8001330	Medium	50 ft. Escape Rope	28.00
8001340	Large	70 ft. Escape Rope	32.00



Nylon Drop Bag

Durable 1000 denier Construction

Designed to hold our 8mm EGRESS™ Personal Escape Rope and PROBE™ Search Line kits, this Drop Bag is perfect to "create-your-own" rescue kit. Hinged Lid with snap closure. Retro-reflective tab makes this bag highly visible and easy to open with structural firefighting gloves. Attaches to Escape Belt and Harnesses. Waist attachment converts to shoulder strap. Color: Red. Dimensions: Sm: 9 x 3"; Med: 10 x 7 x 4"; Lg: 12 x 7 x 5"

800520	Small	35' of 8mm Cord	28.00
800521	Medium	70' of 8mm Cord	30.00
800522	Large	100' of 8mm Cord	32.00




Quick-Release Belt
Snap System

Front equipment pouch
separates hooks and
snaps from rope.

RescueTECH Escape / Search Bags feature:



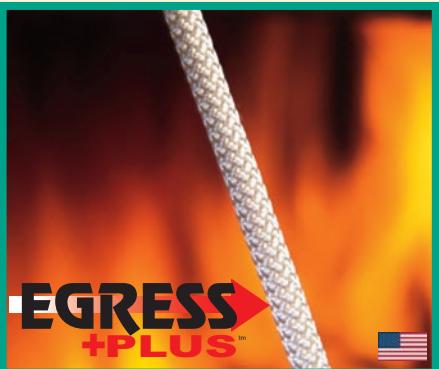

EGRESS+Plus™

Personal Escape Rope

100% Technora Fire Resistant

Superstrong, 100% Technora construction provides both sheath and core resistance to fire and heat. Diameter: 7.5mm Heat Resistance: >900° Strength: 4,000 lbf.

52628000	EGRESS+Plus™ P.E.R. x ft.	1.61
52628025	EGRESS+Plus™ P.E.R. x 25'	41.00
52628035	EGRESS+Plus™ P.E.R. x 35'	56.00
52628050	EGRESS+Plus™ P.E.R. x 50'	81.00
52628075	EGRESS+Plus™ P.E.R. x 75'	112.75
52628100	EGRESS+Plus™ P.E.R. x 100'	161.00

Precut lengths are finished with a special sealant to prevent unravelling.



EGRESS+Plus - FR/Hook

EGRESS+Plus™ PER w/ Sewn Eye & Hook
RescueTECH Fire-Resistant Nomex Pouch
RescueTECH ESCAPE Descender
AutoLock Carabiner

5253011025	EGRESS+Plus™ FR/Hook, 25 ft.	190.00
5253011035	EGRESS+Plus™ FR/Hook, 35 ft.	205.00
5253011050	EGRESS+Plus™ FR/Hook, 50 ft.	230.00
5253011070	EGRESS+Plus™ FR/Hook, 70 ft.	265.00



EGRESS+Plus Standard/Hook

EGRESS+Plus™ PER w/ Sewn Eye & Hook
RescueTECH Nylon Pouch
RescueTECH ESCAPE Descender
AutoLock Carabiner

5253021025	EGRESS+Plus™ Std/Hook, 25 ft.	184.00
5253021035	EGRESS+Plus™ Std/Hook, 35 ft.	200.00
5253021050	EGRESS+Plus™ Std/Hook, 50 ft.	225.00
5253021070	EGRESS+Plus™ Std/Hook, 70 ft.	257.00



EGRESS+Plus - FR/Snap

EGRESS+Plus™ PER w/ Sewn Eye & Snap
RescueTECH Fire-Resistant Nomex Pouch
RescueTECH ESCAPE Descender
AutoLocking Aluminum Carabiner

5253012025	EGRESS+Plus™ FR/Snap, 25 ft.	125.00
5253012035	EGRESS+Plus™ FR/Snap, 35 ft.	143.00
5253012050	EGRESS+Plus™ FR/Snap, 50 ft.	167.00
5253012070	EGRESS+Plus™ FR/Snap, 70 ft.	200.00



EGRESS+Plus Standard/Snap

EGRESS+Plus™ PER w/ Sewn Eye & Snap
RescueTECH Nylon Pouch
RescueTECH ESCAPE Descender
AutoLocking Aluminum Carabiner

5253022025	EGRESS+Plus™ Std/Snap, 25 ft.	121.00
5253022035	EGRESS+Plus™ Std/Snap, 35 ft.	135.00
5253022050	EGRESS+Plus™ Std/Snap, 50 ft.	160.00
5253022070	EGRESS+Plus™ Std/Snap, 70 ft.	192.00



EGRESS - FR/Hook

EGRESS™ PER w/ Sewn Eye & Hook
RescueTECH Fire-Resistant Nomex Pouch
RescueTECH ESCAPE Descender
AutoLocking Carabiner

5253111025	EGRESS™ FR/Hook, 25 ft.	186.00
5253111035	EGRESS™ FR/Hook, 35 ft.	198.00
5253111050	EGRESS™ FR/Hook, 50 ft.	218.00
5253111070	EGRESS™ FR/Hook, 70 ft.	248.00



EGRESS Standard/Hook

EGRESS™ PER w/ Sewn Eye & Hook
RescueTECH Nylon Pouch
RescueTECH ESCAPE Descender
AutoLocking Carabiner

5253121025	EGRESS™ Std/Hook, 25 ft.	180.00
5253121035	EGRESS™ Std/Hook, 35 ft.	192.00
5253121050	EGRESS™ Std/Hook, 50 ft.	212.00
5253121070	EGRESS™ Std/Hook, 70 ft.	240.00



FR Version-Snap:

EGRESS™ PER w/ Sewn Eye & Snap
RescueTECH Fire-Resistant Nomex Pouch
RescueTECH ESCAPE Descender
AutoLocking Aluminum Carabiner


5253112025	EGRESS™ FR/Snap, 25 ft.	121.00
5253112035	EGRESS™ FR/Snap, 35 ft.	135.00
5253112050	EGRESS™ FR/Snap, 50 ft.	155.00
5253112070	EGRESS™ FR/Snap, 70 ft.	188.00



Standard Version-Snap:

EGRESS™ PER w/ Sewn Eye & Snap
RescueTECH Nylon Escape Pouch
RescueTECH ESCAPE™ Descender
AutoLocking Aluminum Carabiner

5253122025	EGRESS™ Std/Snap, 25 ft.	117.00
5253122035	EGRESS™ Std/Snap, 35 ft.	130.00
5253122050	EGRESS™ Std/Snap, 50 ft.	150.00
5253122070	EGRESS™ Std/Snap, 70 ft.	175.00

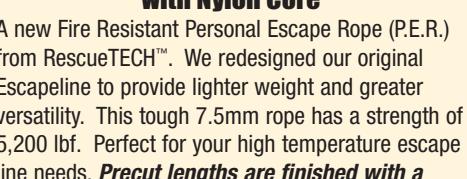

EGRESS™

Personal Escape Rope

100% Technora Sheath with Nylon Core

A new Fire Resistant Personal Escape Rope (P.E.R.) from RescueTECH™. We redesigned our original Escapeline to provide lighter weight and greater versatility. This tough 7.5mm rope has a strength of 5,200 lbf. Perfect for your high temperature escape line needs. **Precut lengths are finished with a special sealant to prevent unravelling.**

52618000	EGRESS™ P.E.R. x ft.	1.12
52618025	EGRESS™ P.E.R. x 25'	28.00
52618035	EGRESS™ P.E.R. x 35'	39.50
52618050	EGRESS™ P.E.R. x 50'	56.00
52618070	EGRESS™ P.E.R. x 70'	78.50
52618100	EGRESS™ P.E.R. x 100'	112.00

Warning: Small diameter cords do not provide the same amount of rappelling friction as do larger ropes. Rescuers should practice rappelling with an 8mm cord to become familiar with the 8mm diameter lines. NFPA 1983 states that Personal Escape Ropes are for single use only. *Specifications provided by E.I. DuPont De Nemours Co.





EGRESS-Hybrid - FR/Hook

EGRESS-Hybrid™ PER w/ Sewn Eye
RescueTECH Fire-Resistant Nomex Pouch
RescueTECH ESCAPE Descender
Escape Hook &AutoLock Carabiner

5253211025	25', EGRESS-Hybrid™ Kit	180.00
5253211035	35', EGRESS-Hybrid™ Kit	190.00
5253211050	50', EGRESS-Hybrid™ Kit	205.00
5253211070	70', EGRESS-Hybrid™ Kit	230.00



EGRESS-Hybrid - FR/Snap

EGRESS-Hybrid™ PER w/ Sewn Eye
RescueTECH Fire-Resistant Nomex Pouch
RescueTECH ESCAPE Descender
RescueTECH Escape AutoLock Snap
AutoLocking Aluminum Carabiner

5253212025	25', EGRESS-Hybrid™ Kit	114.00
5253212035	35', EGRESS-Hybrid™ Kit	125.00
5253212050	50', EGRESS-Hybrid™ Kit	142.00
5253212070	70', EGRESS-Hybrid™ Kit	165.00



EGRESS-Hybrid Standard/Hook

EGRESS-Hybrid™ PER w/ Sewn Eye
RescueTECH Nylon Pouch
RescueTECH ESCAPE Descender
Escape Hook &AutoLock Carabiner

5253221025	25', EGRESS-Hybrid™ Kit	175.00
5253221035	35', EGRESS-Hybrid™ Kit	184.00
5253221050	50', EGRESS-Hybrid™ Kit	200.00
5253221070	70', EGRESS-Hybrid™ Kit	223.00



EGRESS-Hybrid Standard/Snap

EGRESS-Hybrid™ PER w/ Sewn Eye
RescueTECH Nylon Pouch
RescueTECH ESCAPE Descender
RescueTECH Escape AutoLock Snap
AutoLocking Aluminum Carabiner

5253222025	25', EGRESS-Hybrid™ Kit	109.00
5253222035	35', EGRESS-Hybrid™ Kit	119.00
5253222050	50', EGRESS-Hybrid™ Kit	135.00
5253222070	70', EGRESS-Hybrid™ Kit	156.00



Pattern may differ slightly from image.

EGRESS-Hybrid™ Personal Escape Rope

New Aramid / Polyester Technology

The 7.5mm EGRESS-Hybrid™ rope is a blend of aramid and polyester fibers. The tough, fire-resistant aramid fibers in the sheath give the rope its strength and durability. While the polyester fibers lighten the weight and provide greater visibility. The end result is a strong, heat resistant cord that is lighter in weight and more economical than PER made from 100% aramid fibers. Strength: 4,000 lbf.

52617000	EGRESS-Hybrid™ PER x ft.	0.87
52617025	EGRESS-Hybrid™ PER, 25'	23.50
52617035	EGRESS-Hybrid™ PER, 35'	32.00
52617050	EGRESS-Hybrid™ PER, 50'	45.00
52617070	EGRESS-Hybrid™ PER, 70'	62.00
52617100	EGRESS-Hybrid™ PER, 100'	88.00



50 ft. Kit



100 ft. Kit

EGRESS-N™ Kits

A non-aramid version of our popular EGRESS Kits. Assembled using our EGRESS-N Nylon/Polyester™ NFPA Personal Escape Rope, Nylon Escape pouch, AutoLocking Rigging Carabiners, and RescueTECH ESCAPE Descender. To use, simply open outer pouch, grasp the Autolocking Rigging Carabiner, and pull from bag. The 8mm EGRESS-N™ Personal Escape Rope (NFPA) makes this PER an economical choice over the fire-resistant EGRESS™. Manufactured of Nylon and Polyester, this certified cord works well with most Escape Descenders. Strength: 5,000 lbf. **CUSTOM LENGTHS AVAILABLE**

Warning: EGRESS-Nylon is not fire or heat-proof. Polyester begins to lose strength at 300 °F. Small diameter cords do not provide the same amount of rappelling friction as do larger ropes. Rescuers should practice rappelling with an 8mm cord to become familiar with the 8mm diameter lines. NFPA 1983 states that Personal Escape Ropes are for single use only.

5253328025	25' EGRESS-N™ (White/Blue)	100.00
5253328035	35' EGRESS-N™ (White/Blue)	109.00
5253328050	50' EGRESS-N™ (White/Blue)	120.00
5253328070	70' EGRESS-N™ (White/Blue)	136.00
5253328100	100' EGRESS-N™ (White/Blue)	152.00

5253428025	25' EGRESS-N™ (Yellow/White)	105.00
5253428035	35' EGRESS-N™ (Yellow/White)	114.00
5253428050	50' EGRESS-N™ (Yellow/White)	125.00
5253428070	70' EGRESS-N™ (Yellow/White)	142.00
5253428100	100' EGRESS-N™ (White/Blue)	160.00



EGRESS-N™ Personal Escape Rope

EGRESS-N gives firefighters an economic alternative to high priced aramid ropes. The 8.5mm EGRESS-N is certified to NFPA 1983 as a Personal Escape Rope. Strength: 4,026 lbf.

52818000	EGRESS-N™ x ft. (WH/BL)	0.74
52818025	EGRESS-N™, 25' (WH/BL)	19.00
52818035	EGRESS-N™, 35' (WH/BL)	26.00
52818050	EGRESS-N™, 50' (WH/BL)	36.00
52818070	EGRESS-N™, 70' (WH/BL)	49.50
52818100	EGRESS-N™, 100' (WH/BL)	72.00

52828000	EGRESS-N™ x ft. (YE/WH)	0.77
52828025	EGRESS-N™, 25' (YE/WH)	21.00
52828035	EGRESS-N™, 35' (YE/WH)	28.00
52828050	EGRESS-N™, 50' (YE/WH)	39.50
52828070	EGRESS-N™, 70' (YE/WH)	55.00
52828100	EGRESS-N™, 100' (YE/WH)	78.00





RescueTECH SearchLine Shoulder Bag Kit

Holds 200 ft. of 6mm Search Line

A new "Over-the-Shoulder" bag that easily holds up to 200 ft. of PROBE™ Search Line.

Manufactured of tough Ballistic Nylon to a major Texas city's specification. Inside strap system pretensions the cord for an even deployment.

Adjustable shoulder strap may be worn on one shoulder or across the body. Kits are packaged with 200 feet of 6mm Search Line and Fixed Eye Autolocking Snap. Dimensions: 11" x 9" x 5".

299822200	PROBE™ Kit	235.00
299822200R	PROBE-R™ Kit	255.00
299822200H	PROBE-Hybrid™ Kit	185.00



PROBE-R Search Line w/ Snap

Patterned after a major N.E. cities version, the RescueTECH Search Rope w/ Snap combine our PROBE-R Technora / Polyester Reflective Search Rope w/ our Double Locking Escape Snap and Swivel Trigger Snap. Durable I.D. labels are sealed under heat shrink tubing.

299722200	200 ft.	250.00
299722100	100 ft.	150.00
299722050	50 ft.	90.00



PROBE™ FR Search Line

Fire / Heat Resistant Sheath

6mm sheath made from Fire Resistant Aramid fiber for extreme durability and resistance to heat (900° F). Firm, yet flexible, design is superior to "Hollow or Flat" braid construction. Maintains cross-section so cord can be easily felt on the floor. Strength: 2,400 lbf. **Precut lengths are finished with a special sealant to prevent unravelling.**

52716000	PROBE™ x ft.	0.88
52716035	PROBE™, 35'	33.50
52716050	PROBE™, 50'	47.00
52716070	PROBE™, 70'	65.00
52716100	PROBE™, 100'	91.00




PROBE-R™ FR Search Line - Reflective

Fire Resistant with Reflective Stripe

Constructed using the same materials as the standard PROBE™ Search Line with the addition of a 3M Scotchlite® retro-reflective stripe. Strength: 2,400 lbf. **Precut lengths are finished with a special sealant to prevent unravelling.**

52716000R	PROBE-R™ x ft.	0.99
52716035R	PROBE-R™, 35'	37.00
52716050R	PROBE-R™, 50'	52.00
52716070R	PROBE-R™, 70'	72.00
52716100R	PROBE-Rv, 100'	102.00

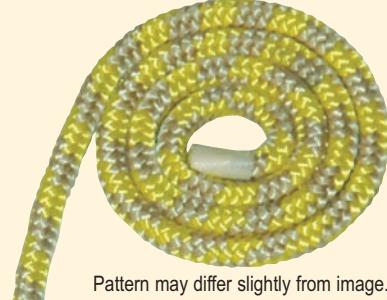

PROBE-Hybrid™ Search Line

Aramid / Polyester Hybrid

PROBE- Hybrid rope uses both Fire Resistant Aramid Fibers and Polyester to create a highly visible and economical search rope. All of the cord's strength is derived from the Aramid Fiber. The bright Yellow polyester fibers act as a heat indicator. At 350°F the polyester fibers melt leaving the load bearing aramid in place for safety backup. Strength: 2,000 lbf. **Precut lengths are finished with a special sealant to prevent unravelling.**

52736000	PROBE-Hybrid™ x ft.	0.74
52736035	PROBE-Hybrid™, 35'	26.50
52736050	PROBE-Hybrid™, 50'	37.50
52736070	PROBE-Hybrid™, 70'	52.00
52736100	PROBE-Hybrid™, 100'	75.00



PROBE™ Search Line Kits

Fire-Resistant Design

6mm cord with fire resistant sheath (Temp 900°F). 6mm cord can be felt on ground unlike units made with flat webbing. Bags are specially designed for easy deployment with structural gloves. Autolocking Fixed Eye Snap prevents accidental detachment of carabiner from its anchor. Fixed Eye prevents PROBE™ Search line cord from becoming detached from carabiner. Retro-reflective tape increases visibility of bag. Notice: PROBE™ search cord is not NFPA Personal Escape Line and cannot be used for a Personal Escape rope.

29985035	35 ft.	85.00	29985070	70 ft.	122.00
29985050	50 ft.	100.00	29985100	100 ft.	156.00



PROBE-R™ Search Line Kits

Fire-Resistant with Reflective Stripe

The same high quality materials and design as our original PROBE™ Search Line with 3M Scotchlite® added to the sheath. Provides extra visibility of Search Lines during fire operations. Notice: PROBE-R™ search cord is not NFPA Personal Escape Line and cannot be used for a Personal Escape rope.

29985035R	35 ft.	88.00	29985070R	70 ft.	129.00
29985050R	50 ft.	105.00	29985100R	100 ft.	168.00



PROBE-Hybrid Kit shown with Snap deployed and ready to use



Two separate inside pockets keep search lines separate from end termination hardware.



Reflective "Tab" is connected to search snap making deployment easier.



Basic Search Kits

Now Available with Captive Eye Carabiner

A basic Search Kit featuring our 7mm Nylon SearchLine cord. These kits offer a protective search line at an economical price. Cord is stored in our durable Escape / Search Bags made from Cordura and Ballistic Fabrics. Closes with a snap with Scotchlite® pull tab. Autolocking Aluminum Search Snap at end of cord can be clipped to rigging point or back onto search line. Bag attaches to waist belt of SCBA or Rescue harness or worn on shoulder with attached strap. Kit includes Bag, Cord, and Carabiner. Notice: PROBE-Nylon™ search cord is not NFPA Personal Escape Line and cannot be used for a Personal Escape rope.

299813035	35 feet	55.00
299813050	50 feet	63.00
299813100	100 feet	82.00



100 ft. model shown





Firefighter Ladder Rescue System

Containing the RescueTECH Spin-Lock Double Pulley, this rescue set provides a free-running 3:1 Block and tackle that does double duty as a friction lowering device. The Spin-Lock Pulley works as a capstan lowering device that provides friction while lowering the firefighter. Proper safety precautions, such as separate brakes or rope grabs are to be used when in both raise and lower modes. Sling attaches around ladder beams or to suitable rigging point above victim. Packaged ready-to-use in RescueTECH Rigging Bucket.

299845075 2 Story 450.00
299845120 3 Story 500.00



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.

RescueTECH Spin-Lock 1 way pulley

Auto-Locking Carabiners



Drag Handles on Both Ends

Compartment Dimensions

Main: 24" x 12" x 12"
Searchline: 2" x 12" x 12"
Mask: 6" x 12" x 12"

Equipment not included.

High Temperature Retro-Reflective Stripes.
Skid Plate for Extra Wear Protection

Zippered Searchline Pouch for Easy Stowing
Two 22" External Gusseted Tool Pouches



Mask Pouch w/ Drag Handle

Deluxe RIT Emergency SCBA Pack

Includes 2 Full-Length Exterior Tool Pouches and Skid Plate

The Deluxe RIT Emergency SCBA Pack is the next generation in multi-use RIT Packs. Comprised of 5 compartments, this pack will hold what your team needs for RIT operations. Main Compartment designed for a full SCBA Backpack. Search line pouch holds 200 ft. of 8mm Searchline. Mask pouch has a regulator hose "pass-through" to the padded main compartment. 22" side compartments holds tools and individual search line bags. Pack features included L.E.D. Strobe for extra visibility. Replaceable Skid plate extends life of the bag.

299625103 Deluxe RIT Pack 165.00
299625103S Skid Plate, Replacement 28.00



SearchLine Master Pack™ shown with two (2) 100 ft. Master Lines and six (6) 35 ft. Search lines

SearchLine Master Pack™

4/6/8 Person RIT Search Line Set

A Searchline Set ready to deploy for Rapid Intervention. The Master Pack consists of a high quality carrying bag made from 1000 den cordura, Ballistic Cloth, and closed cell foam. Zippered inside pouches can hold items up to 18" in length. Extra room in main compartment can hold tools up to 22" long. Dimensions: 23" L x 12" W x 8" D. The pack contains two (2) 100 foot master deployment lines and six (6) search lines (select 35 ft. or 50 ft. models.) Available with PROBE™ Fire Resistant Aramid Search Line or PROBE-R™ Fire Resistant Search Lines w/ Reflective Stripe

29982006135	35' Probe™	900.00	29982006235	35' Probe-Reflective™	950.00
29982006150	50' Probe™	985.00	29982006250	50' Probe-Reflective™	1050.00
29961800	Master Pack, Carrying Bag Only	85.00			



Marker™ Search Rope

Complete with 2" Rings and Directional Marking

7.5mm RescueTECH Egress™ rope complete with 2" rings every 25 ft. Rope is marked with 3/4" nylon balls to indicate distance and direction (3 balls = 75 ft.). Using the phrase "Ring, then Bump = Out to the Pump", a firefighter can identify direction and distance to the exit. Kit includes 200 ft. with Autolocking snap sewn to each end and a Searchline Shoulder bag with quick release seatbelt buckles.

299723200

500.00



Window Rappel Anchor

Skedco's unique anchor design allows escape from burning buildings where there are no other anchors available. This is your "Last Chance Bailout" anchor. It will fold to be carried in a holster or bailout kit. When used, the ends are extended, a carabiner is placed into the holes in both parts and the anchor is placed into the lower corner of a window and a rope is attached.

It is necessary to keep tension on your rope to prevent the anchor from slipping out of position. This anchor keeps your rope farther away from the flames which gives you a little more time to descend to safety.

Deployed measurements: 10 5/8" x 3" x 5/8". MBS 5,000 lbs. Available in Red or Black. Made in USA.

21177654 Red 77.00
21177651 Black 77.00

DISCLAIMER: Firefighter escape requires instruction and training. Firefighting and associated operations are dangerous and may cause injury or death. It is every firefighter's responsibility to be trained and knowledgeable on their equipment and its intended use.



Autolocking Aluminum Search Line Snap

The Autolocking Aluminum Search Line snap was selected by RescueTECH for its Searchline bags because of its ease of use and dependability. Manufactured of forged aluminum, the autolocking gate is easy to open with structural firefighting gloves. Dimensions: 5.5" x 2.75". Strength: 6,700 lbf.

20149014 AutoLock Escape Snap 32.00



Search Line Swivel Snap

This swivelling connector is the perfect snap to use for connecting the bitter end of a searchline to the search bag. The gate construction provides an easy to use, straight pull release. Gate opening: 5/8". Dimensions: 2.75" x 1". Non-Load bearing use only.

20465013 Search Line Swivel Snap 3.00



Escape Hook

Certified to NFPA 1983

The escape hook is to be used as an anchor in an engineered system for firefighter escape applications or as a component of a system specifically designed by a qualified person for firefighter escape. The user must be trained in the proper usage of the system. The saddle of the hook is designed to easily fit around pipes or framework, and the machined tip is rated for full Working Load Limit. Meets the requirement of NFPA 1983 -Light-Use Auxiliary Equipment. Designed in conjunction with FDNY Research Division. Dimensions: 6.74" x 3.658". Width of Opening: 2.14 in. Weight: .79 lbs.

2416104 Escape Hook 65.00

DISCLAIMER: Firefighter escape requires instruction and training. Firefighting and associated operations are dangerous and may cause injury or death. It is every firefighter's responsibility to be trained and knowledgeable on their equipment and its intended use.



ISC RIT Recovery Hook

For Turnout Rescue Loop Attachment

Strong, yet lightweight, alloy aluminum locking hooks easily attach to NFPA Drag Loops. Webbing and rope slings can be attached to the rigging eye. Locking mechanism is easy to use while wearing structural gloves. Dimensions: 9.5" x 5". Throat Opening: 2.325". Weight: 17 oz. Strength: 8,993 lbf. Gate Side Load Strength: 3,148 lbf. Rating: General Use.

20149994 Recovery Hook 45.00

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.





RIT Recovery Sling - SNAP

Presewn Recovery Sling

Sling is actually two heavy duty slings (joined with high strength industrial snaps) that can be separated and used by one, two, or multiple personnel. The snap may be attached to a turnout coat rescue strap, SCBA strap, or back to the second strap. The sling has an included hook & look strap that compactly holds the folded unit for storage in the included carrying pouch or turnout pocket. Overall Length: 56".

29967230

62.00



RIT Recovery Sling - HOOK

A Presewn Recovery Sling

We designed this product with RIT Team personnel in mind. The sling is actually two heavy duty slings (joined with high strength industrial snaps) that can be separated and used by one, two, or multiple personnel. The hook may be attached to a turnout coat rescue strap, SCBA strap, or back to the second strap. The sling has an included hook & loop strap that compactly holds the folded unit for storage in the included carrying pouch or turnout pocket. Overall Length: 60".

29967220

85.00



Firefighters' RIT Rescue Sling

Easy Deployment / Multi-Use Rescue Tool

Designed to be a helping hand during fire rescue activities. Easily attached pouch is designed to fit all waist belts and to keep the sling available at all times. Simply grasp the hand loops and pull to deploy this 7 ft. sling. Contoured hand loops are easily grasped by structural firefighting gloves. Multiple uses: RIT, Search, Utility. Can be linked together to help with large area searches. Length: 80".

29967420 Rescue sling

17.00



RIT FR Rescue Sling

Fire Resistant High Strength Sling and Belt Pouch

Based on the design of our Firefighters' RIT Rescue sling, the FR Sling is manufactured of Fire Resistant Webbing featuring Kevlar® brand fire resistant fibers. Easily attached Fire Resistant pouch is designed fit all waist belts and to keep the sling available at all times. Simply grasp the hand loops and pull to deploy this 7 ft. sling. Contoured hand loops are held open by an internal stiffener and is easily grasped by structural firefighting gloves. Multiple uses: RIT, Search, Utility. Can be linked together to help with large area searches.

29967521 FR Rescue sling

58.00



Firefighters Drag / Search Sling

Handles with Rubberized Grips

Designed to aid Firefighters and RIT Team personnel. Stored in an included pouch that will attach to SCBA waist straps or will store in Turnout Gear pockets. The sling is comprised of heavy duty 1" tubular webbing, forged steel D-Ring, non-locking aluminum carabiners, and custom handles with rubberized grips and reflective tape. Overall Length of Red Rescue Sling: 70".



Stows in Included Pouch

2369104

31.00



Corona™ Fire Resistant Truck / Escape Belt

Made to meet NFPA Class I Ladder / Escape Belt standards. Belt is easily secured around waist using unique double locking snap hook and 'D' Ring adjuster. Can be used as an equipment belt for carrying axes or forcible entry tools. Two light weight D-rings slide along belt to secure escape rope system. Retro-reflective striping. Strength: 6,000 lbs. Weight: 12 oz. Fits Waist size 34" - 56".

701132 Fire Resistant w/ Scotchlite® 112.00

Meets structural test requirements of Life Safety Escape Bel Standard. Meets ANSI/OSHA Class I Belt design requirements.



Corona™ Truck / Escape Belt

Made to meet NFPA Class I Ladder / Escape Belt standards, this Nylon Escape Belt is the perfect economical substitution for our Kevlar Belt. Belt is easily secured around waist using unique double locking snap hook and 'D' Ring adjuster. Can be used as an equipment belt for carrying axes or forcible entry tools. Two light weight D-rings slide along belt to secure escape rope system. Retro-reflective striping on Gold unit. Strength: 6,000 lbs. Weight: 12 oz. Fits Waist size 34" - 56".

701032	Gold w/ Scotchlite®	75.00
701031	Black	70.00

Meets structural test requirements of Life Safety Escape Bel Standard. Meets ANSI/OSHA Class I Belt design requirements.



Turnout Escape Harness

Designed to be kept with your turnout gear, this harness may be worn on the outside or between the barrier layer and shell layer. Special Clik Lok buckle and attachment strap allows this harness to be easily donned. Waist buckle requires both triggers to be depressed before disengagement. Extended "D" ring rigging point eases attachment. Standard fits waist size 28" - 44". XL fits waist size: 38" - 54". Sizing should be determined by waist measurement while wearing turnout pants.



7021131	Nylon, Std	85.00
7021151	Nylon, XLarge	85.00
7021231	Fire Resistant, Std	140.00
7021251	Fire Resistant, XLarge	140.00



Corona™ Truck / Escape Belt with Ladder Hook

Our popular Fire Resistant Corona Escape Belt with integral Ladder Hook. Manufactured of Kevlar® Brand fibers from Dupont and forged hardware. Retro-reflective striping. One-Size-Fits Most. Ladder Hook manufactured from high strength, alloy aluminum. Perfect for use in ladders and platforms. Belt Strength: 6,000 lbs. Hook Strength: 5,000 lbs.

701132H Fire Resistant w/ Ladder Hook 180.00

Meets structural test requirements of Life Safety Escape Bel Standard. Meets ANSI/OSHA Class I Belt design requirements.





Survival Belt™ II

A multi-purpose belt for emergency rappels, belays, restraint straps, anchor slings, tourniquets, etc., that can be worn as a uniform belt. With carabiner attached to the forged buckle, the belt allows the user to "get out quick". New design uses high strength Adjustable Rigging Buckle. Hook and Loop neatly secures spare length. Manufactured with 1 3/4" heavy duty webbing. Tensile Strength: 6,000 lbf. Color: Black. Weight: 8 oz.

Waist

		Waist	
703521	Small	25" - 36"	24.00
703531	Medium	32" - 42"	24.00
703541	Large	36" - 48"	24.00
703551	XLarge	40" - 55"	25.00

Meets NFPA 1983 requirements for Class I Harness.

Meets ANSI/OSHA Class I Belt design requirements. NFPA Rating: Escape belt.

Uniform Emergency Belt

Quick Adjust Buckle

A modified version of our Survival Belt™. Lightweight forged "V" ring is used for carabiner attachment point and is held securely by a velcro loop. Forged Steel Adjuster Buckle insures security without slipping. Extra webbing secured with hook and loop fastener. Tensile Strength: 5,000 lbf. Color: Black or Red. Weight: 8 oz.

	BLACK	Waist		RED	Waist	
703306	Standard	28" - 40"	31.00	7033164	Standard	28" - 40"
703308	Large	40" - 55"	31.00	7033184	Large	40" - 55"

Meets NFPA 1983 requirements for Class I Harness.

Meets ANSI/OSHA Class I Belt design requirements. NFPA Rating: Escape Belt.

Fire-Resistant Truck / Escape Belt

Unique fire resistant "belt" to meet NFPA Class I Ladder / Escape Belt standards. Belt is easily secured around waist using unique double locking snap hook and 'D' Ring adjuster. Can be used as an equipment belt for carrying axes or forcible entry tools. Two light weight D-rings slide along belt to secure escape rope system. Color: Black. Weight: 12 oz. Standard fits waist size 34" - 56". XL fits waist size: 44" - 68".

701131	Standard	130.00
701131XL	XLarge	142.00



Meets structural test requirements of Life Safety Escape Belt Standard.

Meets ANSI/OSHA Class I Belt design requirements.



Ladderman's Class II Harness Fire Resistant, Convertible Belt / Harness

A new concept in Ladder Harnesses. Fire resistant Kevlar® webbing provides extra security in high temperature and abrasive environments. Double locking, quick-attach snap at waist allows harness to be easily donned while in turnout gear. Leg straps are conveniently stowed in Nomex pouches until needed and can be donned by simply connecting quick attach snaps. When combined with our Rigger Ladder Hook Extension, the Ladderman's Harness is the perfect combination for safety on ladders and towers. Includes mesh storage bag. Proof Load: 5,000 lbs. Design Load: 600 lbs. Weight: 40 oz.

701230	Ladderman's Harness	275.00
--------	---------------------	--------

Meets structural test requirements of Life Safety Harness Standard. Meets ANSI/OSHA requirements.



Truckman's Tool Holster

Fits Most Harnesses

New design tool / axe holster for rescue harnesses. Fits onto any webbing up to 1.75 inches with heavy duty hook and loop fastener system. Adjustable webbing strap holds tool in place. Fits axes, Halligan tool, etc.

609150	Tool Holster	28.00
--------	--------------	-------

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



RescueTECH VANGUARD™ Rescue Technician Harness

A new harness for Rope Rescue Technicians. TUV Certified to NFPA 1983. Designed for function and comfort. Easy donning aided by 2-piece color coded leg and waist buckles. Special breathable padding keeps rescuers comfortable during exertion. Forged D rings at the front waist and chest provide rescuer main and belay attachments. Forged dorsal 'D' ring for fall protection and belay attachments. Lifting rings on shoulders allow vertical lifting with the RescueTECH Heavy Rescue Lifting Bridle. Canted side 'D' rings provide attachment point for positioning lanyards. Over the shoulder donning of the chest/shoulder section. Shoulder section attached to seat section with Delta Link.

711202	Small	285.00
711302	Medium/Large	285.00
711502	XLarge	285.00

Size	Height	Waist
S	5'2"-6'	27-35"
M/L	5'2"-6'	31-39"
XL	5'9"-6'8"	35-51"

Meets NFPA, OSHA, ANSI and CE requirements.



OBSERVER NFPA Class III Rope Access Harness

Our newest rope access harness. TUV Certified to NFPA 1983. We have partnered with premier harness manufacturer Singing Rock to supply Rope Access Technicians with a Lightweight, yet durable, multi-use harness. 2-piece leg buckles facilitate donning of this harness. Rigging rings at the front waist and chest as well as a dorsal D ring fulfills the main attachment point requirements for rope access. Side positioning D rings allow lanyards to be used to hold the user to the structure. Lightweight, breathable padding on the waist, legs, and shoulders make this harness's comfort unsurpassed.

23890803	Medium/Large	235.00
23890804	XLarge	235.00

Meets NFPA, OSHA, ANSI and CE requirements.

Size	Height	Waist
M/L	5'2"-6'	31-39"
XL	5'9"-6'8"	35-51"



OBSERVER-T™ Rope Access Tower Harness Includes Chest Ascender

An updated version of our Observer Harness that includes a chest ascender for vertical rope access use.

239818031	Med/Large	324.00
239818041	XLarge	324.00

Certified to NFPA 1983/2001 ed. standards. Meets ANSI/OSHA full body harness standards



TECHNote™ Quick Attach Leg Buckles



Many RescueTECH harnesses come with Quick-Attach Adjuster Buckles. These buckles allow the user to don a harness without stepping through a leg loop. With the Quick-Attach buckles, the user simply wraps the loop around their leg, attaches the buckles together, and tightens the webbing. These buckles provide an easy way to put a harness onto a victim.





UL

Voyager Rescue Harness

Light weight design provides ease of use. Features quick adjust legs and waist. 5" waist pad for extra comfort. Chest harness attaches to waist with a high strength stainless steel rapid link for corrosion resistance. Quick-adjust leg buckles.

718326	Small	325.00
718336	Medium	325.00
718346	Large	325.00
718356	XLarge	325.00

UL Certified to NFPA 1983 Class III Harness. Meets ANSI/OSHA Class III Full Body Harness requirements.

Size	Height	Waist
SM	5'4" - 6'0"	28" - 33"
STD	5'5" - 6'4"	32" - 36"
LG	5'5" - 6'4"	35" - 39"
XL	5'5" - 7'0"	39" - 50"



UL

Technical Rescue Harness

Attachment points on chest, waist (front and back), back, and shoulders make this one of the most versatile harness for rescue. Made of highest quality nylon webbing and custom designed 5" waist comfort pads. Waist utilizes special double locking quick connect snap and Locking V ring adjuster for a side-entry design. Leg section utilizes color coded quick-connect two piece buckles. Color: Blue w/ Black pads. Weight: 94 oz.

716126	Small	320.00
716136	Medium	320.00
716146	Large	320.00
716156	XLarge	320.00

UL Certified to NFPA 1983 Class III Harness. Meets ANSI/OSHA Class III Full Body Harness requirements.

Size	Height	Waist
SM	5'5" - 5'9"	26" - 31"
MD	5'5" - 6'4"	30" - 36"
LG	5'5" - 6'4"	35" - 40"
XL	5'5" - 7'0"	38" - 48"



UL

Heavy Rescue Harness


Combines Fall Protection and Rescue

The Heavy Rescue Harness has four "D" rings - one on the seat harness, one on each shoulder and one "Dorsal 'D' Ring" in the back positioned between the shoulder blades allowing a near vertical lift when wearing an air pack. Special two-piece quick connect leg buckles aid in donning the Heavy Rescue Harness. Waist connects with fast-connect 2 piece safety buckle. Includes padded shoulder straps and mesh storage bag. Weight: 80 oz.

705310	XSmall	205.00
705330	Standard	205.00
705350	XLarge	205.00

UL Certified to NFPA 1983 Class III Harness. Meets ANSI/OSHA Class III Full Body Harness requirements.

Size	Height	Waist
XS	5'5" - 5'9"	24" - 36"
STD	5'5" - 6'4"	26" - 54"
XL	5'5" - 7'0"	34" - 64"

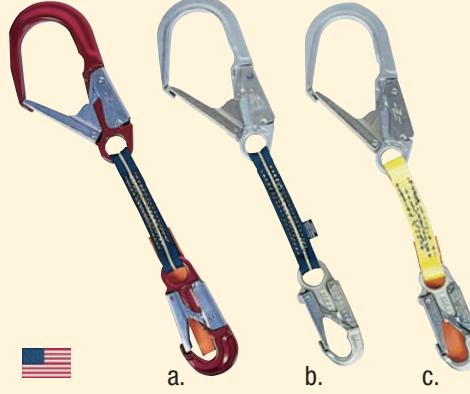

RescueTECH™ Lifting Bridle

Double Locking Snaps

Unit attaches to shoulder lifting rings with industrial double locking snaps. Overall Height: 23". Strap Length: 11" Width: 16". Weight: 32 oz. Strength: 6,000 lbf.

609025	62.00
---------------	-------



Wristlet

Ergonomic Comfort Pads

Wrist harness for emergency use and for work locations where a full body harness might create a greater risk. Also excellent for situations requiring special positioning of the victim's arms in conjunction with a full body harness. Manufactured from nylon webbing. Special elastic tensioner helps keep unit secure when used as anklet. Comes complete with 2 wristlets and lifting yoke. Weight: 10.5 oz.

609200	Wristlet	25.00
---------------	----------	-------

Meets OSHA requirements.





NAVAHO® BOD Multi-purpose harness

Excellent balance between comfort when hanging and freedom of movement. Sternal and dorsal attachment points can be used to connect a fall-arrest system and help ensure that the user is suspended in the correct position after a fall. One ventral and two lateral attachment points for multiple hands-free work positioning configurations. Leg loops equipped with DoubleBack or FAST buckles.

235471001 Navaho, S/M 345.00

235471002 Navaho, L/XL 345.00

235471011 Navaho Fast, S/M 365.00

235471012 Navaho Fast, L/XL 365.00

UL Certified to NFPA 1983 Class III Harness. Meets ANSI/OSHA Class III Full Body Harness requirements.

Size	Height	Waist
STD	5'3"- 5'11"	28"- 47"
XL	5'8"- 6'6"	32"- 55"



Voyager Riggers

Low-visibility version of popular Voyager Rescue without shoulder D rings. Features quick adjust legs and waist. 5" waist pad for extra comfort. Chest harness attaches to waist with a high strength stainless steel rapid link for corrosion resistance. Specify Size.

718321	Small, Black	335.00
718331	Medium, Black	335.00
718341	Large, Black	335.00
718351	XLarge, Black	335.00



OBSERVER-R™ Riggers Full Body Harness

Certified to NFPA 1983

The Observer-R is designed padded waist belt and leg-loops for superior comfort. Quick-adjust buckles on waist belt, leg-loops and shoulder straps ease donning and doffing the harness. Descender attachment point, rear fall arrest attachment point, and positioning belt with two attachment elements conforms with international requirements*. Two gear loops

238908031 Medium/Large 235.00

238908041 XLarge 235.00

* Descender EN813, Rear Fall Arrest EN361, Side positioning Rings EN368.

Size	Height	Waist
M/L	5'2"- 6'	31"- 39"
XL	5'9"- 6'8"	35"- 51"



Size	Height	Waist
SM	5'0"- 5'11"	28"- 33"
MD	5'5"- 6'4"	31"- 36"
LG	5'5"- 6'4"	35"- 40"
XL	5'5"- 7'0"	39"- 46"



Basic Rope Access Harness

A tuned down version of the Professional Tower Rope Access harness. Waist belt portion of the harness uses smaller sized D-rings to save weight and reduce bulk. New StabLock quick release adjustable buckles on legs. Attachment points at waist, hips (positioning), chest (positioning), back (lumbar) and back (fall arrest). Chest harness designed to incorporate a chest ascender (not included) for rope access work. Weight 5 lb. 6 oz.



Rigger's Full Body Harness

Adjuster buckles on both sides of the harness keep the waist pad and "D" rings centered on the user. Great for instructors. Special Loop at chest for ladder climbing and self-rescue. Side positioning rings let user lean back in comfort. 5" padded waist and 3" padded legs. Includes mesh storage bag. Color: Black. Weight: 106 oz.

712201 Small 305.00

712301 Medium 305.00

712401 Large 305.00

712501 XLarge 305.00

Meets ANSI/OSHA Class III Full Body Harness construction requirements.

Designed to meet the demands of the transmission line worker, structural access and the rope access professionals. Chest harness designed to incorporate a chest ascender (not included). Attachment points at waist, hips (positioning), chest (positioning), back (lumbar) and back (fall arrest). Extra large, side positioning rings (lineman style). Weight 6 lb. 11 oz.

204239012 Small 385.00

204239013 Medium 385.00

204239014 Large 385.00


204239015 XLarge 385.00

Certified to NFPA 1983 standard. Certified to ANSI/OSHA and CAN/CSA full body harness standards

204238712 Small	345.00
204238713 Medium	345.00
204238714 Large	345.00
204238715 XLarge	345.00

Certified to NFPA 1983 standards. Certified to ANSI/OSHA and CAN/CSA full body harness standards



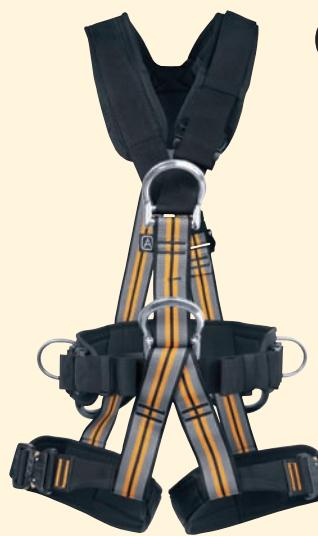

OPERATOR

Work / Access Harness

Fast-Connect Cobra buckles allow easy and quick manipulation when putting the harness on. Anatomically shaped waist and leg pads provide comfort when hanging in the harness. Lightweight, excellent functionality, quick and easy adjustment makes your work safe and efficient. Size: S, M/L, XL CE 0123 • EN 358 • EN 361 • EN 813

2389052220	Small	365.00
2389052230	Medium/Large	365.00
2389052250	XLarge	365.00

Size	Height	Waist
M/L	5'2"-6'	31-39"
XL	5'9"-6'8"	35-51"

CE



BODY™

Fall Protection Harness

Fully adjustable fall arrest harness with two attachment points in conformity with ANSI and EN 361. Works well as a victim rescue harness. CE certified.

238903220	Small	86.00
238903230	Medium/Large	86.00
238903250	XLarge	86.00

Meets all ANSI, OSHA standards and CSA construction requirements for Class III Harness.

CE



Rope Dancer™

Fall Protection Harness

Easy to don and easy to operate double buckles. Front and rear belay/rappel front attachment points. Reinforced tie-in loop. Full body harness designed specially for rope course.

23890502	Small	117.50
23890503	Medium/Large	117.50
23890505	XLarge	117.50

Meets all ANSI, OSHA standards and CSA construction requirements for Class III Harness.

CE



CE

Rigger's BODY™

Fall Protection Harness

Fully adjustable fall arrest harness with two attachment points in conformity with ANSI and EN 361. Works well as a victim rescue harness. CE certified.

238903421	Small	86.00
238903431	Medium/Large	86.00
238903451	XLarge	86.00

Meets all ANSI, OSHA standards and CSA construction requirements for Class III Harness.



Industrial 1 'D' Full Body Harness

"D" Ring Between the Shoulders

Manufactured from color coded 1 3/4" polyester webbing for ease of donning. Forged steel hardware with quick-connect friction buckles for quick secure adjustments. One sliding "D" between the shoulder blades in back for attachment of lanyards, etc. Sized to fit over clothing. Positioning version has two rings at waist level. Weight: 32 oz.

702132	Small/Large	76.00
702142	Large/XLarge	76.00

702132P	Positioning Rings, Small/Large	86.00
702142P	Positioning Rings, Large/XLarge	86.00

Meets all ANSI, OSHA standards and CSA construction requirements for Class III Harness.



Industrial 3 'D' Full Body Harness

"D" Rings for Lifting / Fall Protection

Manufactured from color coded 1 3/4" polyester webbing for ease of donning. Forged steel hardware with quick-connect friction buckles for quick secure adjustments. One sliding "D" between the shoulder blades in back for attachment of lanyard and two shoulder lifting rings. Sized to fit over clothing. Positioning version has two rings at waist level. Weight: 38 oz.

702332	Small/Large	91.35
702342	Large/XLarge	91.35
702332P	Positioning, Small/Large	115.00
702342P	Positioning, Large/XLarge	115.00

Meets all ANSI, OSHA standards and CSA construction requirements for Class III Harness.





CE

Worker™ Padded Seat Harness

Our newest Class II seat harness will impress you with its versatility and comfort. Special "breathable" laminated foam padding provides comfort not often found in basic seat harnesses. Special locking buckles allow you to don without having to "step-through" the harness. Primary rigging "D" ring floats along the waist strap to better balance the forces placed on the rescue - giving greater comfort. Side "D" rings allow for placement of positioning slings.

2389133	Medium/Large	100.00
2389135	XLarge	100.00

Exceeds ASTM/ANSI/OSHA requirements for Seat Harness.



UL

NFPA Padded Seat Harness

5" Waist Pad with Gear Loops

Same construction and specification as the NFPA Harness (right) but with special "floating" pads on the waist and legs. 4" waist pad slides to allow adjustment for multiple sizes. Gear loops on waist pad for attachment of additional equipment. 3" leg pads for superior comfort. 5" waist pad is made from custom-designed laminated foam. Exterior of pad is tough Cordura Nylon. Interior of pad is a special wicking material to pull sweat away from the rescuer's body. Includes mesh storage bag. Weight: 48 oz.

		Waist	Gear Loops	
714201	Small	25" - 32"	2	173.00
714301	Medium	30" - 50"	4	173.00
714401	Large	36" - 54"	4	173.00

UL Certified to NFPA 1983 Class II Harness. Meets ANSI/OSHA requirements..



UL

NFPA Seat Harness

Comfortable / Non-Padded

Heavy duty 2" waist (Strength: 6,000 lbf.) is completely adjustable for all waist sizes 25 through 50 inches. Quick-adjust waist buckle for security and quick-adjust over-width leg loops provide comfort and adjustability. Forged "D" ring attachment point has a proof load of 5,000 lbf. and has been tested to 8,000 lbf. Equipment loops for carrying additional gear. Contrasting stitching for visual inspection of thread wear. Gear loop provides convenient place to hang tools. Includes mesh storage bag. Tensile Strength: 6,000 lbf. Weight: 32 oz.

704401	Fits Waist 25" - 50"	115.00
--------	----------------------	--------

UL Certified to NFPA 1983 Class II Harness. Meets ANSI/OSHA requirements.



CE

Worker™ Chest Harness

Fully adjustable chest harness supplied with connecting carabiner. When used in combination with the Worker Padded Seat Harness, the Worker Chest harness creates a fully adjustable full body harness in conformity with EN 361 - Great for Work Access Use. Quick-Adjust buckles on shoulder straps. Do not use separately!

23891213	Worker Chest Harness	74.95
----------	----------------------	-------

WARNING:
Shoulder straps are not for vertical lifting!



CE

TIMBER™

Full Function Seat Harness

Adjustable sliding D-ring enables you to take safe, comfortable and effective work position. Wide padding provides superior comfort. Side D-rings for work positioning or gear attachment. 4 gear loops

238900123	Med/Large	250.00
238900125	XLarge	250.00



CE

Franklin

Work Positioning Seat

The Franklin Work Positioning Seat provides more comfort when hanging in the harness and is intended for use with our fall arrest or work positioning harnesses. Easy to adjust buckles. Wide sitting area gives good stability and comfortable hanging as well as standing work position. Suspension straps do not press on your thighs. Three D-rings (bearing capacity 110 lbs.) for gear. Max. load of seat: 500 lbs. Weight: 3.6 lbs.

23898110	Franklin	165.00
----------	----------	--------





Adjustable Seat Harness

A medium duty version of the NFPA Harness. Manufactured of sturdy 2" webbing and forged hardware. Double pass waist buckle provides non-slipping adjustment. Quick-adjust leg loops allow the rescuer to don this harness with ease. Forged "D" ring provides a secure attachment point for carabiners. Equipment loops for attaching extra hardware. Used in all types of rappelling and rescue situations. 2 gear loops. Weight: 27 oz. Color: Black.

		Waist	
710231	Medium	28 - 33"	70.00
710241	Large	34 - 40"	70.00
710251	Extra-Large	40 - 46"	70.00

Exceeds ASTM/ANSI/OSHA requirements for Seat Harness.



Adjustable TAC Harness

Soft Connect Tactical Version

The TAC Harness is a version of our Adjustable Seat Harness with a modified rigging point. Many tactical teams requested a soft-connect version to reduce the metal-on-metal noise produced when a carabiner is attached to a 'D' ring. Quick-adjust leg loops allow the rescuer to don this harness with ease. Forged "D" ring provides a secure attachment point for carabiners. Equipment loops for attaching extra hardware. Used in all types of rappelling and rescue situations. 2 gear loops.

		Waist	
710331	Medium	28 - 33"	65.00
710341	Large	34 - 40"	65.00
710351	Extra-Large	40 - 46"	65.00



Ladder / Victim Harness

Quick-Connect Buckles

An innovative dual purpose harness, built to NFPA standards. Constructed of 1 3/4" high strength webbing, the Ladder/Victim Harness utilizes special forged color-coded quick-connect friction buckles on legs to aid in proper donning. Leg straps are stored in attached pouch to easily store and transport this harness. Special waist buckle pad insures user comfort. Color: Orange w/ contrasting leg straps. Weight: 32 oz.

708360	Ladder / Victim Harness	140.00
--------	-------------------------	--------

Exceeds NFPA 1983 requirements for Class II Harness.



Victim Chest Sling

Attaches to Ladder / Victim Harness, turning the system into a Class III Victim Harness. Wide, padded chest strap supports victim's upper torso during vertical lifts. Quickly attaches around victim's chest. Connects with Double Locking Snap. Padded for comfort. Adjustable Chest and seat connector straps.

723201	Victim Chest Sling	68.00
--------	--------------------	-------



Standard Chest Harness

General Purpose Chest Harness

A basic style chest harness with "V" ring attachment points that can be connected with a carabiner or rope. The Standard Chest Harness features 2" chest strap webbing and 2" shoulder strap webbing. Fully adjustable. One Size Fits Most. Color: Black. Weight: 12.5 oz.

723321	Standard Chest Harness	43.00
--------	------------------------	-------

*Exceeds NFPA construction requirements.
Meets ANSI Class II Harness construction requirements.*



Tactical Rappel Harness

w/ 'D' Ring

Quick Fit Waist Buckle

The Tactical Rappel Harness w/ "D" Ring is a unique configuration intended for Tactical Operations. Can be worn as a belt then converted to a seat harness by simply pulling the leg portion from the waist pouch. Auto-Locking snap secures waist and forged 2-piece friction buckles secure leg loops. Optional 4" waist pad designed to accept ALICE clips. Color: Black

727321	Tactical Harness w/ D Ring	135.00
--------	----------------------------	--------

Meets NFPA/ASTM/ANSI/OSHA requirements for Seat Harness.

WARNING:
Shoulder straps are not for vertical lifting!





Deluxe Victim Rescue Cradle

Full Upper Body coverage with padded back panel for greater patient comfort and security. 7 strap support for superior strength. Forged D Tag line anchor helps rescuers control patient in vertical environment. Victim Arm Keepers maintain control of upper extremities. 4 Grab handles aid in maneuvering victim before, during, and after the vertical lift. Manufactured of 1000 den fabric with Cordura brand fibers, high strength webbing and forged steel hardware. (Manikin, Carabiner, and Tether not included.)

708353 Rescue Cradle* 190.00


**Does not replace proper patient packaging using backboard, cervical collar, and head blocks.*



Laika Dog Harness

Intended for transport of the dog from a helicopter or other high angle environments. Universal size. Aluminum-alloy adjusters. Color: Orange. Capacity: 300 lbs.

23898115 Laika 135.00

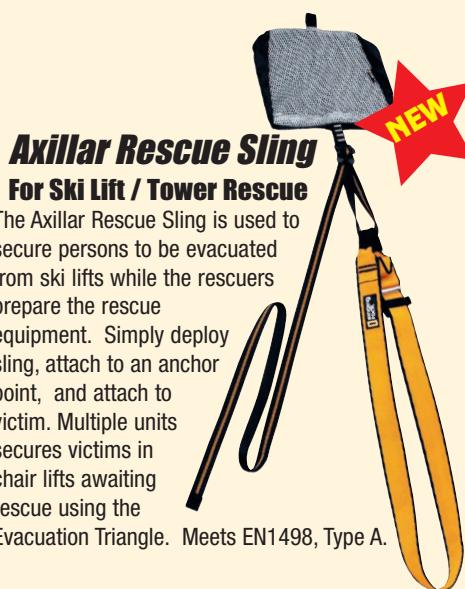

Axillary Rescue Sling

For Ski Lift / Tower Rescue

The Axillary Rescue Sling is used to secure persons to be evacuated from ski lifts while the rescuers prepare the rescue equipment. Simply deploy sling, attach to an anchor point, and attach to victim. Multiple units secures victims in chair lifts awaiting rescue using the Evacuation Triangle. Meets EN1498, Type A.

23898109 Axillar Rescue Sling 46.00



Evacuation Triangle with Shoulder Straps

A new design from our friends at Singing Rock. Complete with Shoulder Straps, this triangle offers multiple uses for victim evacuation. Versatile construction. Weight: 27 oz.

23898213 Evac Triangle w/ Straps* 105.00

GENERAL USE



RD70™ Rescue Carabiner

Rescue Tech's newest general use carabiner. Design to meet the tough-use conditions met by Rescue Technicians. Heat-treated alloy steel construction with Gold Chromate corrosion protection.

Strength	15,737 lbf.	70 kN
WLL	1574 lbs.	715 kg
Gate Opening	1.4"	35 mm
Dimensions	5.9 x 3.6	150 x 90 mm
Weight	12.5 oz.	360gm
NFPA Rating:	General Use	

60511820	Screwgate, Gold	20.00
60511821	Screwgate, Black	22.00

GENERAL USE



OD50™ Rescue Carabiner

A Great Multi-Use Carabiner

Heat-treated alloy steel construction with Gold Chromate corrosion protection. Made to meet the toughest rescue needs.

60511750	Screwgate, Gold	17.50	Strength	11,241 lbf.	50 kN
60511751	Screwgate, Black	18.50	WLL	1124 lbs.	511kg
60511730	Twistlock, Gold	22.00	Gate Opening	.8"	20 mm
60511731	Twistlock, Black	24.00	Dimensions	4.25 X 2.5"	112 x 64mm
60511760	Screwgate w/ bar	17.75	Weight	7.7 oz.	220 gm
60511740	Twistlock w/ bar	22.50	NFPA Rating:	General Use	



GENERAL USE



RescueTECH Big Dan

Designed to Prevent Cross-Loading

Combines all the ideal design ideas into one carabiner. The Big Dan's unique frame is design to prevent cross-loading the carabiner. Cross-loads are quickly realigned to the major axis. The curved back modified 'D' design optimizes the strength and handling characteristics. Available in Twistlock, Supersafe (3 stage) and Quadlock (4-Stage) safety mechanisms.



RescueTECH™

Wide Gate 'D'

Extra-Wide Gate Opening

Classic design with an extra-large gate opening.
NFPA Rating: General Use.



GENERAL USE



RescueTECH™ Large D Supersafe

3-Stage Autolock Rescue Carabiner

The newest version of our popular Large D Rescue Carabiner. Featuring the triple-locking Supersafe gate design.

Strength	16,187 lbf.	72 kN
WLL	1,618 lbs.	735 kg
Gate Opening	1.02"	25.5mm
Dimensions	4.96 x 2.8"	126 x 71mm
Weight	10.3 oz.	293 gm

6050184	Large D, Supersafe	32.50
---------	--------------------	-------

UL Certified NFPA 1983.
Meets ANSI/OSHA strength requirements.

Strength	11,241 lbf.	50 kN
WLL	1,124 lbs.	511 kg
Gate Opening	1.0"	25 mm
Dimensions	4.8 x 3.5"	123x90 mm
Weight	9.8 oz.	278 gm

6051179Q	Quadlock - 4 Stage	40.00
6051179S	Supersafe - 3 Stage	38.00
6051179T	Twistlock - 2 Stage	32.00

Meets NFPA 1983/ANSI/OSHA strength requirements.



RescueTECH™

Extra-Large Rescue 'D'

Extra Large 1.5" Gate Opening

A new design in rescue carabiners. Extra-large gate and interior dimensions let this carabiner's gate close over any round structure that will fit through the gate. 1/2" alloy steel plated with Gold Chromate. Gate locking design.

Strength	12,589 lbf.	56 kN
WLL	1,259 lbs.	572 kg
Gate Opening	1.5"	38 mm
Dimensions	5.98 x 3.66"	152 x 93 mm
Weight	12.8 oz.	363 gm

6050159 XL Rescue D 27.00



GENERAL USE

UL Certified NFPA 1983.
Meets ANSI/OSHA strength requirements.



GENERAL
USE



GENERAL
USE



RescueTECH™ Offset 'D'

High Strength / Lightweight

The best of American-made carabiners. High strength, heat treated 7/16" diameter alloy steel, and large gate opening, make this the ideal carabiner for rescue. Plated with gold or black chromate to increase resistance to corrosion. Gate locking design of the locking collar helps prevent accidental over-locking of gate after load is applied. Screwgate with internal threads to eliminate rope wear. Each carabiner is marked with strength and manufacturing batch number.

Strength	11,915 lbf.	53 kN
WLL	1,192 lbs.	542 kg
Gate Opening	.944"	24 mm
Dimensions	4.37 x 2.75"	111x70 mm
Weight	7.4 oz.	210 gm

6050170 Offset 'D' Locking (Gold) 18.75

6050171 Offset 'D' Locking (Black) 19.75

Meets NFPA 1983/ANSI/OSHA strength requirements.

RescueTECH™ Offset 'D' Autolocking

The first U.S. made autolocking carabiner. Using the traditional 7/16" Offset Carabiner Frame, the Autolock utilizes a locking collar with a unique autolocking design. Plated with gold or black chromate to increase resistance to corrosion. Each carabiner is marked with manufacturers part number, strength, and manufacturing batch number.

Strength	11,915 lbf.	53 kN
WLL	1,192 lbs.	542 kg
Gate Opening	.944	24 mm
Dimensions	4.37 x 2.75"	111 x 70mm
Weight	7.4 oz.	220 gm

6050173	Autolock (Gold)	24.75
6050174	Autolock (Black)	27.75
6050176	Autolock, Captive Eye	27.75
6050177	3-Stage Autolock	29.50

Meets NFPA 1983/ANSI/OSHA strength requirements.



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.

GENERAL
USE



RescueTECH™ Large 'D' Screwgate

The Basic Tool of Rescue

Traditional design facilitates use in all rescue systems. Gold or Black Chromate plating over 1/2" alloy steel distinguishes this American-made carabiner. Gate locking design prevents locking collar from jamming as a result of being tightened after load is applied.

Strength	16,187 lbf.	72 kN
WLL	1,618 lbs.	735 kg
Gate Opening	1.02"	25.5mm
Dimensions	4.96 x 2.8"	126 x 71mm
Weight	10.3 oz.	293 gm

6050182 Gold 21.70
6050183 Black 22.75

UL Certified NFPA 1983.
Meets ANSI/OSHA strength requirements.



LIGHT
USE

Stainless Steel Offset 'D'

Proof Tested


Stainless Steel provides excellent corrosion resistance. Rating: Light Use.

Strength	7,870 lbf.	35 kN
WLL	787 lbs.	358 kg
Dimensions	4.5" x 2.5"	118 x 64mm
Gate Opening	.8"	20mm
Weight	7.9 oz.	225 g

6053120 Twistlock 47.00
6053121 Supersafe 51.00

Meets NFPA/ANSI/OSHA strength requirements.



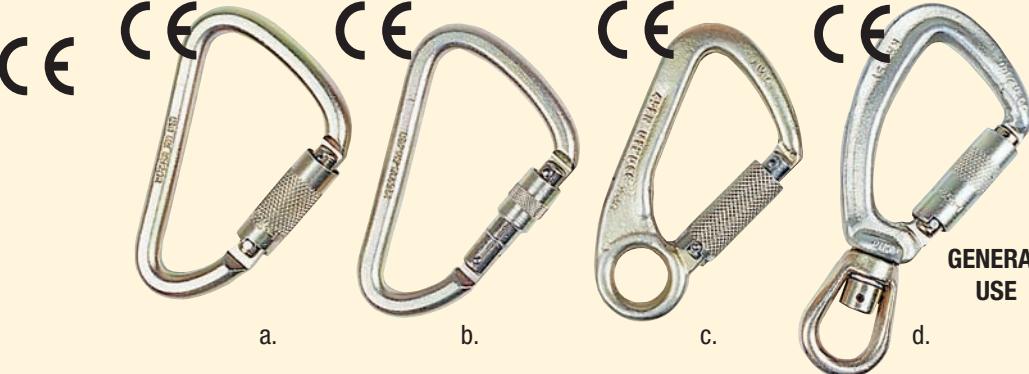

Iron Wizard Ladder Hook

Mid-Sized Rescue Ladder Hook

New Ladder Hook for use where space is limited. Ideal for use in confined spaces to reduce overhead length of rigging systems. Dimensions: 6.8" x 3.8" Strength: 70 KN. Rating: NFPA General Use.

6051186 Iron Wizard 43.50

Steel Carabiners and Autolocking Snap Hooks

Stock Number	Description	Dimension (in.)	Gate (in.)	Strength (lbf.)	WLL** (lbs.)	Wgt (oz.)
a. 6053170	Klettersteig, Twistlock	5.0 x 3.0	1.0	10,000	1,000	9
b. 6053172	Klettersteig, Screwgate	5.0 x 3.0	1.0	10,000	1,000	9
6053171	Klettersteig, Supersafe	5.0 x 3.0	1.0	10,000	1,000	9
c 6053198	Fixed Eye Steel, Twistlock	5.25 x 2.75	0.75	10,000	1000	9.8
6053197	Fixed Eye Steel, Supersafe	5.25 x 2.75	0.75	10,000	1000	10.1
d 6053193	Swivel Eye Steel, Twistlock	7.0 x 3.5	1.0	10,000	1000	15.3
6053194	Swivel Eye Steel, Supersafe	7.0 x 3.5	1.0	10,000	1000	16.6
						55.00

Meets OSHA, NFPA, CSA, BSI, DIN requirements.

**WLL - Recommended Working Load (also known as Safe Working Load) is calculated using the Industrial 10:1 critical use Safe Working Load Ratio.



Snaps are to be used in accordance with current ANSI / OSHA Fall Protection Standards.

TECHNote™

TWISTLOCK vs. SUPERSAFE™

Twistlock gates are the fastest gate locking mechanism to operate. It provides a convenient solution to eliminating the chance that the gate will accidentally be left unlocked.

Supersafe gates are triple-action twistlock construction that requires three distinct movements to unlock the carabiner gate.

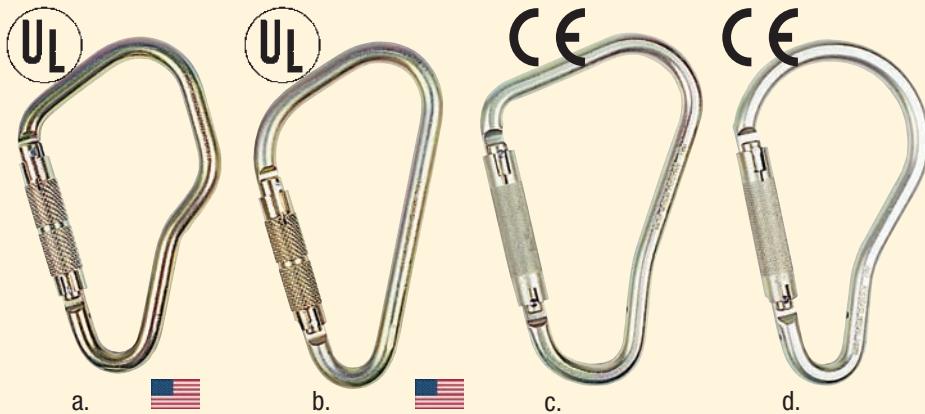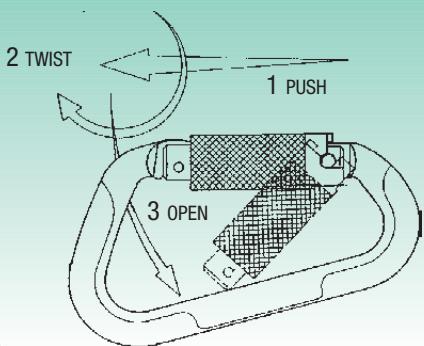

Scaffold hooks


Stock Number	Description	Dimension (in.)	Gate (in.)	Strength (lbf.)	WLL** (lbs.)	Wgt (oz.)
a. 6050180	Offset Scaffold Hook, Autolock*	7.9 x 4.6	2.1	11,200	1,120	669
b. 6050186	Ladder Hook, Autolock*	8.07 x 4.95	2.2	11,200	1,120	680
6050188	Ladder Hook, Screwgate*	8.07 x 4.95	2.4	11,200	1,120	680
c. 6053180	Offset Scaffold Hook, Twistlock	8.3 x 5.6	2.3	10,000	1,000	740
d. 6053184	Pear Scaffold Hook, Twistlock	8.8 x 4.7	2.1	7,800	780	744
						49.00

*Meets NFPA 1983. 3rd party certified by Underwriters Laboratories.
Exceeds ANSI/OSHA strength requirements.

Captive Bar included with Scaffold Hooks is easily user-inserted into frame



WARNING
Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.

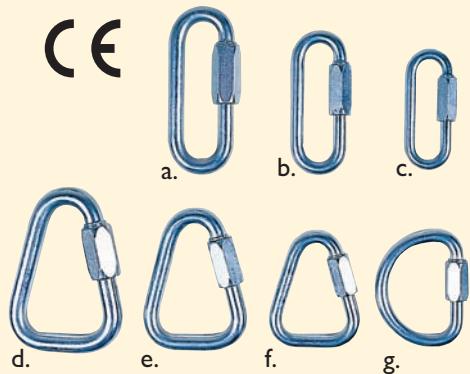

M.R. Links

These links are often an inexpensive alternative to standard carabiners. They are most effective in applications for semi-permanent attachments. The Delta shape link is used where multi-directional loading is encountered. All the links are complete with a long threaded nut closure. Made in France.



Offset D Aluminum with Captive Eye

Pin holds Search Lines in Place

Same shape and closure as our Offset D Autolock Carabiner. The additional of the pin helps keep ropes and cords situation at the base of the carabiner. No longer can your search line come off the carabiner by simply sliding out the gate opening.

GALVANIZED		Dimensions (in)	Gate (in)	Strength (lbf.)	WLL (lbs.)	Rating
a. 60510112	12mm Widegate	4.875 x 4	15/16	13,780	1378	General 9.00
b. 60510110	10mm Widegate	4.125 x 1.75	13/16	11,020	1100	General 5.95
c. 60510108	8mm Widegate	3.5 x 1.5	11/16	7,165	700	Light 4.35
d. 60510214	14mm Delta	4.75 x 3.375	5/8	19,840	1984	General 13.75
e. 60510212	12mm Delta	4.125 x 3	19/32	12,125	1213	General 9.50
f. 60510210	10mm Delta	3.5 x 2.625	7/16	9,920	990	General 6.10
g. 60510310	10mm Semi-Circle	3.5 x 3	5/16	9,920	990	General 8.00

STAINLESS STEEL		Dimensions (in)	Gate (in)	Strength (lbf.)	WLL (lbs.)	Rating
e. 60511212	12mm Delta	4.125 x 3	19/32	19,290	1920	General 29.25

Exceeds NFPA 1983/ANSI/OSHA strength requirements.



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.

6051273 Autolock w/ Captive Eye 23.00

Meets NFPA 1983/ANSI/OSHA strength requirements.

Rigging Swivels

Bearings Provide a Low Friction Rigging Tool

A handy tool for use where ropes or rigging must be free to rotate. Great for use in confined space rescues. Stainless Steel is stronger and more durable than comparable sized aluminum swivels.

		Length (in)	Strength (lbf.)	WLL (lbs.)	Opening Diam.	Wgt (oz.)	
a. 606468**	Stainless Steel	4.5	10,000	1,000	3/4"	9.1	100.00
b. 606501**	CMI Axis™ Swivel	4.25	9,000	900	1.25"	5.5	71.00
c. 2354159*	Petzl Aluminum, Large	4.25	8,093	800	3/4"	5.2	69.95
d. 2354158	Petzl Aluminum, Small	3.75	5,000	500	1/2"	4.5	59.95

*Certified NFPA 1983-G

**Meets NFPA 1983 Strength Specifications




Quick Release Snap

Quick release under tension. Used where a line might have to be separated quickly from anchor during helicopter lifts, etc. NOT designed for continuous heavy duty use. Full size stainless steel construction.

	Bail Length	Strength Diameter	WLL (lbf.)	NFPA (lbs.)	Rating	
606302	Heavy Duty	4 5/16"	5/8"	10,500	1,050	General 130.00



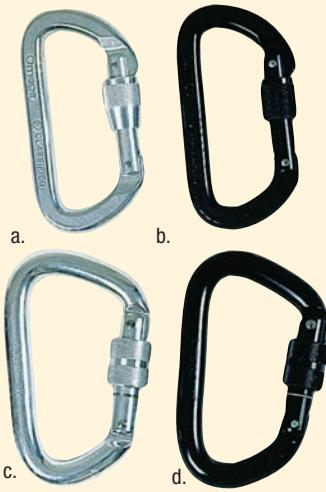

NFPA Aluminum Carabiners

LIGHT
USE

Rescue Technology aluminum carabiners are designed with quality and utility in mind. Manufactured from high quality alloy aluminum, the sides of the standard size are flattened to give superior performance. Each carabiner is marked with its original strength and manufacturing batch. Certified by Underwriters Laboratories to NFPA 1983.

Stock Number	Description	Color	Gate (in.)	Dimensions (in.)	Strength Major Axis	Strength Open	WLL (lbs.)
a. 6051250*	NFPA 'D' Screwgate	Silver	.625	4.1 x 2.1	6,070 lbf.	2020 lbf.	607
b. 6051251*	NFPA 'D' Screwgate	Black	.625	4.1 x 2.1	6,070 lbf.	2020 lbf.	607
c. 6050270	NFPA Offset 'D' Screwgate	Silver	.787	4.5 x 2.75	6,745 lbf	2020 lbf.	675
d. 6050271	NFPA Offset 'D' Screwgate	Black	.787	4.5 x 2.75	6,745 lbf	2020 lbf.	675
6050272	NFPA Offset 'D' Autolock	Silver	.787	4.5 x 2.75	6,745 lbf	2020 lbf.	675
6050278	NFPA Offset 'D' Locksafe	Silver	.787	4.5 x 2.75	6,745 lbf	2020 lbf.	675
							20.60

*UL Certified to NFPA 1983 requirements.




Aluminum Carabiners

LIGHT
USE

Larger versions of our NFPA Aluminum carabiners provide a larger gate opening. The Jake is a traditional HMS style carabiner for those who need a large, smooth radius at one end. The Large 'D' is an aluminum version of our popular steel Large 'D' carabiner.

Stock Number	Description	Color	Gate (in.)	Dimensions (in.)	Strength Major Axis	Strength Open	WLL (lbs.)
a. 6050279	Jake HMS Screwgate	Gray	1.0	4.6 x 3.15	5,171 lbf.	1800 lbf.	517
b. 6050274	Jake HMS Autolock	Gray	.94	4.6 x 3.15	5,171 lbf.	1800 lbf.	517
6050259	Jake HMS Locksafe	Gray	.86	4.6 x 3.15	5,171 lbf.	1800 lbf.	517
c. 6051280	Large 'D' Screwgate	Silver	1	4.8 x 2.8	6,745 lbf.	2250 lbf.	675
d. 6051281	Large 'D' Screwgate	Black	1	4.8 x 2.8	6,745 lbf.	2250 lbf.	675
							20.60

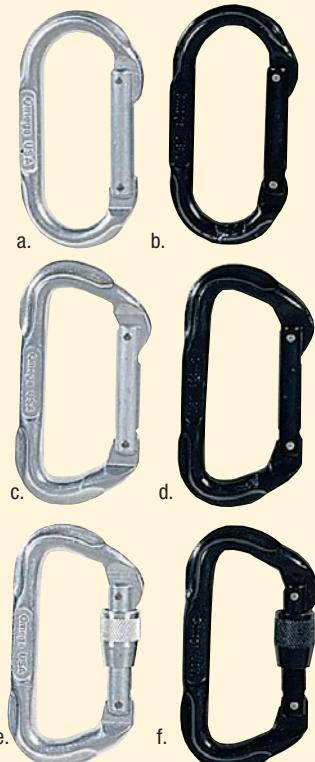

Stock Number	Description	Color	Gate (in.)	Dimensions (in.)	Strength Major Axis	Strength Open	WLL (lbs.)
a. 6050200	11mm Oval Non-Locking	Silver	.625	4.1 x 2.1	4,946 lbf.	1350 lbf	494
b. 6050201	11mm Oval Non-Locking	Black	.625	4.1 x 2.1	4,946 lbf.	1350 lbf	494
c. 6050210	'D' Non-Locking	Silver	.787	4.2 x 2.2	6,969 lbf.	2020 lbf.	697
d. 6050211	'D' Non-Locking	Black	.787	4.2 x 2.2	6,969 lbf.	2020 lbf	697
e. 6050250	'D' Locking	Silver	.67	4.2 x 2.2	6,969 lbf.	2020 lbf	697
f. 6050251	'D' Locking	Black	.67	4.2 x 2.2	6,969 lbf.	2020 lbf	697
							11.15

TECHNote™

UNITS OF MEASUREMENT

Pounds and kilograms are units of weight measurement (i.e. mass under the influence of gravity). Foot Pounds & kiloNewtons are the correct measurement of the force it takes to break an object. The conversion formula is pounds force(lbf.) = kiloNewtons (kN) divided by .004448.

TECHNote™

ANSI REGULATIONS

ANSI fall protection regulations state that "locking type snap hooks shall have a self-closing, self-locking keeper." This statement is normally interpreted as meaning only auto-locking carabiners (snap-hooks) meet the standard.



Mini-Haul - Light

A mini 4:1 / 5:1 Hauling system for those time where you don't need to deploy your long ropes and heavy pulleys. Perfect for litter attendants, edge transitions, and much more. Comprised of our 3/8" ACCESS Lifeline (30'), RescueTECH Double Mini Pulley (2), OD50 Carabiners (2), Prusik Cord, and pouch (will attach to harness). Tested Strength to Prusik failure: 5,500 lbf., Ultimate Strength: 7,000 lbf. Light Use

614405	Screwgate	225.00
614406	Autolock	235.00



Mini-Haul - General

A full-sized 4:1 / 5:1 Hauling System for all types of rescues. Perfect for load transfer, short haul distances, pre-rigs, and much more. Comprised of our 7/16" ACCESS Lifeline (30'), RescueTECH Double PMP (2), OD50 Carabiners (2), Prusik Cord, and pouch (will attach to harness). Ultimate Strength: 9,000 lbf. General Use

614412	Screwgate	220.00
614413	Autolock	240.00



Personal CSR / Transfer Kit

Built-In Safety Cam

Great tool for rescuers transferring the victims load to a new rescue line. Can be used as either a 4:1 or 5:1 system. Works like a "power-assist" pick-off strap. Utilizes the Micro CSR Pulley for hauling safety. Complete with storage pouch that will attach to rescue harness. Maximum Lift: 48". Weight: 50 oz.

614433	Autolock	275.00
614436	Screwgate	265.00




Rescue System Change-Over Slings

Great Addition To Pre-Rig Systems

Allows rescuers to extend a Z-rig past the lowering device without having to tie a "green" sling. Length: 15" Super Strong 8,500 lbf. WLL: 850 lbs.

753105	Dogbone Z-Rig Sling	8.25
753106	Super H.D. Z-Rig Sling	23.00

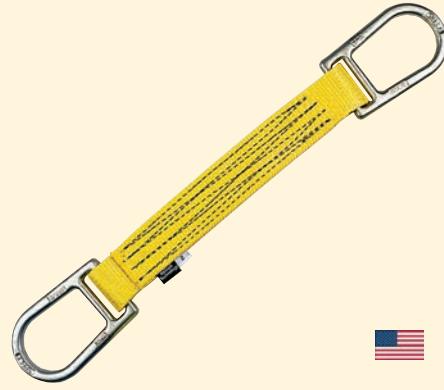

Rescue System Change-Over Sling w/ "D"

Great Addition To Pre-Rig Systems

Allows rescuers to extend a Z-rig past the lowering device without having to tie a "green" sling. Super Strong: 16,000 lbf.




4:1 / 5:1 Extractor™ Load Transfer Kit

This kit is a mechanical advantage system that allows the user to safely transfer a load. It provides the security of a built-in safety cam. 4:1 Kit complete with 40 feet of rope for 10' of lift. Available with Autolocking or Screwgate carabiners.

614422	4:1 Load Transfer, Autolock	385.00
614425	4:1 Load Transfer, Screwgate	375.00

Meets NFPA 1983 / ANSI/OSHA strength requirements.



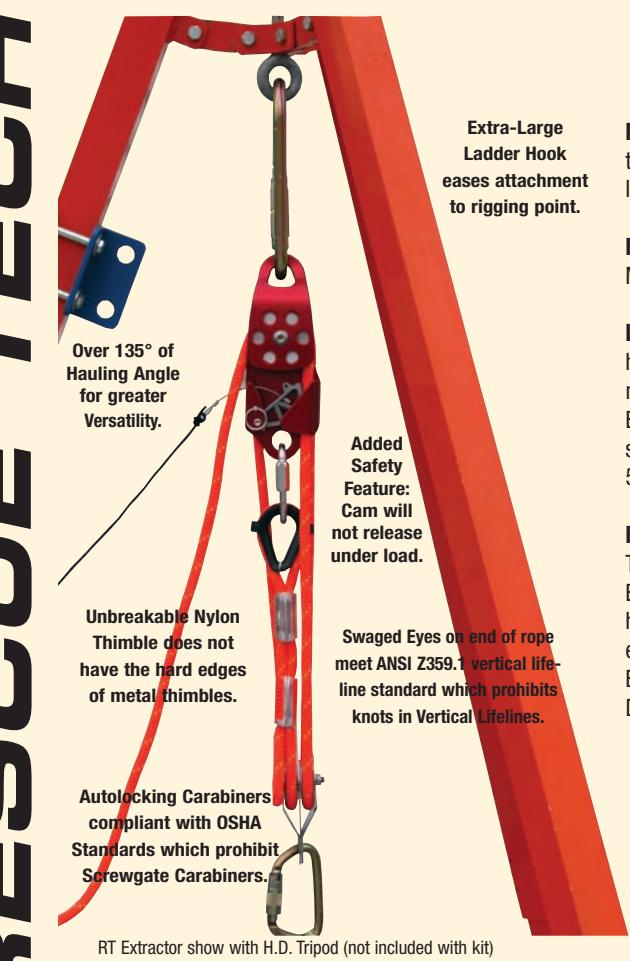

System Rating: General Use

1/2" Extractor™ CSR Kit With Rope / Equipment Bag

614210	Basic 37 - 150 ft. of rope	675.00
614212	Basic 50 - 200 ft. of rope	750.00
614211	Deluxe 37 - 150 ft. of rope	780.00
614213	Deluxe 50 - 200 ft. of rope	880.00

7/16" Extractor™ CSR Kit

With Vapor Tight Case

614202	Basic 25 - 100 ft. of rope	580.00
614204	Basic 50 - 200 ft. of rope	700.00
614203	Deluxe 25 - 100 ft. of rope	750.00
614205	Deluxe 50 - 200 ft. of rope	850.00

7/16" Extractor™ CSR Kit

With Rope / Equipment Bag

614208	Basic 50 - 200 ft. of rope	630.00
614209	Deluxe 50 - 200 ft. of rope	750.00

Extractor™ Confined Space Rescue Kit Confined Space Personnel Rescue Kit



FOR RESCUE Used as 4:1 Block and Tackle or "piggy-backed" onto main haul line. Decreases training needs for mechanical advantage systems. Great re-direct pulley with a built-in safety. No loss of haul due to slack in a prusik cord or external camming safety.

FOR INDUSTRY Easy to use. Meets OSHA 1910.146 Mechanical Retrieval Device standard. Meets ANSI Z359.1 vertical lifeline standards and autolocking carabiner requirements.

LIFTING SAFETY Unit works as a hauling system with a "deadman's" safety. Included safety pin holds cam in either open (rope will run freely in both directions) or in safety position. Rope will move in hauling direction only and cannot be removed or fall out when safety is engaged. Extractor™ may be used horizontally and can be attached to a haul-line to act as a 4:1 hauling system. 1/2" version available in 37 ft. and 50 ft. lift capacity. 7/16" version available in 25 ft. and 50 ft. lift capacity.

REMOTE LOWERING CAPABILITY The attached cable allows remote control of the safety cam. This makes it possible to place the Extractor™ unit where it cannot be directly accessed. Extractor™ design provides over 135° of hauling line movement. It does not limit hauling team to standing "in-line" with the rope system. The pulley sheaves are equipped with Oilite™ bushings and will accept ropes up to 1/2" diameter. The Extractor™ frame is constructed of high tensile aluminum alloy. WLL: 1,000 lbs. Dimensions: 9" x 3". Color: Red.

All Kits include:

- ACCESS Lifeline w/ swaged eye
- EXTRACTOR™ CSR Pulley
- Double Pulley
- Autolocking Carabiners
- Carrying Case / Bag

Deluxe Kits also include:

- Fall Protection Harness
- Lifting Bridle



⚠ WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.





Confined Space Rescue Set

Designed to provide a 2-person team with a set of equipment that allows for the rescue of victims. Comes complete with Tripod and Extractor CSR Kit for an anchor point and retrieval system. A separate belay may be set up with the included Petzl I'd Belay device and 150 ft. section of 1/2" ACCESS Lifeline. Rigging equipment and edge protection is also included. All personal and team equipment, as well as hardware and tripod storage is included.

2998123 3,550.00

2	EOS Headlamp	1	Load Release Sling
2	Vertex Vent Helmets	1	11mm Aluminum Carabiner, Screwgate
2	Rope Technician Glove, Pr	1	Remote Retrieval Hook
2	Vanguard Class III Rescue Harness	1	Extractor Pole, 12'
1	Technician Tripod w/ Tripod Bag	1	RescueTECH Edge Pad, Wide
1	Petzl I'D Belay Device	2	RescueTECH Rope Guard, 24" (Red)
1	1/2" ACCESS Lifeline x 150 ft. (Blue)	1	RescueTECH Rope Bag, Medium (Blue)
1	Technical Rescue Rigging Plate	1	Rescue TECH Deluxe Equipment Pack (Blue)
10	OD50 Steel Carabiners, Screwgate	2	RescueTECH Duffle Bag, Large (Blue)
1	RescueTECH PMP, Bushing		
1	1/2" Extractor CSR Kit w/ Bag, 150 ft.		
2	Rigging Sling w/ D, 8 ft.		

Items shown for illustration purposes - Not to Scale.
Items subject to change if new/improved components become available.

TECHNote™ STEEL vs. ALUMINUM CARABINERS

1. Steel is more wear-resistant than aluminum.
2. Steel carabiners are more ductile, thus allowing a greater amount of energy to be absorbed by the carabiner prior to failure.
3. The ductility also helps the carabiner be more resistant to misuse such as non-straight line loading.
4. Steel carabiners are inherently more resistant to corrosion in alkaline environments.
5. Aluminum alloy carabiners are not suitable for use in combustible environments. D.I.N. recommends and B.S. 1397 specifies that steel carabiners be used in explosive environments. When aluminum and steel oxides combine, very high temperature spark is produced. The steel-to-steel contact sometimes cause a low temperature spark, but no data to show that this will ignite atmospheres.



Remote
Retrieval Hook
and Extension
Pole included
in Kit ONLY

Spin-Lock Rescue / Retrieval System

Locking Pulley for Combination Raise / Lower System

The Spin-Lock Rescue system is a pre-rigged 4:1 Hauling system that utilizes a unique pulley with sheaves that rotate in only one direction. When properly rigged, this system works as an efficient 4:1 mechanical advantage pulley system that also provides friction to control the load when in lowering mode. The special sheave are mounted on a unique one-way bearing that allows the user to easily control a rescue load. Also, included is a Handled Ascender to control and anchor the system when at rest. The attached foot loop also aids the rescue in raising heavier loads.

The Spin-Lock Rescue / Retrieval Kit is a pre-rigged kit that combines the RescueTECH Remote Retrieval Hook and Extension Pole access system with a Spin-Lock Rescue / Retrieval system. The remote hook and extension pole allows for non-entry remote attachment of a rescue lifeline to a victim in a confined space or vertical environment.

29984401	Spin-Lock System 50 ft.	875.00	29984421	Spin-Lock Kit 50 ft.	975.00
29984402	Spin-Lock System 75 ft.	960.00	29984422	Spin-Lock Kit 75 ft.	1100.00
29984403	Spin-Lock System 150 ft.	1,200.00	29984423	Spin-Lock Kit 150 ft.	1325.00



NEW

Rope Access Technician Equipment Set

A simple set of personal equipment for basic Rope Access work.

- 1 Micro Pulley
- 2 Shunt
- 1 Vertex Vent Helmet
- 1 Petzl I'D Small
- 1 "I" Lanyard, 24"
- 1 "I" Lanyard, 32"
- 1 Pro Leather Glove, Pair
- 1 Handled Ascender
- 1 Chest Ascender
- 2 Adjustable Foot Sling
- 10 Aluminum Offset D Carabiner
- 2 6mm Rapid Link
- 1 10mm Tri-Link
- 1 Vanguard Class III Harness
- 1 RescueTECH Gear pack

29982013 1,200.00



Rescue Anchor Set

We have packaged two of our Heavy Duty Anchor Straps with a Wear Guard and Delta Rapid Link to give rescuers a quick, secure, and hard wearing anchor sling set. Includes storage bag.

29982101	Large, 8' Anchor Slings	100.00
29982102	Medium, 6' Anchor Slings	90.00



Lanyard Not Included

Basic Water Rescue Set

The bare minimum equipment to have while working around water. Includes U22 Pro PFD, River Rescue Short Knife, Fox Mini Whistle, 3/8" Throwbag x 50 ft., and Mesh storage bag.

29982003	Basic Water Rescue Set	195.00
----------	------------------------	--------

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



12' Self-Bailing Raft Set

A basic Set of Raft Equipment that includes what an existing water rescue team needs for boat operations. Large, wide raft for excellent stability. Self-Bailing Function keeps water from filling up and capsizing the raft.

29981012 2,800.00

1	12' Self Bailing Raft w/ 2 thwarts	1	12vDC Electric Inflator
1	72" Paddle	1	Manual Barrel Pump Inflator
4	60" Paddles	1	Raft Repair Kit





2 Rescuer Confined Space Standby Set

The set is the minimum set of equipment needed to start a standby team and access the patient. Includes harness and personal safety equipment for 2 rescuers.

29981001 2,000.00

2	Observer NFPA Rescue harness	2	Rope & Equipment Bags
2	Technician's Rescue Gloves	2	8mm Prusik x 6 ft.
2	Vertex Vent Helmet	2	8mm Prusik x 5 ft.
2	EOS Headlamp	10	OD50 Rescue Carabiner
2	Knee Pads, pair	2	Aluminum D Screwgate Carabiner
2	Rescuer Gear Bag	4	2.5" Prusik Minding Pulley
1	1/2' ACCESS Lifeline x 150' (Blue/Yellow)	2	Load Release Strap
1	1/2' ACCESS Lifeline x 150' (Red/Yellow)		



Technical Rescue Team Member Set

The basic starter set for most team members. Includes: Vanguard NFPA Class III Harness, Vertex Vent Helmet, EOS LED Headlamp, 3 OD50 NFPA carabiners, Rescue 8 Descender, Technician's Rescue Gloves, 8mm Prusik cord x 5 ft., 8mm Prusik cord x 6 ft., Harness Rigging Pouch, Daisy Chain, and a duffle bag.

29981011 Team Member Kit 600.00



Technical Rescue Team Set

The minimum team equipment required to handle most high or low-angle rope rescue responses. Sufficient for rescues that require both raising and lowering of a patient.

29982012 3,550.00

1	8mm Prusik x 6'	5	2.5" PMP	1	Load Release Sling
6	8mm Prusik x 5'	1	Multi-Unit Edge Roller	1	Deluxe Rescue Etrier
2	1/2" Access x 150'	1	Rope Pad, Wide	2	Anchor Sling, 6'
1	Rescue Rappel Rack	4	Rope Guard, Red	2	Anchor Sling, 8'
2	Rescue Ascender	1	Rescue Stretcher, S.S.	2	1" H.D. Web x 20'
1	Rigging Plate	1	Quick-Fit Lashing Kit	2	1" H.D. Web x 12'
15	RD70 Rescue Carabiner	1	Stretcher Patient Harness	2	Rope Bag
1	Offset D Carabiner, Auto	1	Stretcher Equipment Pack	1	Duffle Bag, XL
4	Delta Link	1	Adjustable Bridle Kit	1	Equipment Cache
3	Aluminum Carabiner, S/G	1	Transfer Sling		



Basic First Responder Rescue Set

The Basic Equipment set is designed to provide access to a patient prior to the full rescue team's arrival. Two complete sets consisting of an NFPA full body harness, helmet, Gloves, and descender are complimented by 200 ft. of NFPA lifeline (complete with rope bag), carabiners, descenders, and rigging sling. All personal rescue equipment may be stored in included heavy duty equipment bag.

29981002 1,200.00





4:1 Hauling Kit

Block and Tackle System

Complete hauling kits that are ready to use. Each kit contains 1/2" Rescue rope & prusik cord, high strength pulleys, Gibbs Ascenders and RescueTECH Carabiners complete the system. 4:1 Block and Tackle pulley system is packaged in Rope and Equipment Bag, and is ready for the rescuer to simply reach in and grab the carabiner to attach to the rigging point.

610604	4:1 Hauling Kit, 150 ft.	455.00
610624	4:1 Hauling Kit, 200 ft.	510.00

Meets NFPA 1983/ANSI/OSHA strength specifications.



Z-Rig Haul Set

RescueTECH equipment packaged in a ready-to-rig 3:1 Z-Rig system. Includes: Pulleys, Rope Grab, Prusik, Carabiners, Rope and Storage Bag.

29984151150	150'	525.00
29984151200	200'	575.00



USAR Pack Rescue Set

An equipment set designed to provide equipment for basic rigging, access, and rescue.

1	1/2" NFPA Rope*	2	Anchor Sling, 8 ft.*
8	Rigger Large D Carabiner*	2	Anchor Sling w/ D, 6 foot*
2	Gibbs Ascender, Free Running*	2	2.5 PMP Rescue Pulley*
1	1/2" Rescue Ascender*	1	2" H.D. Single Pulley*
1	NFPA Rescue 8 Descender*	2	Rope Guard, 18"
1	Rescue Rack*	1	USAR Rope & Equipment Pack
350526	150 ft., Blue	980.00	350536 200 ft., Blue 1,075.00
350524	150 ft., Red	980.00	350535 200 ft., Red 1,075.00

*Meets NFPA 1983/ANSI/OSHA strength specifications.



Raise / Lower Set

Equipment set-up popular at many state fire/rescue academies. Sufficient for a Z-Rig Raise and Rack Lower System.

1	1/2" NFPA Rescue Rope*	2	8mm Cord x 5 ft.
2	10' Anchor Sling*	1	8mm Cord x 6 ft.
5	Large D Steel Carabiners*	1	Dogbone Rigging Sling*
1	Rigging Plate*	1	Equipment Saddlebag
1	Rescue Rack*	1	Rope Bag
2	PMP Rescue Pulley*		

29982120	200' System	600.00
29982130	300' System	710.00

*Meets NFPA 1983/ANSI/OSHA strength specifications.



RESCUE TECH

www.rescuetech1.com

Deluxe Equipment Pack Set

A set of equipment designed to meet the basic needs of rescuers. Use this set of equipment with two life safety ropes and create a raise / lower system with belay system. Multiple mechanical advantage systems can be built as well as specialized rigging systems.

29983420 800.00



2 8mm Prusik x 5'	10 RD70 Carabiner, S/G	2 Anchor Sling w/ D, 6'
2 8mm Prusik x 6'	3 2.5" Single PMP	2 1" H.D. Web x 20'
1 Rescue Rack	3 2.5" Double PMP	1 1" H.D. Web x 25'
1 Aluminum D, S/G	2 Rope Guard, 18"	1 Load Release Strap
1 Delta Rapid Link	2 Anchor Sling, 8'	1 Deluxe Equip. Pack



USAR Pack Deluxe Rescue Set

An equipment set designed to provide equipment for basic rigging, access, and rescue. Set is comprised of:

1	1/2" NFPA Rope x 200 ft.	2	Red HD Web, 25 ft.
12	RescueTECH Large D Carabiner	2	Orange HD Web, 20 ft.
2	Gibbs Ascender, Free Running	2	Blue HD Web, 15 ft.
2	1/2" Rescue Ascender	2	Yellow HD Web, 12 ft.
1	NFPA Rescue 8 Descender	2	Green HD Web, 5 ft.
1	Rescue Rack	4	8mm Prusik Cord, Long
4	Anchor Sling w/ D, 6 foot	4	8mm Prusik Cord, Short
4	2.5 PMP Rescue Pulley	1	USAR Pack
1	2/5" Double PMP Rescue Pulley		
2	Rope Guard, 18"		
1	Delta Rapid Link		
1	Technical Rescue Rigging Plate		
1	10" Steel Cable Sling		

350566 Blue 1,500.00
350564 Red 1,500.00

Meets NFPA 1983/ANSI/OSHA strength specifications.

Bag Tether secures bag to tower allowing rescuer to more easily perform the rescue

RescueTECH Load Transfer System moves the rescue load onto the Tower Rescue System

Adjustable Rigging sling attaches Tower System to virtually all towers.

Internal Compartment keeps Transfer and Lowering Systems separated from Rope.



Tower Rescue System

A Rescue Technology original. Specially designed pack and rescue system allows one-handed rigging, rescue and lowering of patient. Packaged in a RescueTECH Tower Rescue Pack. Pack is designed to allow one-hand-attachment to tower and one-hand detachment of shoulder straps. Adjustable Rigging Sling easily secures Transfer and Lowering Systems to the tower. Transfer system allows rescuer to move the patient onto the rescue system. Load is lowered using Anthon Lowering device. Features Certified NFPA 3/8" Rescue rope.

29982156 Tower Rescue System, 300 ft. 775.00





RescueTECH 2" NFPA Single

For Ropes Up to 1/2" Diameter

A pulley that works well for all rescue and work needs.

Dimensions 4.25" x 2.5"
Strength 9,000 lbf.
WLL 900 lbs.
Weight 7.5 oz

610721 RT 2" Single, Bushing 42.50

Meets NFPA 1983/ANSI/OSHA strength specifications.



RescueTECH 3" NFPA Single

For Ropes Up to 5/8" Diameter

A new high-strength, long wearing design. Sideplate bend to the 3 carabiner rigging point reduces flexing and stresses put on bends during high load. 3/16" sideplates are designed to protect the rope as it travels through the pulley. In fact, a 5/8" diameter rope is protected by the sideplates from edge abrasion.

Dimensions 6.25" x 3.75"
Strength 11,241 (50 kN)
WLL 1,124 lbs.
Weight 16 oz.

610731 RT 3" Single Bushing 64.00

Meets NFPA 1983/ANSI/OSHA strength specifications.

RescueTECH 3" NFPA Double

For Ropes Up to 5/8" Diameter

The matching Double Pulley to our new RT 3" Single. Complete with Becket Rigging point.

Dimensions 7.25" x 3.75" x 2.325"
Strength 11,241 lbf.
WLL 1124 lbs.
Weight 24 oz.

610732 RT 3" Double, Bushing 82.00

Meets NFPA 1983/ANSI/OSHA strength specifications.



RescueTECH 2" NFPA Double

Matching Pulley for our Extractor CSR

Designed for ropes up to 1/2" Diameter. High strength and lightweight makes this the ideal multi-use pulley for rescue.

Dimensions 5" x 1.75"
Strength 9,000 lbf
WLL 900 lbs.
Weight 12 oz.

610722 RT 2" Double, Bushing 59.00

Meets NFPA 1983/ANSI/OSHA strength specifications.



RescueTECH Micro Pulley

A strong pulley in a small package. Made from alloy aluminum, this pulley is perfect for a variety of rescue uses. From Tower Rescue to Water Rescue the RT Micro is one of the most versatile pulleys around. Made for ropes 5/16" - 7/16" Diameter.

Dimensions	Single	Double
2.9 x 1.75"	3.5 x 1.75 x 1.9"	
7,868 lbf	7,868 lbf.	
2.9 oz.	5.1 oz.	

6101151	RT Micro - Black	29.00
6101154	RT Micro - Red	29.00
6101284	RT Micro Double - Red	53.00

Meets NFPA 1983/ANSI/OSHA strength specifications.



RescueTECH Spin-Lock Pulley Uni-Directional Pulley

Great for raise / lower systems. Pulley sheave turn one direction making hauling easy and providing friction as the rope is belayed through the device.

Dimensions 6.7" x 3.3" x 2.4"
Strength 10,120 lbf.
WLL 1,120 lbs.
Weight 26 oz.
Color Red

2014700 RT Spin Lock Pulley 195.00

Meets NFPA 1983/ANSI/OSHA strength specifications.




RescueTECH Extractor™ CSR Hauler

The EXTRACTOR™ CSR HAULER pulley features an integral safety cam to secure the progress of hauling systems. The first in a series of Rescue Technology pulleys that meet the rugged requirements of Rope Rescue Technicians, the EXTRACTOR™ CSR HAULER is designed for 1/2" Life Safety Rope and will accommodate ropes from 3/8" - 9/16". Special safety cam design is rope friendly and can be locked out of the way when a standard double pulley is needed. Super-strong, the EXTRACTOR™ CSR HAULER has an 1,100 lb. safe Working Load Limit.

614024	RT Extractor CSR, Double	229.50
614014	RT Extractor CSR, Single	199.50

Meets NFPA 1983/ANSI/OSHA strength specifications.

GENERAL USE

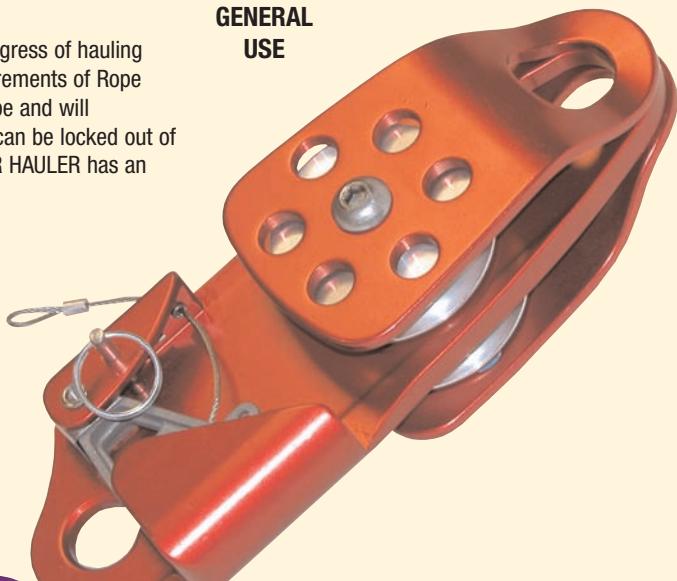

Micro CSR Pulley

The perfect size for light use and tower rescues. Ideal for 8mm - 7/16" ropes. Works with ropes up to 1/2". Built-in safety cam holds rope for use in "Jigger" or "Short-Haul" Systems.

Strength	7,000 lbf.	31 kN
WLL	700 lbs.	318 kg
Dimensions	6" x 2"	152 x 51mm
Weight	8 oz.	226 gm
Color	Purple	

614321	Micro CSR Pulley	143.00
--------	------------------	--------

Meets NFPA 1983/ANSI/OSHA strength specifications.

LIGHT USE



LIGHT USE



Micro Strap Pulley

Economical Personal Use Pulley

Simple Sideplate design provides extra safety for rescuers. Ideal for 8mm - 7/16" ropes.

Strength	4946 lbf.	22 kN
WLL	495 lbs.	225 kg
Dimensions	3.2" x 1.8"	82 x 45mm
Weight	3.35 oz.	95 gm
Color	Red	

2014037	Micro Strap Pulley	19.00
---------	--------------------	-------

Meets NFPA 1983/ANSI/OSHA strength specifications. BS EN 12278

LIGHT USE



Micro Pulley

Lightweight Snatch Block Design

The perfect size for light use and tower rescues. Ideal for 8mm - 7/16" ropes. Works as PMP pulley. Sheave Diameter: 1.25". Tread Diameter: 1.1".

Strength	4946 lbf.	22 kN
WLL	495 lbs.	225 kg
Dimensions	3.2" x 1.2"	82 x 30mm
Weight	4.3 oz.	122 gm
Color	Red	

2014038	Micro Pulley	25.00
---------	--------------	-------

Meets NFPA 1983/ANSI/OSHA strength specifications. BS ED 12278

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



540° Rescue Belay

A mechanical belay device specifically engineered for fire service and industrial rescue teams. Simple and easy to use. Symmetrical design allows for bi-directional loading. Self-locking with sudden falls. Built-in release lever eliminates need for release hitch. Passes rescue belay competence criteria. Strength: 9,000 lbf. Weight: 24 oz. UL Certified NFPA 1983. 1 year manufacturer's warranty.

2154540	Large (11.5 - 13mm)	303.00
2154541	Small (10.6 - 11.6mm)	303.00
899522	540 Belay Video	17.00





GENERAL
USE



GENERAL
USE



GENERAL
USE

2.5" Single Prusik Mindng Pulley

Strength 9,000 lbf. 40 kN
WLL 900 lbs. 454.5 kg
Dimensions 6.6" x 4.6" 168 x 117mm
Weight 12 oz. 340 gm

610634 2.5" Single, Bushing (Blue) 52.00

Meets NFPA 1983/ANSI/OSHA strength specifications.

2.5" Double Prusik Mindng Pulley

Strength 10,000 lbf. 46.7 kN
WLL 1,000 lbs. 477 kg
Dimensions 7" x 4.6" 178 x 117mm
Weight 24 oz. 681 gm

610644 2.5" Double, Bushing 85.00

Meets NFPA 1983/ANSI/OSHA strength specifications.

Extra-Large Prusik Mindng Pulley

For 5/8" Rope
Strength 11,240 lbf. 50 kN
WLL 1,124 lbs. 511 kg
Dimensions 6.1" x 4.1" 156 x 106mm
Weight 15.7 oz. 446 gm

6107018 XL PMP (Red) 72.00

Meets NFPA 1983/ANSI/OSHA strength specifications.



RescueTECH Micro PMP Pulleys

A smaller version of our popular PMP Pulleys. Designed for use with smaller ropes in load transfer systems or small haul rigs. Rating: Light Use.

Single
Strength 7,000 lbf. 31 kN
WLL 700 lbs. 318 kg
Dimensions 3" x 2.5" 76.2 x 63.5mm
Weight 3.2 oz. 91 gm 4.8 oz.

Double
Strength 7,000 lbf. 31 kN
WLL 700 lbs. 318 kg
Dimensions 3.75" x 2.5" 95.2 x 63.5mm
Weight 136 gm

610137 Single, Bushing (Gold) 38.00
610137D Double, Bearing (Blue) 65.00



Stainless Steel PMP Pulleys

Super-durable, corrosion-resistant Prusik Mindng Pulleys. Tough Stainless Steel Sideplates with alloy aluminum sheave and oil-impregnated bushing.

Stock Number	Description	Dimensions (in.) (mm)	Wgt (oz.)	Strength (lbf.)	WLL (lbs.)	Max Rope Dia. (in.) (mm)
610138	4" PMP, Bushing	8.7 x 7 215 x 155	42	15,000	1500	5/8 16 82.00
610129N	3" PMP, Bushing	7 x 5 155 x 120	15.25	16,000	1600	1/2 13 90.00



GENERAL
USE



Aluminum Single Rescue Pulleys

Designed for ropes up to 5/8" diameter. Ultra-lightweight sheave fitted with Oilite® bushing or sealed bearing and rotating high strength alloy aluminum sideplates. Triangular rigging hole accepts up to three 13mm carabiners. Can use a Big Hook carabiner as becket rigging point for mechanical advantage hauling systems.

2" Rescue Pulley

Strength	10,000 lbf.	44.5 kN
WLL	1,000 lbs.	455 kg
Dimensions	5.25" x 2.25"	131 x 56mm
Pitch Dia.	1.5"	37.5mm
Weight	8.6 oz.	244 gm
Color	Blue	

610012	Oilite® Bushing	55.00
610012B	Sealed Bearing	65.00

Meets NFPA 1983/ANSI/OSHA strength specifications for Pulleys

3" Rescue Pulley

Strength	10,000 lbf.	44.5 kN
WLL	1,000 lbs.	455 kg
Dimensions	7" x 3"	175 x 75mm
Pitch Dia.	2.3"	57.5mm
Weight	14 oz.	397 gm
Color	Orange	

610013	Oilite® Bushing	65.00
610013B	Sealed Bearing	79.00

Meets NFPA 1983/ANSI/OSHA strength specifications for Pulleys



Knot Passing Pulley

Ideal For Use As Carriage Pulley

Heavy duty knot passing pulley. Rotating sideplates and a rigging point that will accommodate three 13mm rescue carabiners. Aluminum pulley sheave with Oilite® Bushing for durability. The Wide Pulley is designed for ropes up to 1/2" diameter. The large hole in center of the sideplates will accept an Big Hook carabiner for balanced hauling when unit is used as the top support pulley in rope traverse systems. Pitch Diameter: 2". Dimensions-Medium: 8" x 3" x 3.5". Strength: 10,000 lbf. WLL: 1000 lbs. Weight: 21 oz. Color: Red.


610015	Medium	79.00
610016	XLarge	121.00

Meets NFPA 1983/ANSI/OSHA strength specifications for Pulleys

GENERAL
USE



GENERAL
USE

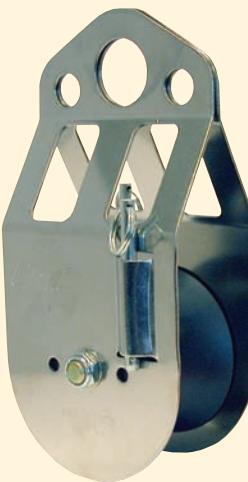

GENERAL
USE



Stainless Steel Carriage Pulley

The most versatile Knot-Passing / Highline pulley yet. Extra-wide 3" sheave easily passes knots in 1/2" rope. Large center rigging hole accepts up to three large carabiners, two smaller holes provide tagline attachments. Pins stowed directly on sideplates install to lock the sheave, allowing the pulley to be used as a high-strength tie off. Weight: 24.6 oz.; Dimensions: 10" x 5"; Efficiency: 91.4%; Strength: 15,000 lbs.

6102128	S.S. Carriage Pulley	166.00
----------------	----------------------	--------

Meets NFPA 1983/ANSI/OSHA strength specifications for Pulleys

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.






GENERAL USE



GENERAL USE

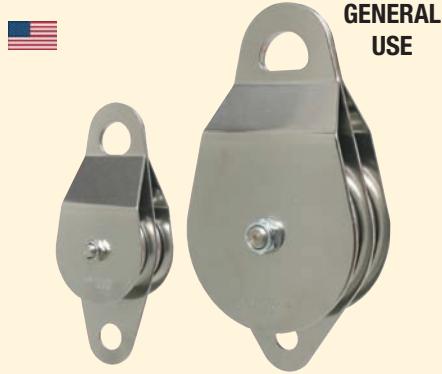

GENERAL USE



GENERAL USE

Stainless Steel Lite Pulley

High strength pulleys designed for ropes up to 5/8" diameter. 3" sheave diameters. Features high grade stainless steel sideplates and aluminum pulley sheave. Extra large rigging point accepts two rescue carabiners. Available with bronze bushing or sealed needle bearing.

Stock Number	Description	Dimensions		Wgt (oz.)	Strength (lbf.)	WLL (lbs.)	Max Rope Dia.		
		(in.)	(mm)				(in.)	(mm)	
6102005	3" Lite - Bushing	6.4 x 4	160 x 100	20	16,000	1600	5/8	16	65.00
6102006	3" Lite - Bearing	6.4 x 4	160 x 100	20	16,000	1600	5/8	16	86.00
6102005D	3" Double-Bushing	7.25 x 4.25	184 x 108	37	20000	2000	5/8"	16	105.00

Stainless Steel Single Pulley

Built to be tough and durable at an economical price. Plain sideplates with rigging points that accommodate two rescue carabiners. Stainless Steel sideplates and axle for extra durability. Available with sintered bronze bushing or needle bearing.

Stock Number	Description	Dimensions		Wgt (oz.)	Strength (lbf.)	WLL (lbs.)	Max Rope Dia.		
		(in.)	(mm)				(in.)	(mm)	
6102118	2" Bushing, Steel	5 x 2.5	125 x 63	11.6	8,000	800	1/2	13	45.00
6102118A	2" Bushing, Alum.	5 x 2.5	125 x 63	7.7	8,000	800	1/2	13	41.00
6102122	4" Bushing, Alum.	8 x 4.5	200 x 112	35	20,000	2000	5/8	13	70.00
6102123	4" Bearing, Alum.	8 x 4.5	200 x 112	35	20,000	2000	5/8	13	77.00

Stainless Steel Double Pulley

Heavy Duty Stainless Steel Sideplates with aluminum sheaves. Available with sintered bronze bushing or needle bearing. Rating: General Use.

Stock Number	Description	Dimensions		Wgt (oz.)	Strength (lbf.)	WLL (lbs.)	Max Rope Dia.		
		(in.)	(mm)				(in.)	(mm)	
6102119	2" Bearing, Aluminum	6.5 x 2.5	162 x 62	13	11,000	1200	1/2	13	59.00
6102120	2" Bushing, Steel	6.5 x 2.5	162 x 62	20	11,000	1200	1/2	13	62.00
6102120A	2" Bushing, Aluminum	6.5 x 2.5	162 x 62	13	11,000	1200	1/2	13	56.00
6102124	4" Bushing, Aluminum	9 x 4.5	225 x 112	60	25,000	2500	5/8	16	144.00

Single Pulley with Becket

Specialized rigging pulleys with stainless steel sideplates and either an aluminum or steel sheave, with bearing or bushing. The aluminum sheave models are ideal in rescue situations for use with rope. By using the extra rigging hole at the bottom of the pulley, they can be daisy-chained together in block and tackle fashion. Steel sheave models are great for use with steel cable or rope. In high line situations, the extra hole can be clipped together for an extra margin of safety. Rating: General Use.

Stock Number	Description	Dimensions		Wgt (oz.)	Strength (lbf.)	WLL (lbs.)	Max Rope Dia.		
		(in.)	(mm)				(in.)	(mm)	
6102111	2" Bushing Alum	5.75 X 3	144 x 75	11	8,500	850	1/2	13	46.00

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



GENERAL USE



Left to Right: 2" NFPA Single, 4" NFPA Single



Left to Right: 2" NFPA Double(not available), 4" NFPA Double



Easy Lift Evacuation Pulley For Ski Lift Rescues

Designed to be connected directly to the main ski lift cable for lift evacuations. Manufactured of alloy aluminum body, nylon sheave, and stainless steel gate. Must be used with back-up lanyard and belay system. Weight: 1420 gm. Strength: 30 kN. Works on cable up to 55mm.

23896104

290.00




Stainless Steel Trolley Pulley

For Steel Cables

Sheaves turn on Sealed Ball Bearing for smooth, wobble-free use. Oversized stainless steel sideplates extend well beyond the sheaves to protect them from hard use. A rear slot allows a steel carabiner to surround the cable, allowing redundancy from the cable to the load. Dual Hardened Sheaves that will accommodate 3/8" or 1/2" cable.

6102221 Steel Cable 160.00

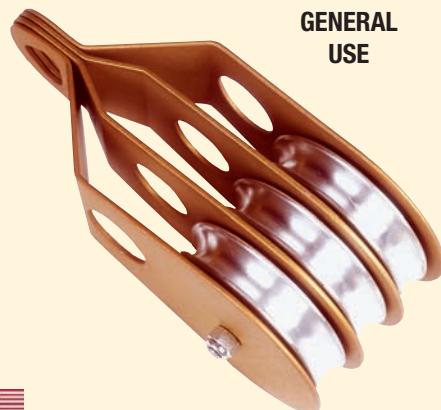

Triple Sheave Pulley

The only aluminum triple sheave pulley with rotating sideplates. Designed for 7/16" - 5/8" ropes. Can be reeved at any point on the line. High strength alloy aluminum construction with Oilite® Bushing or Sealed Bearing. Triple carabiner rigging point. Tensile Strength: 15,000 lbf. WLL: 1,500 lbs. Dimensions: 10" x 4" x 4.5". Pitch Diameter: 3.5". Weight: 70 oz. Color: Gold. Rating: General Use.

610034 4" Triple, Bushing 160.00
610034B 4" Triple, Bearing 201.00

Meets NFPA 1983/ANSI/OSHA strength specifications for Pulleys

GENERAL USE




Stainless Steel Triple Pulley

Super-Strong and Super-Durable. For rope diameters 3/8" - 5/8". Rigging Hole accommodates 3 large rescue carabiners. Dimensions: 8" x 4.75" Weight: 5.25 lbs. Strength: 30,000 lbs.

6102134 Bushing 170.00
6102135 Bearing 195.00

Meets NFPA 1983/ANSI/OSHA strength specifications for Pulleys



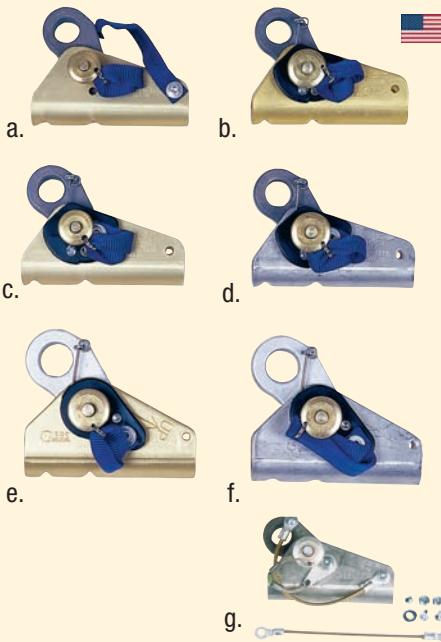


Gibbs Ascender

New Spring Design

One of the strongest closed cam type of rope-grab ascenders. Rounded tooth cam design minimizes rope wear yet holds on wet or icy ropes. New spring attachment increases cam's range of motion to decrease chance of spring breakage. 1/2" model attaches to synthetic ropes 5/16" to 1/2"; 3/4" version accommodates synthetic ropes from 5/8" to 3/4". The spring-loaded type is always in locked position and is recommended for general rescue use. For use on kernmantle rope only.

	Size/Shell/Description	Cam Type	Strength (lbf.)	Weight (oz.)	Rating	
a. 602011	1/2" Aluminum, Free Running	Forged	2,500	7	Light	48.00
b. 602012	1/2" Aluminum, Spring Loaded	Forged	2,500	7	Light	48.00
c. 602012F	1/2" Aluminum, Spring Loaded	Forged	5,200	9.2	General	65.00
d. 602112	1/2" Stainless Steel, Spring Loaded	Forged	5,200	12	General	65.00
e. 602013	3/4" Aluminum, Spring Loaded	Forged	5,200	14	General	68.00
f. 602113	3/4" Stainless Steel, Spring Loaded	Forged	5,200	20	General	73.00
g. 602201	Replacement Spring Kit (Ascender not included)					5.60

Meets NFPA 1983 strength specifications for ascenders.

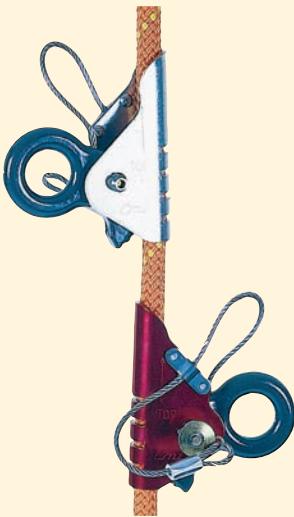

Top: Stainless Steel; Bottom: Aluminum

CMI Ropewalker Ascender

Manufactured from alloy aluminum or stainless steel and forged aluminum cam. Large attachment point accommodates multiple carabiners. Unique spring design allows for easy adjustment of tension. Spring tested to over 1 million cycles. 3/8" to 5/8" diameter rope capacity. Pin can be inserted from either left or right side to accommodate needs of rescuer. 3 sigma rated to 7,700 lbf. Rating: General Use. For use on kernmantle rope only.

602241	Aluminum	66.00
602245	Stainless Steel	72.50

Meets NFPA 1983 strength specifications for ascenders.



Gibbs Slinger™

We combine the rescue versions of the 1/2" Gibbs Ascender with our high strength 1" Flat web to create a versatile rope grab system that virtually eliminates torsion loads on the rope grab and carabiner.

602212A	Aluminum	80.00
602212S	Stainless Steel	84.00

Meets NFPA 1983 strength specifications for ascenders.



ISC Rescue Ascender

New Pin Design

Manufactured from high strength aluminum alloy. Machined from thick walled extrusion for extra durability. Shell has special curved rope interface section for superior rope strength and minimized rope damage. Rigging point will accommodate all of our carabiners and will pass many locking collars. Quick-attach pip pin for easy attachment. For use on kernmantle rope only.

602251	Standard, 7/16-1/2"	83.00
602252	Large, 5/8"	85.00

Meets NFPA 1983 strength specifications for ascenders. BS EN 567 Certified as Rope Clamps

WARNING

SHOCK LOADING

Ascenders: Standard cam-type ascenders can severely damage or destroy a rope if subjected to extreme shock loading. Use caution when using systems incorporating standard cam ascenders.

Ultrascender

One of the strongest open-sided ascenders available. Machined from solid aircraft aluminum extrusion with 4140 chrome-moly steel cam with a new non-metallic finish that has the same corrosion resistance as stainless steel and is harder than knife blades and files. The unit will accommodate ropes from 1/4" (6mm) to 5/8" (16mm) in diameter. Special safety gate design is superior to other open-sided ascenders. Attach to carabiners, ascender slings, or combination. Set includes one right and one left hand unit. Tensile Strength: 5,000 lbf. Rating: General Use. Dimensions: 7.5 x 9" ea. Wgt/pair: 18 oz.

GENERAL
USE



Top: Ultrascender (Black)
Bottom: Ultrascender (Red)


Industrial Rope Grab with Lanyard For Vertical Lifelines

Stainless steel fall arrest device especially designed for vertical applications. Unlike other cam-type grabs, these grabs slip before rope failure. Rope Grab clutching effect begins at 1,000 lbf. on 1/2" ropes. For this reason use ONLY on the correct diameter rope. These grabs have the 2" diameter rigging hole to prevent rollout of attaching snaps. Comes with a permanently attached nylon lanyard equipped with a double locking snap hook. Manufactured in the U.S.A. Weight: 1.5 lbs.

6025231	7/16" Rope Grab with Web Lanyard	125.00
6025241	1/2" Rope Grab with Web Lanyard	125.00
6025251	5/8" Rope Grab with Web Lanyard	125.00

Meets all OSHA, NFPA, CSA, and ANSI standards for rope grabs and ascenders.

GENERAL
USE

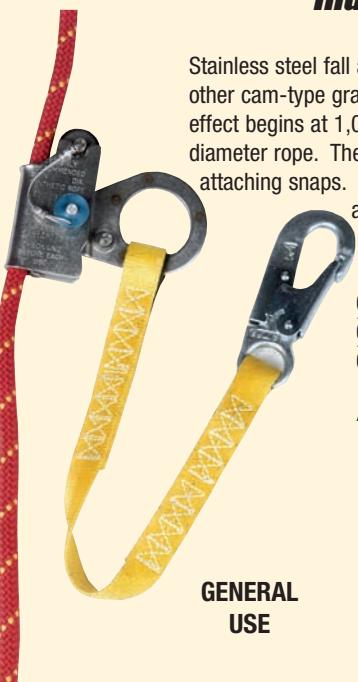

Antron Handled Ascender

A great new handled ascender.



Manufactured of aluminum, the Antron fits ropes 8mm - 1/2" in diameter. Special grip material on handle is very comfortable and is slip-resistant. Fits ropes 8mm - 1/2".



CE

GENERAL
USE

Weight: 8.5 oz. 204 gm
Dimensions 7.6" x 3.6" 194 x 93mm

602301	Left Hand (Gold)	67.00
602302	Right Hand (Blue)	67.00

Meets NFPA 1983 strength specifications for ascenders.

Antron Chest Ascender

Chest Ascender for Rope Access

Manufactured of aluminum, the Antron fits ropes 8mm - 1/2" in diameter. Works with our New VANGUARD™ and Observer™ Harnesses. Fits ropes 8mm - 1/2". Color: Blue.

CE



Weight: 4.9 oz. 140 gm
Dimensions 4.6 x 2.9 x 1.4" 117 x 74 x 36mm

602306	Chest Ascender	60.00
--------	----------------	-------

Meets NFPA 1983 strength specifications for ascenders.

GENERAL
USE





Petzl I'D® NFPA

For Descending and for Belaying, with an Anti-Panic function.

Swinging side plate with safety catch decreases risk of dropping device and allows rapid installation of the rope into the device. Anti-error feature helps avoid accidents due to incorrect installation of the rope in the device. Self-braking system: if the handle is released during descent, the cam rotates to pinch the rope and brake the user's descent. Anti-panic handle: the I'D® will lock onto the rope if the user pulls too hard on the handle. To descend, simply pull on the handle; the rate of descent is controlled by varying the grip on the free end of the rope with the other hand. For work positioning, the handle can be rotated to secure the I'D® in place on the rope, thus eliminating the need to "tie off" the device. May be used as a progress capture device in a haul system; allows rapid conversion between raising and lowering. Individually tested. Weight: 18.7 oz.

2354120N Large - NFPA G, 11.5-13 mm 210.00

2354120S Small - NFPA L, 10 -11.5 mm 210.00

CE EN 341 class A, Large: NFPA G. Small: NFPA L.

Pro-Traxion

Ratchet Pulley


For effective and comfortable hauling of heavy loads. Very effective as a progress capture device for travel along a Tyrolean traverse.

- 38mm sheave mounted on sealed ball bearings for high efficiency.
- Moving sideplate allows the rope to be installed when the device is attached to the anchor.
- Chrome-plated steel cam has inclined teeth and self-cleaning slots to provide grip on wet, icy or muddy ropes.
- For use with ropes from 5/16" - 1/2"
- Strength, Pulley only: 22 kN.
- WLL, Pulley only: 6 kN.
- Strength - Ratchet Pulley: 4 kN.
- WLL- Ratchet Pulley: 2.5 kN.



23541651 Pro-Traxion

115.00

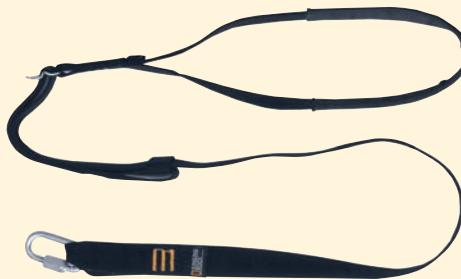

Adjustable Foot Sling

A handy sling that, when used with a handled ascender, allow the rescuer to climb up a rope. Easily attaches to ascender with rapid link (link not included). Adjustable length.

602431	Adjustable Foot Sling	15.00
60510106	Connector	2.20

6024321 Double Foot Sling

21.00



Ascender Sling Set

Designed for use with handled ascenders to allow rescuer to climb back up a rope. Manufactured of high quality 1" nylon webbing (Tensile Strength: 6,000 lbf.). One sling attaches to a seat harness, the stirrup connects a second ascender to the right or left foot. Weight: 8 oz./pair. Color: Orange.

602300	Medium - up to 6' height	20.00
602400	Large - over 6' height	20.00



Deluxe Ascender Sling Set

Can be configured for both Texas and "Frog" style ascending systems. Simply attach slings via rapid link or girth hitch to ascenders. Adjustable harness attachment slings give this set a wide size range. Manufactured of high quality 1" nylon webbing. Two slings attach to a seat/chest harness. The double foot loops connects a second ascender to the rescuers feet. Special adjuster for the foot loops help prevent loops from sliding off boots.

6024334


35.00

Accessories, Rapid Links and Carabiners not included

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



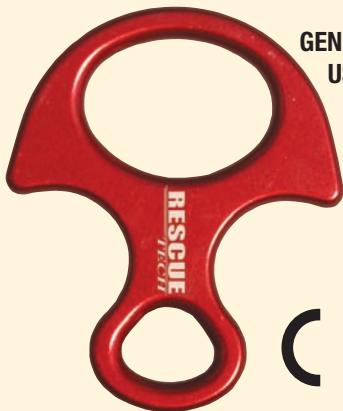


RescueTECH BailOut 8™

A compact 8 with ears for quick personal escapes. Machined from 1/2" alloy aluminum. Rescue "ears" are situated to provide a compact Rescue 8 design for escape systems. Dimensions: 4.5" x 3.75". Strength: 4,946 lbf. WLL: 300 lbs. Weight: 4 oz. Rating: General Use.

601008 BailOut 8™ 19.50

Meets NFPA 1983/ANSI construction specifications for Descenders.

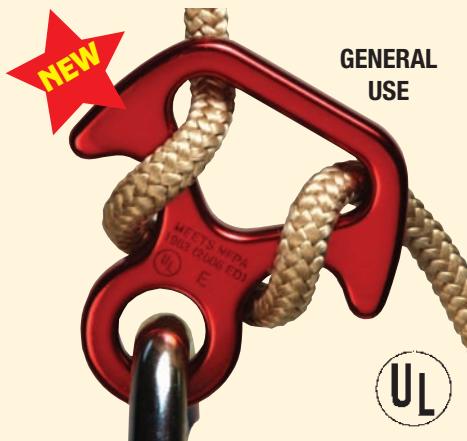

RescueTECH Escape 8

A compact Escape descender with ears for quick personal escapes. Rescue "ears" are situated to provide a compact Rescue 8 design for escape systems. Dimensions: 2 7/8" x 2 3/4". Strength: 3,150 lbf. WLL: 300 lbs. Weight: 4 oz. Rating: Escape Use.

6010064 Red 18.90
6010061 Black 18.90

Meets NFPA 1983/ANSI construction specifications for Descenders.



RT Escape Descender shown in one of many friction settings.

Escape Descender


Special descender plate with multiple holes that allow a small diameter escape cord to be rigged to accommodate different amounts of friction. **ALWAYS** test your personal rigging method to assure sufficient friction for a safe descent. Works with 8mm to 11mm diameter escape lines. Dimensions: 4" x 2.75". Tensile Strength: 5,000 lbf. Rating: General Use.

601005 Escape Descender 25.00

Meets NFPA 1983/ANSI construction specifications for Descenders.

Tuba® Belay Tube

Designed for lowering loads over long distances. The braking power is easily adjusted by varying the number of turns of rope around the device. Special shape allows the passage of a knot, allowing several ropes to be joined together for long lowers. Weight: 43.7 oz. NFPA G.

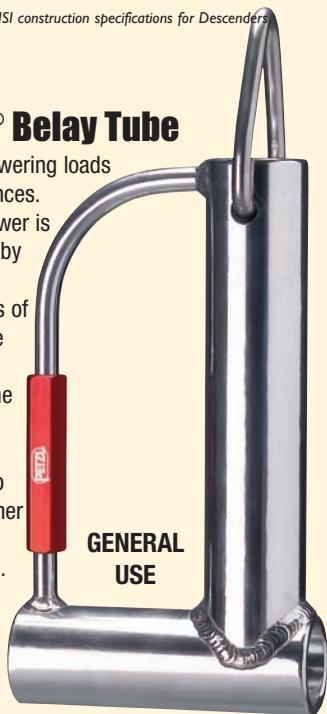

2354212 Tuba 179.95

Meets NFPA 1983/ANSI construction specifications for Descenders.



Antron Double Stop Descender

A manually operated controlled descent device that utilizes a cam assembly that provides friction on the rope to hold a load, or allow the load to descend. To begin descent, the user depresses the control lever. If the control lever is fully depressed in a panic situation, the descent will stop. Normally, connected directly to the users seat harness, the Antron may be attached to a rigging point and used as a lowering device. Can be placed on the rope at any point. WLL: 300 lbs. For 3/8" - 7/16" ropes. Best control with 7/16" ropes. Dimensions: 7.5 x 3.3". Weight: 8 oz.

6010097 Antron Descender, 7/16" 130.00

Meets NFPA 1983/ANSI construction specifications for Descenders.



ISC Descender

Superior Control vs. Competition

Special descender with a 500 lb. Working Load Limit. Complete with a double action anti-panic handle. Manufactured from aluminum alloy. 100% inspected and function tested. Works on rope diameters: 10.5 - 11.5mm. **ALWAYS** test your personal rigging method to assure sufficient friction for a safe descent. Tensile Strength: 5,000 lbf. Dimensions: 193 x 79 x 35mm Rating: General Use.


601340 ISC Descender 140.00

Meets NFPA 1983/ANSI construction specifications for Descenders.

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



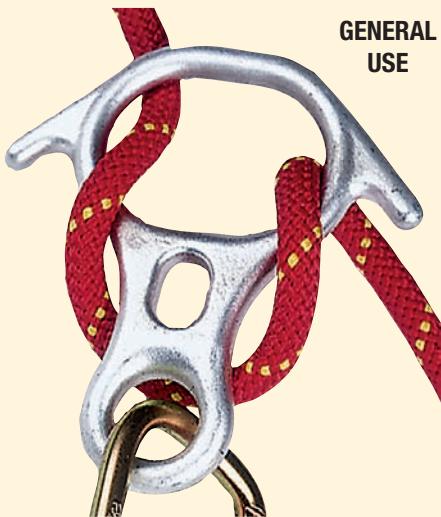

RescueTECH™ Steel Rescue 8

Three Dimensional Design

Forged Steel Rescue 8 Descender. For ropes up to 3/4" diameter. Three dimensional design allows user to vary friction depending on which way the descender is used. Drop forged. Chromium Plated Silver. Tensile Strength: 15,000 lbf. WLL: 1500 lbs. Dimensions: 6.75" x 6.75". Weight: 24 oz. Rating: General Use.

6010070 Silver 50.00
6010071 Black - **NEW!** 60.00

Meets NFPA 1983/ANSI construction specifications for Descenders.



Rescue TECH Figure 8

Traditional Design

The RescueTECH Figure 8 is an economical anodized figure 8 descender for light duty use. Forged aluminum construction. Rappel/Belay Usage Strength: 7000 lbf. WLL: 700 lbs. Dimensions: 5 1/2" x 2 7/8". Weight: 4.8 oz. Rating: General Use.

601316 Figure 8 (Blue) 12.00
601311 Figure 8 (Black) 12.00

Meets NFPA 1983/ANSI construction specifications for Descenders.

GENERAL
USE



CMI Rescue / Regular 8 Descenders

The Original Rescue 8

Cold forged design with durable hard-coat anodized finish. Rescue 8 has "ears" to aid in "locking-off." Color: Charcoal. Rating: General Use. Dimensions: Large: 6.6" x 6"; Small: 5.5" x 2.73".

		Dim. (in.)	Weight (oz.)	Strength (lbf.)	WLL (lbs.)	NFPA Rating	
601000N	Rescue 8	6 3/4 x 6 1/8	7.8	10,000	1000	General	46.00
601001N	Regular 8	5 1/2 x 3	4.2	10,000	1000	General	28.60

Meets NFPA 1983/ANSI construction specifications for Descenders.

GENERAL
USE



Stainless Steel Small Rescue 8

A small rescue 8 with the durability and strength of Stainless Steel. Strength: 9000 lbf. Only 5.7" long, this tough unit will fit into almost all rescue kits. Dimensions: 5.7" x 5.3". Weight: 16 oz.

240180510 40.00



Descender Link shown with BailOut 8 (not included)



Descender Link

A multiple loop extension for descenders. Built with the same high strength design as our daisy chains, the directional loops allow multiple adjustments of the overall length of the descender system.

758124 Descender Link 13.00


CAUTION: Care must be taken when using the Steel Rescue 8 to rappel, belay, or lower personnel or heavy loads. Steel does not provide as much friction as aluminum figure 8's of similar design and size.

WARNING


Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



**LIGHT
USE**

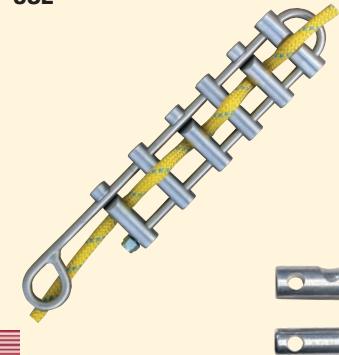

**GENERAL
USE**

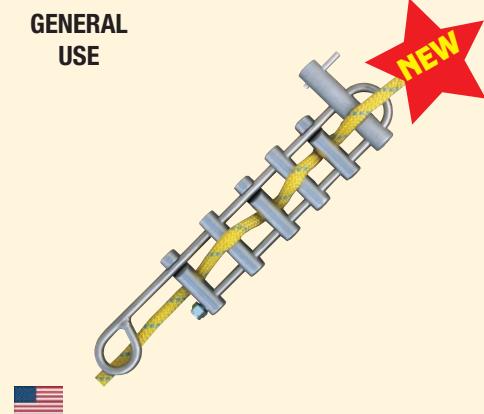


RescueTECH Rappel Rack

This is the classic design developed in the 1960's. Primarily designed as a personal rappel device on a single rope 3/8" to 1/2" in diameter. Top Bar and Top Bar - Hyperbar has a training groove on one side to assist in guiding the rope and aid in proper rigging.

601024W	Standard, Complete	66.00
601011	Replacement - Grooved	6.00
601010	Replacement - Angle Slot	5.25
601011H	Replacement - Hyperbar	15.00

Meets NFPA 1983/ANSI construction specifications for Descenders.

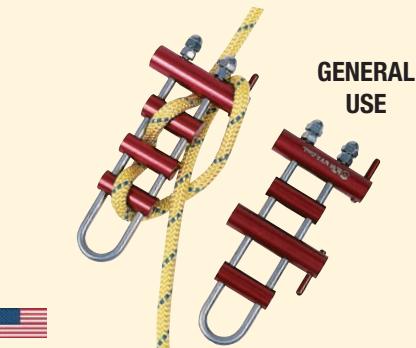

**GENERAL
USE**

CMI Mini Rescue Rack

A handy alternative for shorter drops and lighter loads. Similar in design to the standard CMI Rescue Rack by uses 5/16" Stainless Steel for the frame and aluminum for the brake bars. Top bar is oversized with a single lock-off pin. Pre-assembled with two fixed and two straight slotted bars. Weight: 11 oz. Dimensions: 8.25" x 3.5". Strength: 14,000 lbf. Rating: General Use.

601112	Standard HyperBar	69.50
601113	Double HyperBar	83.00

Meets NFPA 1983/ANSI specifications for Descenders.

RescueTECH Rescue Rappel Rack

This is an upgraded version of our popular rappel rack. Large bars provide greater strength and control of rescue loads. Top Bar and Top Bar - Hyperbar has a training groove on one side to assist in guiding the rope and aid in proper rigging.


601124	Rescue Rappel Rack	80.00
---------------	--------------------	-------

Meets NFPA 1983/ANSI construction specifications for Descenders.

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.

**GENERAL
USE**

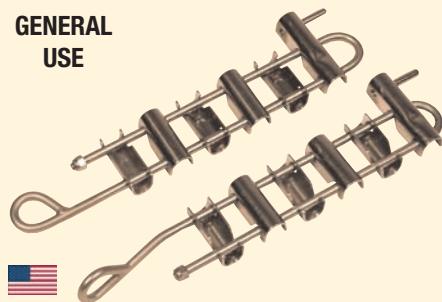

CMI NFPA Rappel Rack


With Hyperbar

Welded eye construction available in parallel or 90° to the bars. All welds are Zygo inspected to insure reliability. The rack comes pre-rigged with six angle slotted Stainless Steel bars. Length: 19 1/2". Weight: 15.2 oz.

601034N	Standard	80.00
6010349N	90° Rigging Point	80.00

Meets NFPA 1983/ANSI specifications for Descenders.

CAUTION: Care must be taken when using the Steel Brake Bars to rappel, belay, or lower personnel or heavy loads. Steel does not provide as much friction as aluminum.

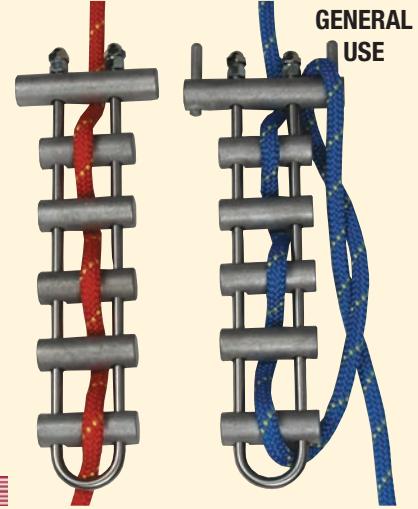

**GENERAL
USE**


RescueTECH Rescue Rack™

Superior Control of Rescue Loads

The safest, heavy duty lowering and rappelling device. Can be placed onto rope at any point. Friction may be varied by sliding easily rigged bars up or down — even while on rappel or during lowering operations. Specially designed straight cut 1" aluminum friction bars help prevent mis-rigging. Extended top bar for quick lock-off. Accommodates ropes from 1/4" to 1 1/2" or double ropes up to 3/4". One person can easily control a 1,000 lb. load. Frame manufactured of 304 stainless steel and will accommodate four 13mm carabiners. Special design of the frame distributes the load between both sides of the unit. Tensile Strength: 10,000 lbf. WLL: 1,000 lbs. Dimensions: 15" x 3". Weight: 30 oz.

601102	Standard (shown left)	60.00
601202	Hyperbar (shown right)	70.00

Meets NFPA 1983/ANSI specifications for Descenders.

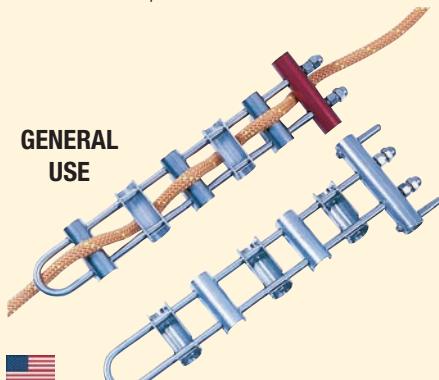

**GENERAL
USE**

CMI Rescue Rack

Oversized Aluminum Top Bar and Stainless Steel Friction Bars

3/8" diameter stainless steel frame fitted with oversized aluminum top bar and 5 stainless steel brake bars. To compensate for the reduced friction inherent in stainless steel bar, the diameter of the friction surface is a full 1". The special "open back" design of the bars help avoid improper rigging. Hyperbar model features stainless steel top bar with two lock-off pins. Length: 16" Strength: 19,000 lbf.

		Weight
601102S	Standard (shown top)	34 oz. 75.00
601111S	HyperBar	35 oz. 103.50

Meets NFPA 1983/ANSI specifications for Descenders.





Magnum Rigging Plate

Large size and 16 holes to accommodate multiple rigging needs. Manufactured of alloy aluminum. Rating: General Use.

Length:	9.75"	249 mm
Width:	5.875"	150mm
Hole size:	3/4"	19 mm
Weight:	17 oz.	471 gm
Strength:	12,365 lbf.	55 kN
WLL:	1,236 lbs.	561 kg

603216 Magnum Rigging Plate 80.00



Technical Rescue Rigging Plate

A standard size multi-hole rigging plate. Manufactured of alloy aluminum. Rating: General Use.

Length:	6.62"	165.6 mm
Width:	4.32"	108 mm
Hole size:	3/4"	19 mm
Weight:	9.4 oz.	262 gm
Strength:	12,365 lbf.	55 kN
WLL:	1,236 lbs.	561 kg

603215 Technical Rigging Plate 44.00



Stainless Steel Rigging Plate

Heavy Duty / Lightweight

Designed to compliment your existing rigging equipment. Lightweight, strong and effective. Allows rigging team to set up more efficient anchor systems. Prevents carabiners from jamming together. Machined from stainless steel. Dimensions: 5" x 5". Weight: 8.6 oz. Strength: 13,000 lbf. WLL: 1300 lbs. Rating: General Use.

603211 Stainless Steel 61.70



Beam Clamp

Designed as a high strength portable rigging point for both horizontal and vertical I-Beam structures. The turnbuckle type threaded mechanism allows quick attachment to 3" - 9" flange widths. Every unit is tested and certified before shipment.

	Standard Duty	Heavy Duty
WLL, Personnel:	1,000 lbs.	2,000 lbs.
WLL, Equipment:	2,000 lbs.	4,000 lbs.
Weight:	10 lbs.	11 lbs.
Rating:	General	General

603411 Standard 85.00
603412 Heavy Duty 90.00



Micro Rigging Plate

The smallest rigging plate in the Rescue Technology line. Made from 1/4" alloy aluminum plate, the Micro Rigging Plate is both strong and lightweight. Ideal for Search and Rescue, Climbing, and Litter Bridles. Dimensions: 3.5" x 3.25". Hole size: 13/16". Strength: 35kN (7,800 lbf.)

603214 Micro Rigging Plate 26.25



Rigging Rings

Traditional forged rings to be used as rigging rings, connection points for rigging a stretcher, and many other uses. Drop forged alloy steel. Inside Diameter: 3 inches. Rating: General Use.

Description	Strength (lbf.)	Wgt (oz.)	
		603230	603240
1/2" Ring	10,000	9.7	9.50
9/16" Ring	44,000	12.5	12.00




WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



Remote Retrieval Hook

Hold-Tite Pole Adapter Holds Hook

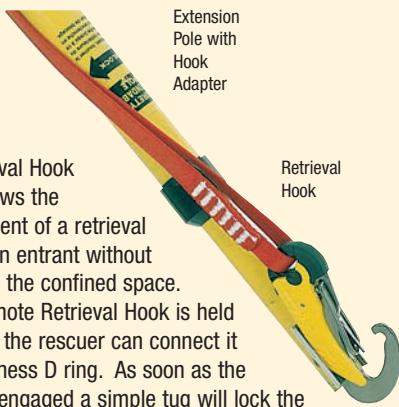

A Retrieval Hook that allows the attachment of a retrieval line to an entrant without entering the confined space. The Remote Retrieval Hook is held open so the rescuer can connect it to a harness D ring. As soon as the snap is engaged a simple tug will lock the Hook to the harness. Sling may be attached to end of retrieval line for victim rescue. Comes complete with auto-locking snap and nylon sling. Extension Pole with Hook Adapter sold separately. Hook Materials: Stainless Steel w/ protective plastic shroud. Gate Opening: .75" Hook Strength: 5,000 lbs. Remote Retrieval Hook and Pole sold separately

616101	Retrieval Hook w/ Sling	55.00
616112	Extension Pole, 6 - 12 ft.	70.00
616124	Extension Pole, 8 - 24 ft.	95.00
616200	Storage Bag, 6 - 12' Pole	30.00
616210	Storage Bag, 8 - 24' Pole	35.00



CMI Drag Hook

Manufactured of forged steel eyebolt and five 4140 chromemoly steel tines. Each tine is heat treated to resist a load of approximately 2,000 lbf. Each Drag Hook is sandblasted and coated with baked-on epoxy coating. Available Deployment Bag is specifically designed for use with the Drag Hook. Dimensions: 12" x 8.5". Weight: 3 lbs. Color: Black.

624100	Drag Hook	130.00
624105	Deployment Bag	33.00



Forged Anchorage Connector I With Threaded Stud

Drop forged alloy steel. Meets or exceeds ANSI Z359.1 and CSA Z259.12-00. Complete with grade 9 nut and lock washer. Recommended torque value: 45 - 55 ft-lbs. Bolt diameter: 1/2"

603105 Anchor Connector I 29.00



Forged Anchorage Connector II For 1/2" or 5/8" Bolts

Drop forged alloy steel. Meets or exceeds ANSI Z359.1 and CSA Z259.12-00. Use minimum grade 8 bolt and nut with lock washer. Select 1/2" or 5/8" bolt models. Bolt Length: 1.5". Recommended Torque Values: 1/2" 13 TPI bolt: 65 - 75 ft lbs.; 5/8" 11 TPI Bolt: 145 - 155 ft-lbs.

603108 For 1/2" x 13 TPI Bolt 28.00
603109 For 5/8" x 11 TPI Bolt 29.00



ISC Girder Grip For Steel Work

Anchor designed to provide secure anchor points through steel structure. Fits hole size: 19 - 28mm. Manufactured of high tensile strength steel and aluminum. Minimum strength: 6,000 lbf.

603110 Girder Grip 137.00



Snow/Sand Picket

Custom "Anchor" shaped structural aluminum alloy pickets in two lengths. Multiple rigging holes for ease of use. No sharp edges. Powder coated for durable good looks.

603136 36" Picket 25.00



Actuated Girder Grip ready for insertion



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



2:1 Pick Off Strap

Built-in Mechanical Advantage

Used for patient pick-off situations. Configuration allows for 2:1 and 3:1 mechanical advantage for easier handling of loads. Materials: 1 3/4" Heavy Duty TECHWeb webbing with Forged D-Ring and Adjuster Buckles. Strength: 7,000 lbf.

756104 2:1 Pickoff Strap 32.00



Heavy Duty Load Release Strap

The Load Release Strap uses 10,000 lbf. rigging "D" Rings and a standard 1.75" forged "D" on the adjustment part. 10,000 lbf TECHWeb is used to provide superior strength over units using type 13 webbing. Designed to prevent the adjustment end of the webbing from sliding through the rigging "D" rings.

756202 36.00



Transfer Sling

Ideal for Rescue Pick-Off

Manufactured with heavy duty TECHWeb 1 3/4" flat webbing and has a forged "D" ring sewn in one end and an adjustable "V" ring on the other end. Adjusts by pulling on the hand loop. The "V" ring adjuster buckle slips at 4,500 lbf. Hardware Proof Load: 2,500 lbf. Weight: 12 oz. Length: 10 - 54" Rating: General Use.

756103 Transfer Sling 30.00



Adjustable Rigging Sling

With Heavy Duty TECHWeb

An adjustable length rigging sling. Manufactured of heavy duty TECHWeb 1 3/4" flat webbing and has a forged "D" ring at each end. Adjusts with a slide adjuster. Webbing Strength: 10,000 lbf. Tensile Strength: 8,000 lbf. WLL: 800 lbs. Length: Adjustable 5 - 9 ft. Weight: 10 oz. Color: Gold.

756106 Adjustable, 2- 6 ft. 40.00

756105 Adjustable, 5- 9 ft. 42.00

Eye Sling™

Unique Loop Sling with Rigging Eye

Specially constructed loop sling with a rigging eye at one end. Strength: 6745 lbf. WLL: 675 lbs.

2389201 24" 16.50

2389203 48" 22.75

2389204 60" 25.00

Meets CE, EN 354, ED 795B

TECHNote™

Sling and Lanyard labeling

Rescue Technology labels all of our Rescue Slings and Lanyards with recommended Working Load Limits. Where applicable, the WLL is illustrated for a variety of rigging uses. Since the label states specific limits, rescuers don't have to calculate load limits during the rescue. For Quality Control purposes, the labeling also specifies part number, Production Lot Number and Production date. This information lets us track all aspects of the production of the equipment.

RESCUE TECHNOLOGY 770-832-9694 FAX (770)832-1676

Maximum Working Load Limit for NEW sling *WARNING* DO NOT EXCEED

WWL	Vertical lbs.	Choker lbs.	90° Basket lbs.	60° Basket lbs.
@ 10:1				
Part No.	Length ft.	Lot	Date	

WARNING: Exceeding Working Load Limit can result in loss of load, serious injury, or death. Do NOT expose to temperatures above 250°. Do NOT use unless properly trained. INSPECT BEFORE EACH USE!! Meets ANSI/OSHA/NFPA





Heavy Duty Anchor Sling

Strongest 1" Heavy Duty Double End Rigging Sling

Eliminates wasted rigging time spent tying knots in rigging lines. Made from 1" solid weave, high strength nylon webbing. The special webbing has RED tracers to indicate cuts in the webbing. Available in multiple lengths, each sling has a sewn loop at each end to provide maximum versatility. Anchor points may be wrapped single, double, triple, etc., to suit particular rescue situations. Anchor Slings exceed all standards and regulations for Light Use Life Support lines. When looped like a basket hitch, anchor slings meet General Use load requirements. Tensile Strength: 8,500 lbf. WLL: 850 lbs. Color: Yellow.

7550032	3 ft.	11.50
7550042	4 ft.	12.00
7550052	5 ft.	12.50
7550062	6 ft.	13.50
7550082	8 ft.	14.50
7550102	10 ft.	15.50



Super Duty Anchor Sling

Strongest Webbing Slings in the Rescue Industry

Manufactured from 2" wide solid weave high strength webbing. Special RED internal tracers function as edge cut indicators that are exposed when the webbing edge is abraded, cut, or torn. Large heavy duty forged steel links on each end will allow end-to-end, basket, and choker use of the sling. Exceed all standards for two person lifeline strengths. Tensile Strength: 15,000 lbf. WLL: 1,500 lbs. Color: Yellow. Rating: General Use.

756504	4 ft.	38.00
756506	6 ft.	40.00
756508	8 ft.	42.00
756510	10 ft.	44.00



Heavy Duty Anchor Sling w/ "D" Ring

Made with TECHWeb

Manufactured from heavy duty TECHWeb flat webbing (Tensile Strength: 10,000 lbf.). Each sling has a "D" ring (proof Load: 5,000 lbf.) sewn at each end to provide maximum versatility. Anchor points may be wrapped single, double, triple, and rigged choker-style to suit particular rescue situations. When looped like a basket hitch, anchor slings meet General Use load requirements. Although webbing tensile strength is high, overall tensile strength is limited by the "D" rings. Tensile Strength: 8,000 lbf. WLL: 800 lbs. Color: Yellow.

7591032	3 ft.	20.00
7591042	4 ft.	21.00
7591052	5 ft.	22.00
7591062	6 ft.	23.00
7591082	8 ft.	24.50
7591102	10 ft.	26.50
7591152	15 ft.	32.00



Heavy Duty Anchor Loop

Heavy Duty Continuous Loop

Constructed of same heavy duty webbing as the Anchor Sling. This unit is sewn to form a continuous high strength rigging loop. Items are sold by linear measurement of the loop laid flat. Anchor Loops meet all standards and regulations for two-person life support lines. Tensile Strength: 13,000 lbf. WLL: 1,300 lbs. Color: Yellow. Rating: General Use.


7540042	4 ft.	13.00
7540062	6 ft.	15.00
7540082	8 ft.	17.00
7540102	10 ft.	19.50



Steel Cable Sling

The highest quality life support slings made from flexible 3/8" steel cable. Manufactured with Flemish eye splices with steel swages per OSHA/ANSI standards. Each unit is tagged with date of manufacture, size, and working load in tons. Steel slings are excellent in areas of extreme high/low temperatures, chemical exposure, and abrasion. Proof Tested: 5,400 lbf. WLL: 2,700 lbf. Rating: General Use.

759304	4 ft.	15.00
759306	6 ft.	19.00
759310	10 ft.	25.00
759315	15 ft.	38.00

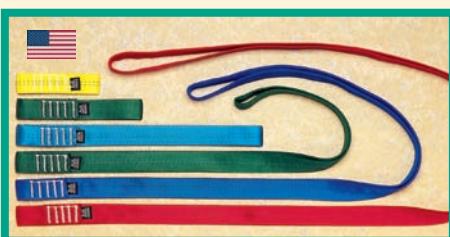

Standard Rescue Loop

High Strength Continuous Loop

High strength 1" Tubular Webbing (4,500 lbf.) provides a high strength loop. Because of the high strength and abrasion resistance of the Rescue-Spec™ Tubular webbing RescueTECH Standard Rescue Loops will outlast conventional tubular webbing slings. Strength: 7,400 lbf. WLL: 740 lbs. Colors: Assorted.

7612012	12 in.	4.00
7612024	24 in.	6.00
7612036	36 in.	7.00
7612048	48 in.	8.00
7612060	60 in.	8.50



RescueTECH Webbing

RescueTECH Rescue-Spec Tubular webbing is specially designed for the demands of rescue by exceeding the strength specifications of normal mil-spec webbing. Additionally, it will outwear any comparably sized tubular webbing. Special Lock-Stitch is used to make RescueTECH tubular webbing superior all other tubular webbings - even mil-spec.

For heavy duty rigging conditions, we recommend the use of our Rescue Technology Heavy Duty Flat Webbing. The Heavy Duty Webbing is more abrasion resistant than standard 1" tubular.



TUBULAR		ft.	50 ft.	150 ft.	300 ft.
7900	9/16"	0.28			79.00
7901	1"	0.34	16.00		90.00
7902	2"	0.65		90.00	
FLAT		ft.	50 ft.	150 ft.	300 ft.
7945	1"	0.36	20.00	57.00	
7921	1 3/4"	0.60		85.00	
7932	2"	0.50		70.00	

Width	Style / Type	Strength	Colors Available
9/16"	Rescue-Spec Tubular	2,299 lbf.	Black, Red, Royal Blue, Teal
	Rescue-Spec Tubular	4,200 lbf.	Black, Blue, Green, Orange, Red, Yellow, Purple, Tan
	Rescue-Spec Tubular	6,800 lbf.	Black, Blue, Red, Yellow
Width	Strength	Colors Available	
1"	Heavy Duty Flat	6,000 lbf.	Black, Blue, Green, Orange, Red, Yellow
1 3/4"	Heavy Duty Flat	6,000 lbf.	Black
2"	Seat Belt Type Flat	6,000 lbf.	Black



Screamer Load Limiter

Multi-functional energy absorbing device. Exceptionally good for use in anchor point protection in any raising or lowering system. The load limiters not only absorb energy when a system is overloaded but they act as a very reliable rescue system overload indicator. The load limiters can be "ganged" to accommodate various activation forces (550, 950, 1200 lbf.). Activation point is consistently repeatable to +/- 7%. Activation Point: 550 lbs Standard. Weight: 2 oz.

753400 Standard Duty 12.60



TECHNote™

RESCUE-SPEC WEBBING OUTPERFORMS MIL-SPEC WEBBING



RescueTECH 1" Tubular outlasts other types of 1" Tubular. RescueTECH webbing is stronger (4,300 lbf. vs. 4,000 lbf.), more durable (94% greater abrasion resistance), and exceeds MIL-SPEC 4088, Class 1A.

RescueTECH webbing also has greater strength in knots than mil-spec webbing. Strength tests show that RescueTECH webbing tested at over 7,000 lbf. in a loop joined with a "water knot". Mil-spec webbing tested at just over 5,400 lbf.

Meets all ANSI, OSHA standards and CSA construction requirements.



RT Daisy Chain

Strong Rigging Loops

Traditional multiple loop rigging sling with "directional" rigging loops for higher strength. Made from 1" Tubular Webbing. Loop strength of 1,500 lbf exceeds that of competing multi-loop straps. Ultimate Strength: 6,800 lbs. Specify Color: 36" Black or Red (9 pockets); 60" Black or Blue (17 pockets).



7581361	Medium, 36" (BK)	16.00
7581364	Medium, 36" (RD)	16.00
7581601	Large, 60" (BK)	21.00
7581606	Large, 60" (BL)	21.00



Multi-Purpose Rescue Strap

15' strap with forged adjuster buckle. Multiple uses: emergency harness, litter strap, rigging sling. Webbing Strength: 6,000 lbf. Buckle Proof Load: 2,500 lbf. WLL: 600 lbs. Weight: 10 oz. Color: Black.

756128	Multi-Purpose Strap	23.50
--------	---------------------	-------



Deluxe Webbing Ladder

Multi-Unit Connectability


The Deluxe Webbing Ladder offers the features of our traditional 1" Webbing Ladder plus the ability to connect multiple units together. Built in spreader and individual semi-rigid stays keeps the steps open without causing "foot pinching".

Multiple ladders may be linked together. 16 steps.

WLL-Step: 300 lbs.
WLL-Unit: 600 lbs.



758625 15 ft. 115.00

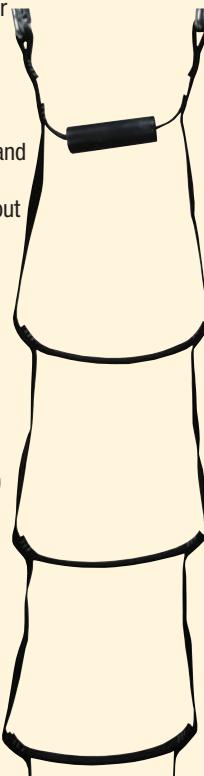

RT Rescue Etrier

A great help in rescue. Can be used as a simple step-up or at the breakover by safety personnel. Constructed of 1" flat webbing with a protective sheath at the carabiner rigging point for extra abrasion resistance. Double thickness of webbing keep steps open and hand loop at top. Tensile Strength: 5,000 lbf.



758341	4 Step, Black	25.00
758342	4 Step, Yellow	25.00
758345	4 Step, Green	25.00
758361	6 Step, Black	29.00
758364	6 Step, Red	29.00
758366	6 Step, Blue	29.00




Webbing Ladder

The Webbing Ladder offers the simplicity of a traditional 1" etrier but with increased comfort. Built in spreader and individual stays in the steps insures that steps remain open without causing "foot pinching". Built-in wrist loop. 6 steps.

WLL-Step: 300 lbs.
WLL-Unit: 600 lbs.



758621 6 ft. 38.00

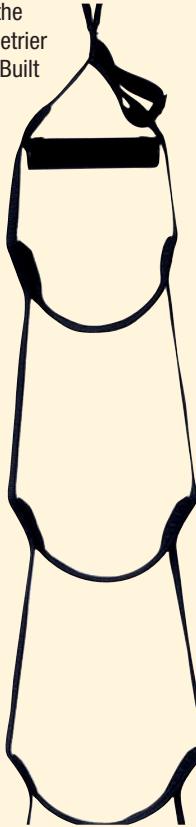

RT Deluxe Rescue Etrier

With Attached Rigging Sling

A modified version of our popular 4 Step Rescue Etrier. We have attached a 24" length of versatile RT Daisy Chain Webbing. Tensile Strength: 5,000 lbf.




758542 Yellow 36.00
758545 Green 36.00



WARNING


Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.

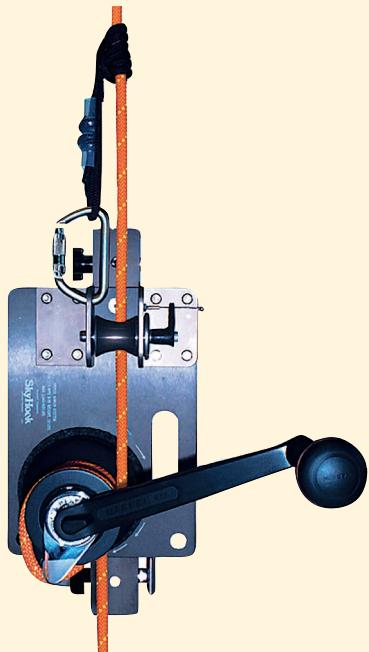

SkyHook Rescue Winch

The SkyHook system is comprised of an anodized aluminum two-speed self-tailing winch, handle, and mounting system. Will connect to the Sked Evac or Sure-Strong Tripods. Offers ease of raising & hauling loads without the use of bulky block & tackle-style mechanical advantage systems. Best used with 1/2" ropes. Weight 21.5 lbs.

615201 SkyHook Rescue Winch 2,700.00

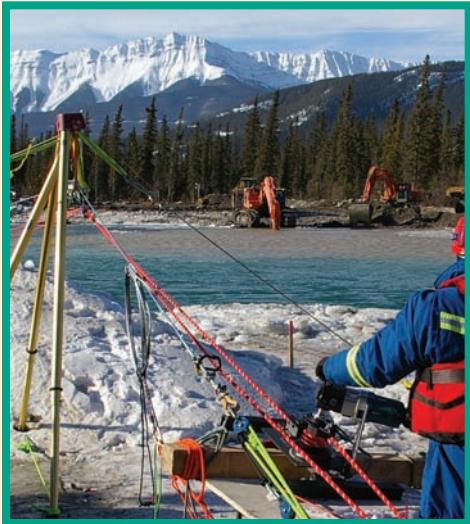

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



SkyHook Receiver Hitch Mount

Allows the SkyHook winch to be mounted to a vehicle using a standard receiver hitch. The mount will pivot up to 45° in each horizontal direction to achieve proper rigging alignment.

615202 Receiver Hitch Mount 530.00



SkyHook Power Drive

An electric powered power head turns the winch head. Includes Power Drive, stainless steel drive bit, attachment bracket, and storage box. 110 VAC. Weight: 15.5 lbs. (With case: 21.2)

615210 Skyhook Power Drive 875.00



SkyHook "T" Off-Road Foundation

This attachment gives the winch a large base for ground operations. Weight: 4.8

615204 Ground Stabilizing Mount 225.00



SkyHook Universal Anchor Plate

Provides the winch a stable work platform for anchoring the winch to the ground, telephone poles, etc. Weight: 9.7 lbs.

615205 Universal Anchor Plate 318.00



SkyHook Case

Holds winch and winch drive system as well as Universal Anchor Plate.

615209 Skyhook Case 700.00



Skyhook Web Anchors

The Skyhook Web Anchor Set allows rescuers to quickly attach the Skyhook winch around a column, tree, abutment, etc. Very useful in Industrial and rural applications. Strong ratchet adjusters provide a tight and secure attachment.

615206 95.00

Original Arizona Vortex

Kit Includes Feet

The Arizona Vortex is a fixed A-frame design with third rotating (easel type) leg. It can be used as a tripod or A-frame. The two-piece legs allow multiple adjustment of upper leg in 6.5" increments. The single section Short Tripod configuration as an inside working clearance of 41". The two-section Standard Tripod has an inside working clearance of 80". With the optional Extra Lower Leg Set, the inside working clearance is 120". The feet are "clawed" with hardened tool steel for excellent holding capability on a variety of surfaces.

Optional Chain Set allows legs to be attached to bolts in floor or rock and

prevents legs from spreading. The Arizona Vortex is packaged in custom designed duffel bags for ease of transport. Weight: 65 lbs.



6198101	Arizona Vortex	3,550.00
6198104	Anchor Chain Set	85.00
6198103	Extra Lower Leg Set	225.00
2317101	Extra Claw Foot	190.00
2317103	Extra Point for Claw Foot	16.00
2317105	Extra Flat Foot	135.00



Head allows third leg to rotate perpendicular to the other legs

The Original Arizona Vortex includes:


- 1 Head with Carrying Bag
- 3 Upper Legs with Carrying Bag
- 4 Lower Legs with Carrying Bag
- 3 Flat Feet
- 3 Claw Feet with Tips
- 13 Pins with Bag
- 1 Instruction Manual



Larkin Rescue Frame

An uneven tetrahedron that can replace a tripod or a small rooftop derrick crane for personnel lifting/lowering. The Larkin Frame swivels on its feet and can be set up as a standard tripod or tipped as shown in the photo to reach over an edge or parapet wall. It is especially useful on horizontal tanks with half walkways. The two feet must be secured to prevent slippage away from the breakover when the unit is tipped. Safe Working Load: 600 lbs. Dimensions: 8' x 10'. Weight: 75 lbs. (Shipping Weight: 80 lbs.) Made in Australia. Patented

900200 Larkin Frame **3,700.00**

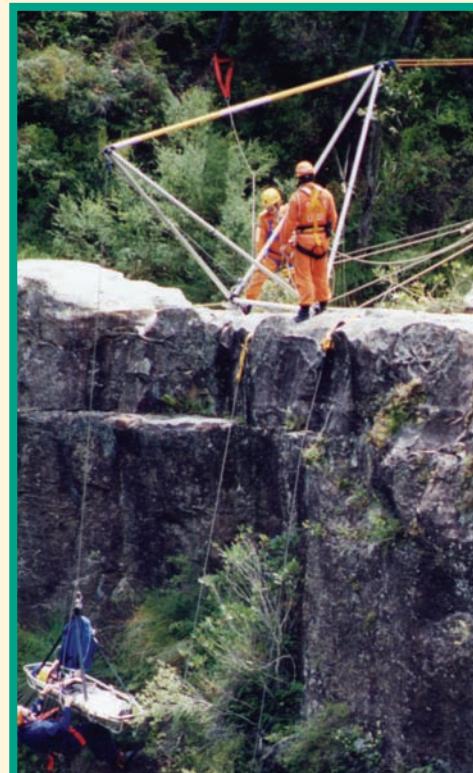

INCLUDED:
Raptor Claw
Foot digs into
rock using tool
steel point.





Requires Cable Pulley and Autolocking Carabiner

**Sure-Strong™ Winch**

The Sure-Strong™ Winch is used in conjunction with the fall protection system and Sure-Strong Tripod for suspended work positioning, material handling, and as a means of retrieval in an emergency. If the winch is used to lower personnel into a confined space, a backup lifeline must also be attached to the person. The winch comes with a snap-on mounting bracket and attached locking pin. Raises and lowers (minimum 25 lbs.) by simply reversing the cranking direction of the removable handle. Each winch comes with a line weight and double locking swivel hook. Cable: 3/16" galvanized. Rescue Load: 600 lbs.

		Gear Ratio	Weight
6197050	50 ft.	2.85:1	22 lbs. 900.00
6197200	200 ft.	3.83:1	54 lbs. 1,400.00
6102118	S. S. Pulley (requires carabiner)		45.00
60511730	Autolocking Carabiner		21.00
61945059	Padded Winch Bag		60.00



Sure-Strong Tripod with Optional Winch, Pulley.

Sure-Strong™ Tripod**High Strength for 2 Person Loads**

Lightweight, aluminum, telescoping tripod that meets NFPA, OSHA, ANSI, and CSA strength standards. The unit contains no cast parts and has two anchor points for application flexibility. Special locking mechanism prevents the legs from collapsing while loaded. The included leg security straps increase the tripods full extension strength to an amazing 10,000 lbf. Optional Rigging Bracket provides extra rigging point and allows user to tie-back head of tripod for use as a bipod. The hole alignment of the legs provides for easy set-up and accommodates the snap-on brackets of the Sure-Strong Winch and recovery/retracting lifelines. Baked orange enamel finish.

6191007	7 ft. Heavy Duty	1,300.00
6191010	10 ft. Heavy Duty	1,500.00
6191107	Bag, 7 ft. Tripod	70.00
6191110	Bag, 10 ft. Tripod	85.00

Meets and exceeds ANSI Z359.1- 1992
Certified by independent engineering firm and CSA.

SPECIFICATIONS	7 ft.	10 ft.
Minimum Static Test Load	11,000 lbf.	11,000 lbf.
Working Load Limit	1,100 lbs.	1,100 lbs.
Rigging Height	7'	10'
Overall Height	7' 6"	11' 1"
Storage Length	61"	102"
Max. Distance between Feet	66.5"	96.5"
Weight	42 lbs.	67 lbs.
Rating, NFPA	General	General
Rating, OSHA	2 Person	2 Person



Carabiner & tripod not included

Leg Rigging Bracket

Special bracket that provides an additional rigging point for safety lines or pulleys. Also designed for use as a tie-back point for stabilizing the tripod when off-center loads are encountered. Alloy aluminum construction. WLL: 600 lbs. Weight: 25.8 oz.

6192107	Leg Rigging Bracket	105.00
---------	---------------------	--------

**Retracting / Recovery
3-Way' Lifeline****For Use with Sure-Strong Tripod**

The Retracting/Recovery Lifeline is designed to safely arrest a fall and then, by simply switching to the recovery mode, retrieve the worker. The Retracting/Recovery provides the same benefits and capabilities as the Retracting Lifeline. The Retracting / Recovery "3-Way" lifeline is a fall protection device with a built-in emergency recovery winch. A separate work winch is required for non-emergency lifting. Requires Mounting Bracket to attach to Sure-Strong Tripod leg.

	Weight
618050	50 ft. Cable
618095	95 ft. Cable
618050M	Mounting Bracket, 50 ft.
618095M	Mounting Bracket, 95 ft.

Meets ANSI Z359.1-1992, CSA Z259.2.




RescueTECH Technician Tripod

2 Swivelling Rigging points. Spring loaded leg locking mechanisms hold legs in place. Sheaves on head of tripod allow for integration of winches and fall blocks while allowing for increased height under the tripod head. Extruded head and snap out legs for quick and positive deployment. Available with optional load indicating attachment eyes. Manufactured from high strength alloy aluminum and stainless steel fittings.

MBS: 10,000 lbf.
Working Load Limit: 600 lbs.
Dimensions:
Maximum Open Height: 99.6"
Minimum Open Height: 70"
Storage Dimensions: 72" x 8.5" x 8.5"
Weight: 38.5 lbs.

6194101	Tripod	1,100.00
6194109	Tripod Bag	90.00
61945050	Winch, 50 ft.	1,075.00
61945100	Winch, 100 ft.	1,250.00
61945059	Padded Winch Bag	60.00

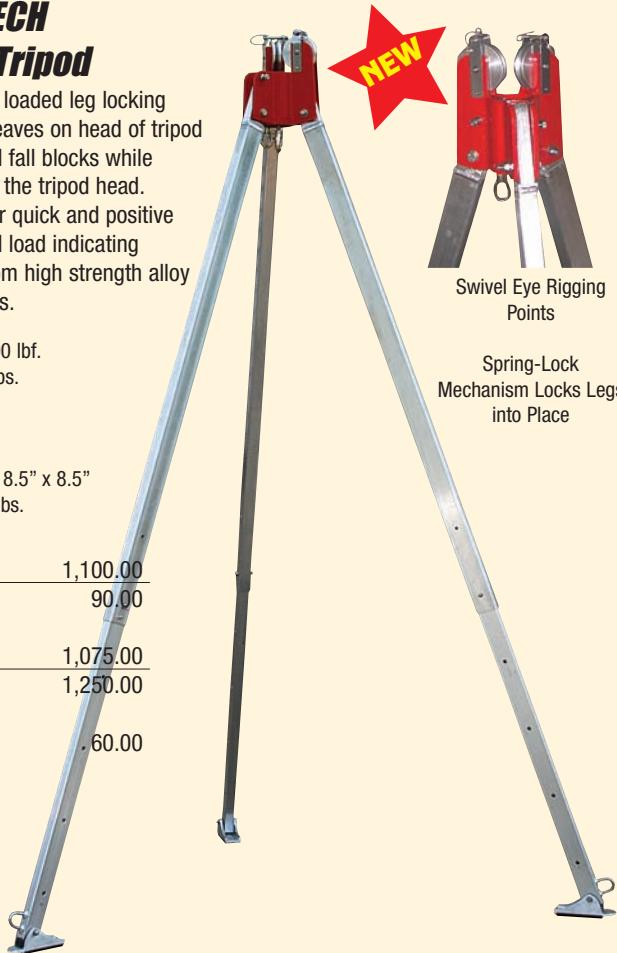

Fall Protection Lifeline with Recovery Winch

3-Way Lifeline

Tough Aluminum housing with 3/16" galvanized steel cable with a load-indicating Autolocking Swivel Snap. Working load: 660 lbf. Meets ANSI Z359.1 and CE BS EN 360 requirements. Electrostatic powder painted. 100% inspected. Unit can be reset from winch mode back to fall protection mode. Attaches to the Technician Tripod with Mounting Bracket.

61943050	3 Way x 50 ft. (shown)	1,450.00
61943059	Tripod Mounting Bracket	165.00



Fall Protection Lifeline

Great Fall Protection Block for worker and rescuer protection. Meets ANSI and CE Personal Protection Equipment standards.


61942050	Fall Block x 50 ft.	1,000.00
60511730	Autolocking Carabiner	22.00



Sked Evac Tripod

The Sked Evac Tripod extends to 9.9 feet with three anchors at the head. Anchors, Header, and Legs are interconnected with 1/2" Stainless Steel bolts for high strength. At full extension (119") proof load is 5,280 lbf.. At 98" strength is 9,500 lbf.. Legs adjustable in 5" increments. WLL at 9 ft.: 528 lbs. WLL at 6 ft.: 950 lbs. NFPA Rating: Light Use. OSHA Rating: 1 person. Bag Dimensions: 89" x 6" x 6".

620510	Evac Tripod	1235.00
620511	Carrying Bag for Evac Tripod	95.00

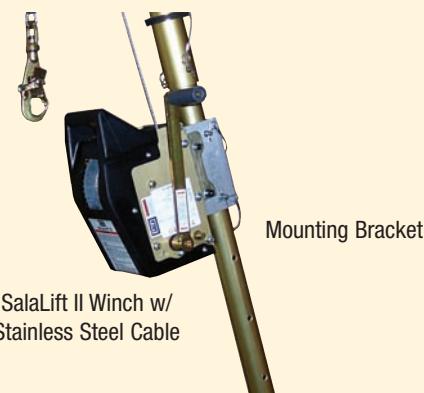

620515	Retracting Lifeline, 50'	3,100.00
620516	SalaLift, 60' (1/4" Cable)	1,425.00
620517	SalaLift II, 90' (3/16" Cable)	1,450.00
620518	SalaLift II, 120' (3/16" Cable)	1,500.00
620519	Mounting Bracket*	125.00
6102118	Cable Pulley*	45.00
60511730	AutoLocking Carabiner*	22.00

*Required for use of Tripod with Winch or Retracting Lifeline





Webbing Lanyards

Manufactured from heavy duty 1" wide nylon webbing and two double locking snaps at each end. Minimum Tensile Strength: 5,000 lbf. New labeling and easier to use autolocking snap.

752042	2 ft. Lanyard	25.00
752043	3 ft. Lanyard	26.00
752044	4 ft. Lanyard	27.00
752046	6 ft. Lanyard	28.00

Meets all ANSI, OSHA standards and CSA construction requirements.



Webbing Lanyards with Ladder Hook

Manufactured from heavy duty 1" wide nylon webbing with a double locking snap at one end and a double locking ladder hook (2.5" gate opening) at the other end. Minimum Tensile Strength: 5,000 lbf. Now available with integral shock absorber (Zorber™). New labeling.

752056	6 ft., Snap / Hook (shown)	65.00
752348	3-6 ft., Adjustable, Snap / Hook	65.00



Webbing Lanyards with Shock Absorber

Lanyards that combine special shock absorber with one of the strongest webbings (10,000 lbf.) available. Webbing features cut indicators on each edge.

753574	4 ft.	60.00
753576	6 ft.	62.00
752346	3 - 6 ft., Adjustable	40.00

Meets all ANSI, OSHA standards and CSA construction requirements



Twin Leg Tower Lanyard, AutoLock


Twin Leg Tower Lanyards

100% Tie Off

Special design Lanyard with Zorber to be used for 100% tie-off method of climbing safety. One end has a double-locking safety snap or rapid link that attaches to harnesses. The "Legs" of the lanyard are complete with large 2.50" opening double locking Ladder Hooks.

752265	AutoLock, Steel	85.00
752265A	Aluminum Autolock, Aluminum	125.00
752275	Aluminum with Rapid Link	90.00
752264	AutoLock with Shock Absorber	135.00

Meets all ANSI, OSHA standards and CSA construction requirements.

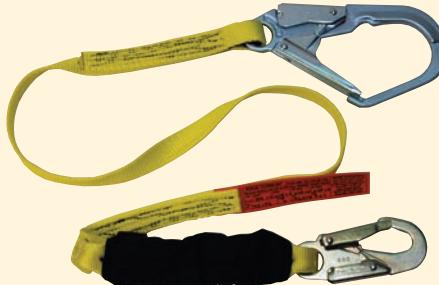

Shock Absorbing Lanyards with Ladder Hook

Manufactured from heavy duty 1" wide nylon webbing with a double locking snap at one end and a double locking ladder hook (2.5" gate opening) at the other end. Minimum Tensile Strength: 5,000 lbf. Manufactured with integral shock absorber (Zorber™).

752156	6 ft., Snap / Hook / Zorber	100.00
--------	-----------------------------	--------

Meets all ANSI, OSHA standards and CSA construction requirements.



Adjustable Tower Strap w/ Shock Absorber

Ideal for Tower/Ladder operations.

The Tower Strap allows the firefighter enough length to complete ventilation or perform window rescues while remaining secured to the bucket or ladder. Used in conjunction with the Truck / Escape Belt or Ladderman's Class II Harness. Adjusts from 4 - 6 ft. and equipped with autolocking snap and ladder hook. Integral Zorber shock absorber limits forces in case of fall. Notice: This product must be protected from temperatures above 250 degrees fahrenheit and direct flame impingement. (Use Fire Resistant Truck Lanyard if in doubt of heat resistant needs)

609015	Adjustable Tower Strap	92.00
--------	------------------------	-------



SITE

Work Positioning Lanyard

The work positioning lanyard with great handling makes your work safe and efficient. 11mm rope sewn-in unopenable version of LOCKER - rope clamp. Rope covered with tubular webbing to increase wear resistance. Parking cam for locking in required position.

238910112 78 inch 155.00

238910114 157 inch 175.00



Lanyard "I"

Made from super-durable 11mm kernmantle rope. Ideal for rope access technicians. Lengths are color-coded at the ends.

23892110060 24 inch 25.00

23892120080 32 inch 27.00



Retracting Lanyard

The retracting lanyard is designed to protect personnel working at high levels from falling. The user is attached to the tensioned synthetic webbing enclosed in the drum housing that is attached to an approved anchorage point*. The webbing retracts automatically providing the worker freedom of movement. Should the worker fall, the inertia locking system engages to arrest the fall.



Weight

616007 10 ft. Lanyard 42 oz. 154.92

Certified CSA X259.2-M Type 1, Class C.

*Anchorage point must be above connection point on users belt or harness.



Reactor "Y"

Ideal for Rope Access

A Twin-Leg static kernmantle rope lanyard with an integrated webbing shock absorber. 1000 lbf. maximum impact force. Complete with Ladder Hooks with 2.25" gate opening. 500 activation force. Minimum breaking strength: 3375 lbf..

2389441155 Reactor "Y", 62 in. 175.00




2389422155 Reactor "I", 62 in.

85.00



Access Lanyard "V"

Tested to EN 354 standard for lanyards. It is used for working at height, especially for self-protection when moving from one place to another. The middle loop is attached to the harness with carabiners and energy-absorbing device. Shrink tubing protects each seam. Lanyard V has to be used as a component of a fall arrest system.

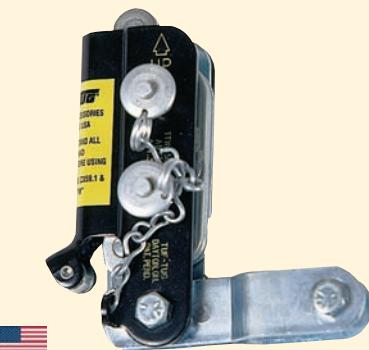

Steel Cable Grab

Only For Use on 3/8" Steel Cable

Designed for use on 3/8" diameter steel cable. Manufactured from steel for durability. Can be attached and removed from the cable at any point. Slight spring tension keeps the unit in the locked position unless upward pressure is applied to the pivot arm. Exceeds applicable OSHA/ANSI regulations. Weight: 34 oz.

602700 Steel Cable Grab 150.00

Reactor "I"

A Single Leg static kernmantle rope lanyard with an integrated webbing shock absorber. Complete with 1 autolocking lanyard hook. 1000 lbf. maximum impact force. 500 activation force. Minimum breaking strength: 3375 lbf..



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.





RT Extra-Wide Stokes

For those special rescues where the basic sized stretcher will not work. 32" wide at the rail and lined with our 0.25" diamond pattern durathene mesh. Included 4 rescue-grade patient straps*. Dimensions: 85" x 32" x 8". Weight: 33 lbs.

620125 750.00

*does not replace proper patient packaging using backboard, cervical collar, and headblocks.



Lexan Cover



Confined Space Stokes Stretcher

An updated version of the traditional wire mesh stretcher. This version features our popular 0.25" durathene mesh insert and rescue-grade straps. Tested to 1500 lbs. Dimensions: 81 1/2" x 18 3/8" x 7 3/4". Weight: 23 lbs. Shipped via motor freight.

620113

299.00

*does not replace proper patient packaging using backboard, cervical collar, and headblocks.



Stretcher Trailer

Aluminum Litter Trailer for litter transport. Easily disassembles for storage. Nylon Powder Coated. Sets up in approximately 3 minutes. Ground Clearance: 21". Length: 72". Width: 27" or 40". Weight: 71 lbs. Litter not included.

620350	Stretcher Trailer	1,450.00
620355	ATV Adapter Kit	525.00



ATV Adapter Kit



ATR2 Rescue Trailer

The All Terrain Res-Q 2 model was designed for those with limited storage space. The ATR2 features a fully welded chassis made from durable rectangular tubing and schedule 40 pipe with a suspension system consisting of hydraulic assist shocks and coil spring. Towable behind a ATV via the dual hitch configuration. If the ATV does not have a 1-7/8 inch ball, you just slide the hitch out and reverse it and you can attach via standard draw pin style. Standard features are: Split frame with locking pin, Dual Hitch System, 22 x 11 x 8 ATV Tires, Stainless Steel IV Pole, Standard Hubs on Axle, Dual Ratchet Style Straps for attaching stokes litters, 750# capacity coil spring, hydraulic assist shocks. Folds for storage (46" w x 36" d x 63" h). U.S. Patent: 7,131,666.



2394102	ATR2 Rescue Trailer	2,945.00	2394113	Lexan Cover	780.00
2394111	Medic Seat	375.00	2394115	Medical Tray	300.00






RescueTECH Tapered Stokes Stretcher

The RT Stretcher provides an economical choice for the rescue professional. Cold Rolled tubing and a full length steel strip backing for strength and rigidity. Shipped via motor freight.

- .25" Diamond Mesh insert
- Full length steel strips provide backboard-like rigidity*
- Rescue-Grade Patient Straps
- Electrostatic Powder Coat Finish

620112 Tapered Stokes Stretcher 299.00

*does not replace proper patient packaging using backboard, cervical collar, and headblocks.

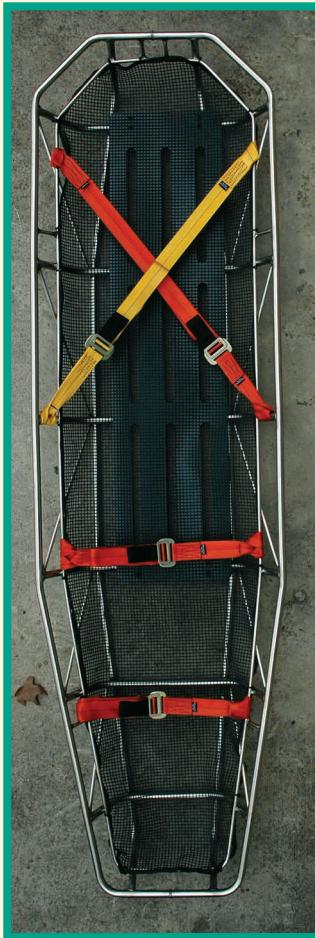

Stainless Steel Tapered Stokes Stretcher

Super Strong to meet Mil-Spec

We designed this stretcher based upon Junkin's top of the line Military Stainless Steel stretcher. This stretcher meets the Mil-Spec 2,500 lb load rating - tested from the ends of the stretcher to give a more accurate measure of strength*. We add a special Mesh insert with a .25" diamond pattern for greater strength, and better patient packaging than .5" patterns. A new style ABS back plate** provides a sturdy, yet comfortable base for the patient. We have also added rescue-grade nylon Quick-Fit Stretcher Straps for securing the patient. Shipped via motor freight.

620112 S.S. Tapered Stokes 590.00

*Other brands test from rigging points to give an artificially higher strength rating rather than the required Mil-Spec Strength rating.

**Does not replace proper patient packaging using backboard, cervical collar, and headblocks.




Rectangular Stokes Stretcher

The Rectangular Stretcher builds on our popular Tapered Stretcher design. It is designed to be symmetrical from end-to-end and to allow larger sized, rectangular backboards to easily fit inside. Cold Rolled tubing and a full length steel strip backing for strength and rigidity. Shipped via motor freight.

- .25" Diamond Mesh insert
- Full length steel strips provide backboard-like rigidity*
- Rescue-Grade Patient Straps
- Electrostatic Powder Coat Finish

620114 Rectangular Stokes Stretcher 305.00

*does not replace proper patient packaging using backboard, cervical collar, and headblocks.

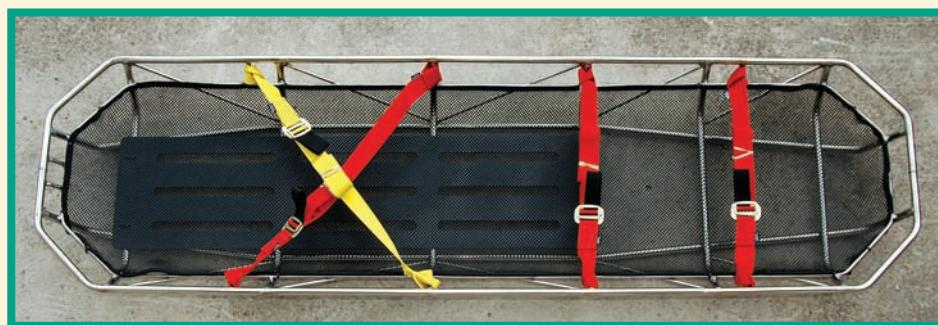

Stainless Steel Rectangular Stokes Stretcher

A stainless steel version of our Rectangular Stokes Stretcher. Includes a special Mesh insert with a .25" diamond pattern for greater strength, and better patient packaging than .5" patterns. A new style ABS back plate provides a sturdy, yet comfortable base for the patient. We have also added rescue-grade nylon Quick-Fit Stretcher Straps for securing the patient. Shipped via motor freight.

620124 S.S. Rectangular Stokes 590.00

*does not replace proper patient packaging using backboard, cervical collar, and headblocks.

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.





Mass Casualty Flexible Stretcher

Constructed of specially compounded orange or gray 18oz. vinyl-coated nylon that is easily washed with soap and water.

- Highly resistant to acids, alkalis and penetration of liquids
- Five (5) removable hardwood slats positioned between two layers of the 18oz. fabric provide strength and rigidity
- Shorter slats are placed in torso area only to make stretcher lighter and more compact
- Lightweight – 13lbs.
- Compact and portable – opens to 78”L x 28”W; closes to 35”L x 6”W
- Six (6) handles ergonomically placed for ease of transport
- Three (3) polypropylene web patient security straps for immobilization
- Load capacity – 350lbs.
- Carry bag with shoulder strap
- One person can carry up to ten (10) of these stretchers when responding to an incident

2070104 Orange 235.00
20701047 Grey 235.00



Stadium Seat

For use in fast, safe transportation of victims from stadiums, sport facilities, arenas, theaters, or anywhere multiple steps create problems in removing patients.

- Lightweight - weighs only 4.5 lbs.
- Strong - accommodates up to 350 lbs.
- Durable - made of 18oz. vinyl and hardwood slats
- Compact - folds to 20” x 7” packaged in carrying bag
- Safe - 2 nylon seat belts secures patient
- Portable - can be stored in a minimum of space
- Easy to use - 5 web handles for lifting and carrying

20700059 165.00



Stainless Steel Rectangular Litter

This new heavy duty stretcher combines the stability of the military steel wire basket stretcher with the space needed for a full size rectangular backboard. This is an extremely sturdy lightweight stretcher.

Dimensions: 84” x 23.5” x 8”. Weight: 31 lbs. Shipped via motor freight. Tested per Mil-Spec to 2,500 lbf.


620120 Stainless Steel Rectangular Stretcher (JSA-8131W-Miami) 585.00



Stainless Steel Military Litter

The stretcher used by all branches of the U.S. Military. It is a heavy duty bridge truss design of stainless steel. The wire mesh is replaceable in this stretcher. This stretcher has NO leg divider so a tapered backboard can be used. Length: 83”. Widths: 24” chest, 23” abdomen, 21” calf. Weight: 30 lbs. Shipped via motor freight. Tested per Mil-Spec to 2,500 lbf.

620121 Military (JSA-8131W) 585.00
620123 Military, 2 Piece 655.00

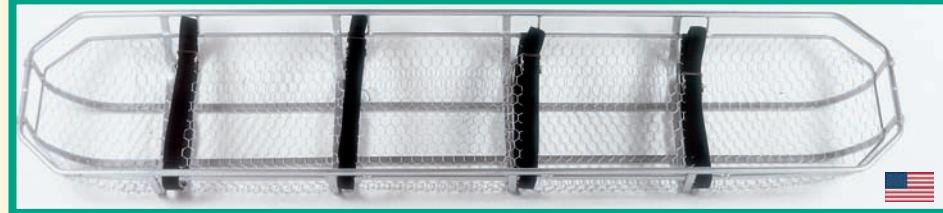

Confined Space Litter

A narrow version of the Wire Basket Stretcher. Only 19” wide and fits through nearly all accessible manholes. Used with either 4 or 6 point litter bridles. Hexagon mesh wire netting. Tested to 1500 lbs. Dimensions: 81 1/2” x 18 3/8” x 7 3/4”. Weight: 23 lbs. Shipped via motor freight.

620103 Confined Space (JSA-300CS) 306.00






3 in 1 Basket Litter

Bradco Full Body Restraint System

Designed to securely hold patients in a suspended litter bed with wrap-around slings and patient envelope. Replaceable exterior shell protects the litter frame. Excellent for sliding through brush and rocks. Tested to U.S. Army specs. Supports over 2,500 lbf. Weight 22 lbs. Dimensions: 81" x 25" x 8". Shipped via motor freight.

620105 3 in 1 Basket Litter 1,390.00

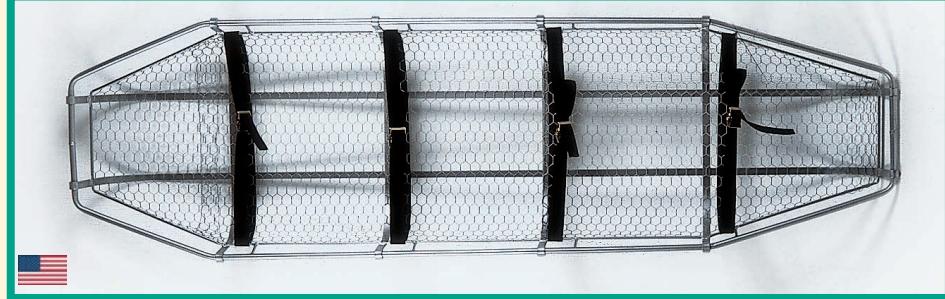

Wire Basket Stretcher

Traditional design wire basket stretcher manufactured from rugged 5/8" tubular steel frame with 3/16" x 3/4" flat wire braces. Hexagon mesh netting (18 gauge). Used with either 4 or 6 point litter bridle. Tested to 1500 lbs. Length: 80.5". Widths: 22 1/2" chest, 22" abdomen, 21.5" thigh, 20.5" calf. Height: 8". Weight: 31 lbs. Shipped via motor freight.

620101 Wire Basket Litter (JSA-300W) 255.00



Plastic Stretcher

The Plastic Stretcher combines the open top railing desirable on standard wire basket litters with the plastic bottom desired for smooth transport. Made from yellow, high density polyethylene shell, supported by a Stainless Steel outer rail. Shell is permanently attached to rail using semi-tubular Stainless Steel rivets (not pop rivets). Steel rail facilitates handling of the stretcher at all points along sides and ends of stretcher. Includes molded runners and a sealed, closed cell foam pad. The Plastic Stretcher will accept a full size rectangular backboard. Load capacity: 1,200 lbf. Dimensions: 84.5" x 24" x 7.5". Weight: 31 lbs. Color: Yellow. Shipped via motor freight.

620115 Plastic Stretcher (JSA-200) 595.00

Basket Stretcher Flotation Kit

For use with all basket stretchers to provide flotation during patient handling in water. Easily attached with hook and loop fastener to any Stokes type stretcher. Flotation bats are Dow EthaFoam and covered in Cordura™ Nylon. Kit is ready to attach to any Junkin stretcher. Weight: 3 lbs. Color: Orange.

620321 Flotation Kit 377.00



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.





Patient Stokes Harness

Special design harness that provides inside patient lashing. Designed to stay attached to stretcher then attached to patient. Complete with chest and seat harness section. Easily donned. **To be used in addition to a rescue-grade wire basket or plastic stretcher with proper technical rescue patient lashing.**

6201540 Patient Stokes Harness 110.00



and much more (not included). Come complete with carrying handle. Stretcher attachment system is complete with high strength buckles. Dimensions: 18" x 10" x 5"

620172 Stretcher Equipment Pack 51.00

Stretcher Equipment Pack

Holds all Harness and Hardware

A new equipment pack designed to hold all items needed for securing patient and stretcher movement in a vertical environment. Two zippered pockets hold webbing, hardware, litter bridles, victim harnesses,



*Manikin and Stokes not included

Quick-Fit™ Patient Packaging Set

Complete system for patient restraint in the vertical environment. Set includes Stokes Harness, Patient Lashing Set, and Stretcher Equipment pack.

299842121 250.00



Quick-Fit™ Stokes Lashing Set

Packaged set of RescueTECH's Quick-Fit Stretcher Straps. Provides rescue-grade outside lashing for the vertical environment. Complete with 4 red and 1 Yellow strap and storage pouch.

6201530 Stokes Lashing Set 87.50



Stretcher not included

Litter Cover

Protects Stretcher from the Elements

Manufactured from durable vinyl coated polyester for extra strength and durability. Double stitched seams and Vislon Zipper. Compression straps secure the bag to the stretcher. Zippered opening of 1/2 of the top panel eases insertion of the stretcher. Dimensions of 90" x 30" x 10" fits all standard and confined space stretchers.

620175 Litter Cover 135.00



Litter Transfer Sling

A handy adjustable sling that attaches to litter railing with a girth hitch. Similar in design to our standard transfer sling. V-ring adjuster attaches to rescuer. Great for litter transport. Extended Length: 40 in. Weight: 8 oz.

756111 Litter Transfer Sling 24.00



Handle Set & Stretcher not included

Mule Litter Wheel

The new Mule Litter Wheel is designed to be truly "universal", and accepts any type and style of rigid litter. The single-wheel design allows for ease of movement in the roughest terrain. Ideally suited for narrow rough trails giving the patient a smooth ride even across slopes. The two securing straps (2 hooks per strap) are each rated to 1,000 lbf. and use a strong and durable ratchet-locking device. The hooks at the end of each securing strap have a one-inch diameter opening which allows you to attach them to any style litter on the market today.

620360 Mule Litter Wheel 800.00



Emergency Blanket

Known for years as a Space Blanket, this mylar sheet works great as a thermal insulator. Small enough to fit in your shirt pocket, yet opens to a full 56" x 84" size. Stays flexible in freezing temperatures. Wind and waterproof. Weight: 1.5 oz.

2282127032 2.85



Heavy Duty Space Blanket

Lightweight Superinsulator

Reflects and retains up to 80% of radiated body heat to prevent post trauma shock resulting from an accident or natural disaster. Waterproof, windproof and durable. Multiple layers are flexible even in sub-freezing temperatures. Dimensions: 60' x 84'. Weight: 12 oz.

620165 Heavy Duty Space Blanket 17.00



Stretcher Blanket

Traditional Packaging Tool

The finest cot and stretcher blanket available for patient packaging. Provides excellent insulation characteristics. Note: Proper basket litter operations require a minimum of two blankets. 70% Wool, 30% Synthetic Fiber. Size: 82" x 62". Weight: 2.75 lbs.

620160 Stretcher Blanket 36.00





Adjustable Litter Bridle

Vertical, Horizontal, and Low Angle Lifting

Same as our original 4-Point Litter Bridle but with 1 3/4" forged adjusters. Adjusters allow for independent adjustment of the four support straps during rescue. Complete with 3" forged "O" ring and 4 locking litter snaps. Heavy Duty Version features a 30,000 lbf. lifting ring. Also available without snaps to use with heavy duty carabiners for litter attachment. Converts for low angle use. Tensile Strength: 5,000 lbf. Color: Orange with contrasting straps. We suggest the 60511820 RescueTECH Large D, Steel Carabiner. Bridle Kit includes: Bridle, Tender Rope and Carrying Bag.

Weight


620185	Bridle with Snaps	6 lbs.	180.00
620188	Bridle WITHOUT Snaps	2.3 lbs.	125.00
620189	Bridle Kit WITHOUT Snaps	5 lbs.	155.00
620189S	Bridle Kit w/ Snaps	9 lbs.	205.00



2-Piece Litter Pre-Rig

The Pre-Rig is a fully adjustable bridle intended for use with any stokes litter. The unique "Y" suspension system drastically reduces congestion at the upper attachment point. Adjustable to a minimum height of 18" above the litter for the tightest helicopter evacuations and a maximum length of 5 feet. One half of the Pre-Rig can be used as a low angle evacuation stretcher harness, eliminating the need to purchase separate harnesses. Combines with a rescuer rigging rope or Transfer Sling for a complete litter/rescuer system. Litter Pre-Rig is made of 6,500 lbf. webbing and quick adjust Mil-Spec forged hardware. Strength: 5,000 lbf. All webbing and hardware meet NFPA strength specifications. Weight: 2.75 lbs.

620183	2 Piece Litter Pre-Rig	105.00
--------	------------------------	--------

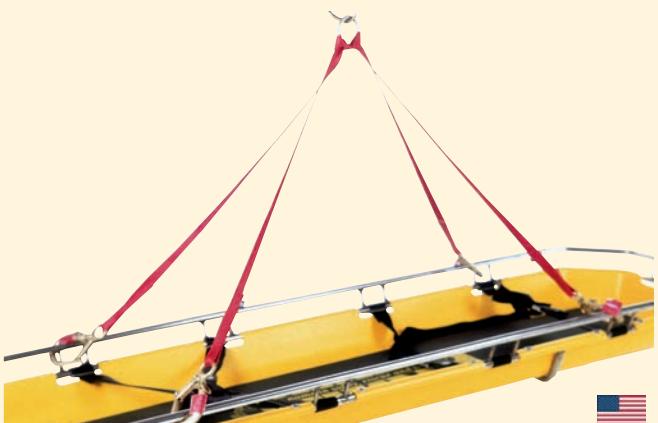

Convertible Litter Bridle

Vertical, Horizontal, and Low Angle Lifting

Ideal for all standard lifting applications. Designed for single rope rigging, the 4-Point Litter Bridle attaches directly to the railing of all types of stretchers. Two 1" heavy duty type 18 nylon slings (Webbing Strength: 6000 lbf.) are looped through a 3" forged steel lifting ring to allow end-to-end height adjustment. Connects to litter with four forged locking snap links (included). WLL: 600 lbs. Weight: 5 lbs. Color: Red.

620180	4-Point Convertible Litter Bridle	130.00
--------	-----------------------------------	--------



Low-Angle Litter Bridle

Ideal for scree-slope and other low angle litter operations. Provides stable, secure connection. Manufactured of high strength webbing and forged steel hardware. Attaches to sides and end of litter. Strength: 5,100 lbs. Weight: 1.5 lbs. Color: Black.

620181	Low-Angle Litter Bridle	70.00
--------	-------------------------	-------

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



Full Length Backboard



Manufactured of 3/4" weather-proof Marine Plywood finished with two coats of clear varnish. Large hand cut-outs for easy handling. 3/4" runner on bottom for easy lifting. Special shape fits inside Wire Basket Stretcher. Speed clip version requires purchase of up to 5 Speed Clip Straps. Dimensions: 73" x 17" x 3/4". Shipping Weight: 19 lbs.

620201	Full Length	190.00
620202	Full Length, Speed Clip Pins	190.00
620212R	14" Confined Space (runners)	190.00
620231	Straps for Speed Clip Boards	23.00



620231 - Speed Clip Straps



Full Length Backboard

Lightweight Backboard

Lightweight Backboard



X-Ray Translucent Molded Plastic


Manufactured from the highest grade PVC. Special design is lightweight and easy to clean. Compatible with Patient Restraint Straps and Backboard Strap. Dimensions: 72" x 16". Capacity: 400 lbs. Weight: 15 lbs. Color: Yellow.

620210	L/W Backboard	158.00
620211	L/W Backboard, Speed Clip	158.00

Backboard Head Immobilizer

Designed and recommended for immobilization only. Item includes: two head support pillows with ear openings; base with center pad and two backboard retention straps; straps for head positioning; and a vertical stabilization strap to maintain immobilizer placement at head of the board.

620224	Head Immobilizer	93.00
--------	------------------	-------

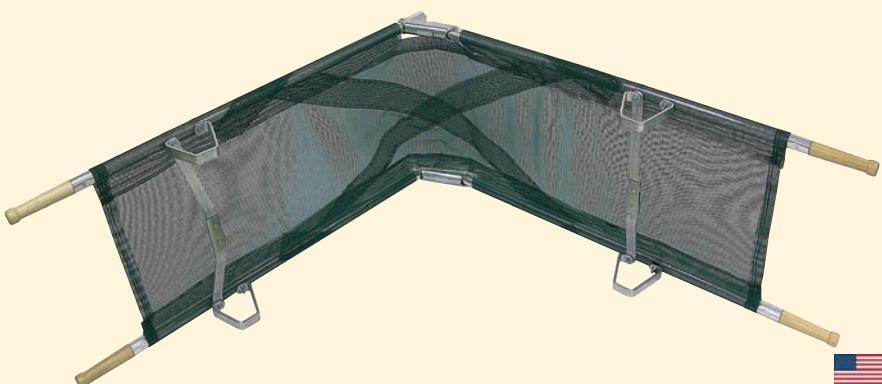

Aluminum Decon Pole Stretcher


Open Mesh Design

Ideal for decontamination. Easily set up and compact for storing. This Medical Corps type litter is light in weight with shaped hardwood handles. Cover is durable 18 oz. vinyl coated nylon.

DIMENSIONS:

Open: 87" x 22" x 4.5"
Folded: 43.5" x 3.5" x 7.5"

2026601M	230.00
----------	--------

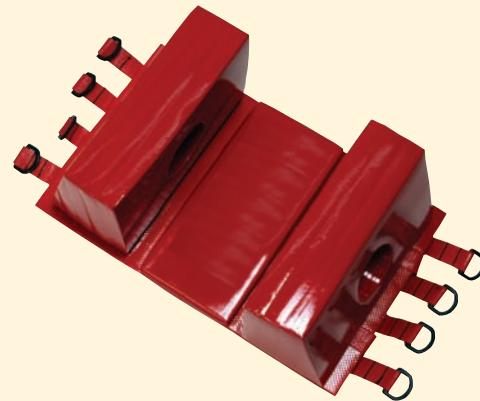

AMBU Per-Fit Ace

The Per-Fit Ace adjusts to ANY adult-size neck with 16 different settings ranging from neckless to tall.

- Stores completely flat
- Horizontal sizing line
- Radiolucent, CT & MRI compatible
- Safety buttons for maximum reliability

23466884	AMBU Per-Fit Ace
----------	------------------

14.25





Clik-Lok 2-Piece Rescue Strap

Manufactured with our new Clik-Lok Buckle, this unit is affixed to backboards and stretchers with a girth hitch. Constructed of 1.75" flat nylon webbing (Tensile Strength: 5,500 lbf. and Clik-Lok adjuster buckles. We recommend crossing the chest area using different color slings to aid in proper buckle attachment. WLL: 600 lbs. Length: 70". Weight: 11.2 oz.

6201512	2-Pc Clik-Lok (Yellow)	30.00
6201514	2-Pc Clik-Lok (Red)	30.00
6201511	2-Pc Clik-Lok (Black)	30.00



Patient Restraint Strap


Used with Stokes type basket litters and backboards. Constructed of 2" flat nylon webbing (Tensile Strength: 5,500 lbf.) and cadmium plated self-locking adjuster buckles. We recommend crossing the chest area using one red and one black to aid in proper buckle attachment. WLL: 600 lbs. Weight: 10 oz.

620131	Black	12.00
620134	Red	12.00



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.

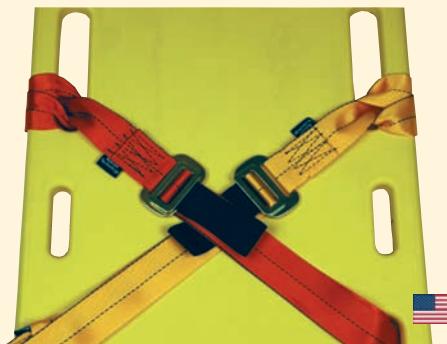

Quick-Fit 2-Piece Rescue Strap™ For Backboards and Stretchers

A two-piece style strap for use with stretchers or backboards. Consisting of two straps with a loop at one end, to girth hitch around stretcher rail, and a connector at the other end. An excellent alternative to "seat buckle" style connectors. Two-piece buckle is manufactured of steel and require movement in two planes to detach. Easy to connect and adjust. Suitable for Technical Rescue Use. Color: Yellow. WLL: 600 lbs

6201522	2-Pc Quick-Fit (Yellow)	13.00
6201524	2-Pc Quick-Fit (Red)	13.00
6201521	2-Pc Quick-Fit (Black)	13.00



Backboard not included

Standard Backboard Multi-Strap

Traditional Design

Strap system that has eight straps that quickly and securely immobilize a spine injured patient to virtually any spine board. Easy deployment from included storage bag. Thread straps through the backboard holes and pull tight. Machine washable 1.5" webbing, 1.5" velcro. Reflective striping on center alignment strap. Complete with zippered carrying bag that will attach to backboard or litter for convenient storage. Weight: 22.5 oz.

620155	BackBoard Multi-Strap	92.00
--------	-----------------------	-------

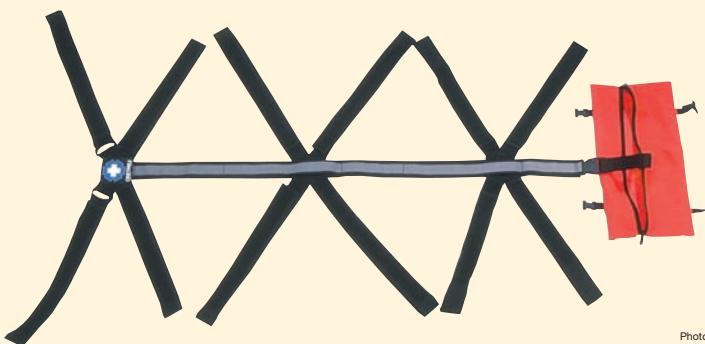


Photo provided by: Conterra

Triple X Backboard Strap™ Innovative Design from Conterra

New strap system that has twelve separate overlapping Velcro® straps that quickly and securely immobilize a spine injured patient to virtually any spine board. Easy deployment. Simply align the three sets of "X" formation straps over the corresponding weight centers of the body (upper chest, pelvis, legs). Thread tie straps through the backboard holes and pull tight. Machine washable 2" webbing, 1.5" velcro. Reflective striping on center alignment strap. Complete with zippered carrying case. Weight: 28 oz.

621131	Triple X BackBoard Strap	95.95
--------	--------------------------	-------





LSP Half Back™

A versatile short body immobilization board designed for suspected cervical/spinal injuries during confined space rescues. Leg straps support lower body during lifting. 6 handles. Closed cell foam interior and metal back stay. Weight: 11 lbs.

2322710	LSP Half Back	950.00
2322711	Vertical Lift Straps for LSP	135.00
2322716	Half Back Carrying Case	125.90



Reeves Sleeve

Immobilizes Patients for Transport

A unique product that converts a full size backboard into a patient immobilization device to be used for vertical and horizontal lifting. Perfect device for confined space rescue because it fits over the backboard (not included). DOES NOT CAUSE FEET TO ANGLE OUTWARD as do popular plastic lifting devices. Sleeve material is a vinyl laminated nylon that meets Mil Spec C 4300 Type 1, Class 1 anti-fungal vinyl and is resistant to acids, alkalies, and liquids. Lifting straps are constructed from 6,000 lbf. Tensile Strength webbing. Reeves Sleeve II has extra webbing reinforcement for greater strength. Storage Dimensions: 24" x 12" x 5". Full Dimensions: 73" x 24". Weight: 14 lbs. Color: Orange.

620401	Reeves Sleeve	445.00
620401S	Reeves Sleeve, Metal Buckles	550.00
620401R	Reeves Sleeve, Reinforced	475.00
620402	Reeves Sleeve II	572.00
20700049	Replacement Head/Chin Strap	17.00

Note: This product, when used with a quality backboard, provides the best medical access of any confined space immobilization devices.

Reeves Sleeve Drag Version

A special conversion of the traditional Reeves Sleeve that adds a special drag sheet. The sheet reduces drag and protects the sleeve in rough environments.

620403	Reeves Sleeve Drag Version	605.00
--------	----------------------------	--------



SPEC Pak™

Improved - Now with Void Filling Foam Blocks

Unique Patient Packaging and Extrication System combines' backboard immobilization of a "Short Board" along with the suspension and support of a full body harness. The PAK System utilizes an integrated polyethylene board along the back of the harness system to reduce wear and allow for a smooth sliding surface for confined space operations. Grab handles located on the sides and head of PAK aid rescuers during movement of patient through confined spaces. Pack System is very useful for any confined space operations where a vertical environment is encountered.

SPEC PAK is a fully certified lifting harness (ANSI Z359.1-1992), thus eliminating the need for a separate victim harness. Unique self-adjusting cervical restraint eliminates the problem associated with lifting patients vertically while secured to a rigid backboard. NEW head pad system helps prevent hyper-extension of cervical area. SPEC PAK is only intended as a limited spinal immobilization system. SPEC PAK must be used with proper spinal immobilization such as the use of a "Cervical Collar" where conditions and protocols dictate.



620410	SPEC Pak	1,125.00
--------	----------	----------



Miller Body Splint™

Complete with a full head and body restraint harness. Rigid foam core provides both strength and buoyancy (will float 250 lbs. in fresh water.) Split leg design.

2154700	Miller Body Splint	735.00
2154720016	Carrying Case	175.00





Oregon Spine Splint II

Absolutely the best spinal immobilization / extraction device available. Preferred to K.E.D., XP-1, and LSP. It immobilizes the spine and the shoulders at the same time.

When applied it allows easy access to the patient's chest or abdomen for treatment or diagnosis. The chest straps hold the patient more securely than other devices, but does not restrict breathing. It folds up extremely small to fit in its carrying bag. Non-absorbing materials for easy cleaning. Weight: 10.6 lbs.



620500	Orange (SK-300-OR)	212.50
6205000D	Olive Green (SK-300-OD)	212.50



Sked Haz-Mat

A SKED designed for mass casualty and Haz-Mat Use. Complete with cut-in hand holds and disposable slings. Stretcher is easily decontaminated.

620416	Sked Haz-Mat (SK-250)	310.00
620417	Body Only (SK-251)	255.00
620418	Haz Mat Straps (SK-252)	52.00
620419	Deployment Case (SK-253)	105.00



Sked® Stretcher

The SKED® basic system includes the SKED® stretcher, Cordura™ backpack, horizontal and vertical lift systems, tow strap and webbing handles. Requires Backboard for proper patient immobilization. Excellent in rescues which require the unit to be dragged through a narrow space. Weight: 16 lbs. Color: Orange.


620415	Sked Stretcher, Complete - Orange (SK-200-OR)	540.00
6204150D	Sked Stretcher, Complete - Olive Green (SK-200-OD)	570.00
620520	Sked Pediatric System (SK-400)	450.00
620420	Half Sked Patient Drag (SK-220)	170.00
620450	Sked Flotation Kit (SK-600-OR)	270.00
620452	Sked Rapid Deployment Conversion Kit (SK-651-OR)	515.00



Haz-Mat Patient Transfer System

Includes everything needed for a rapid evacuation of mass casualties in a haz-mat environment. Includes continuous loop shuttle rope for distances of 100', 150', and 200'. The system allows as many as 4 rescuers in Level A suits to load patients onto the shuttle. System includes: 12 HMD Sked Stretchers, Rescue Winch System, 2 Knot Passing Pulleys, 14 Carabiners, Accessory Cord, 8 Rope Grabs, and 100' Extension Cord w/ Reel.

21172520	Patient Transfer System	10,322.50
-----------------	-------------------------	-----------

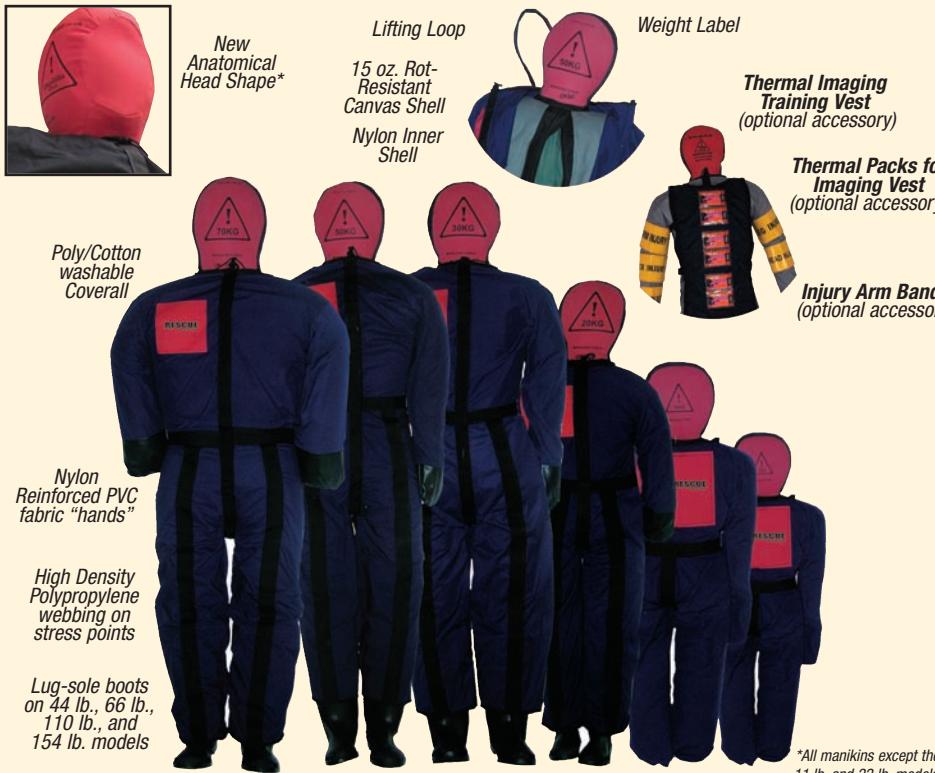

Water Rescue Manikin

Built to the same tough construction standard as the General Use Manikin, the water rescue is built to simulate an unconscious victim in the water, floating at an angle of 45 degrees with just the head and shoulders above the water. The head is color-coded with a yellow "face". Strong plastic strips in the manikin run from the shoulders to the knee and maintain overall flexibility but don't allow the manikin to "flop" in half. The outer carcass is constructed of heavy duty open mesh reinforced with webbing. Additional weight may be placed in special pouches to allow the manikin to sink. Available in Man-Overboard Orange w/ SOLAS reflective strips or Search and Rescue Black. Adult: 5'11"; Youth: 4'3".

23952040	Adult, Orange	88 lbs.	975.00
23952020	Youth, Orange	44 lbs.	750.00
23952140	Adult, Black	88 lbs.	975.00
23952120	Youth, Black	44 lbs.	750.00

General Purpose Training Manikin

More Realistic Performance / Weight Vest Provides Variable Weight

Rugged, realistic in size, weight distribution and handling characteristics. Manufactured using a flexible inner core, an outer shell, and protective overall. The inner core is weighted to human proportions using 4.4 lb weight packets. For structural integrity, the packets are sewn to a nylon "inner dummy" with all the body parts (arms, legs, chest, etc.) held in place with webbing. The outer layer is 15 oz. Rot-resistant Canvas. All seams are double stitched and reinforced with webbing for improved abrasion resistance. The included protective coveralls protect the manikin from dirt and abrasion and are reinforced with high strength webbing in high stress areas. All manikin 44 lbs and up are supplied with lug sole boots that are secured to the manikin. Optional weight vest fits underneath the coverall and allows weight to be added or removed as needed to achieve the desired Manikin weight.

	Description	Weight	Height	
23951005	Infant	11 lbs.	2' 3"	250.00
23951010	Toddler	22 lbs.	2' 10"	430.00
23951020	Youth	44 lbs.	4' 3"	590.00
23951030	Light Adult	66 lbs.	5' 11"	860.00
23951050	Standard Adult	110 lbs.	5' 11"	880.00
23951068	Heavy Adult	150 lbs.	5' 11"	1050.00
23951100	Extra Heavy Adult	220 lbs.	5' 11"	1600.00

	Replacement Reinforced Coveralls	
23959605	Repl. Coverall - Infant	60.00
23959610	Repl. Coverall - Toddler	90.00
23959620	Repl. Coverall - Youth	115.00
23959650	Repl. Coverall - Adult*	115.00
23959670	Repl. Coverall - Heavy Adult	155.00
23959701	Replacement Boots	34.00

*fits both Light and Standard adult manikin



Manikin Storage Bag

A custom-designed bag to fit the youth - Heavy Adult Sized RescueTECH Training Manikins. Features Heavy Duty PVC material and nylon straps. Includes Shoulder straps and end lifting handles

23959104 Storage Bag, Youth / Adult 75.00



Training Manikin Weight Vest

For Adult Training manikin

Special Low-Profile design fits underneath manikin coveralls. Quickly and securely fitted to manikin. Allows one manikin to do the work of many. Now, both heavy and lightweight training needs may be met with a single manikin. (Shown outside of coveralls for clarity).



23959215	15 lbs.	110.00
23959225	25 lbs.	145.00
23969236	36 lbs.	190.00





FR Training Manikin

Fire Resistant Body and Coveralls

This high quality, flame resistant manikin demonstrates a balance between temperature and abrasion resistance. Constructed using a blend of Kevlar/Nomex for the inner core and Kevlar for the outer carcass. The protective coveralls are made using PBI Gold which provides excellent heat and abrasion resistance. All FR training manikin are now fitted with heat resistant Firefighters safety boots supplied by Hunter boots, the boots greatly extend the life of the dummy protecting the legs if the dummy is dragged along the ground. Height: 5' 11".

23953030	66 lbs.	1,500.00
23953050	110 lbs	1,600.00
23959830	Replacement Coveralls, 66 lb.	750.00
23959850	Replacement Coveralls, 110 lb.	750.00



C-Collar not included
Includes Coveralls (not shown)



Thermal Imaging Training Vest

Vest designed to aid in thermal imaging training. Low profile design fits underneath coveralls of FR Manikin. (Shown outside of coveralls for clarity).

23959301	Thermal Imaging Vest	100.00
23959303	Thermal Packs, Set of 2	1.50



Simulaids Training Weight Vest

Designed to replace SCBA Packs and gear during physical Training. Available in Small, Medium/Large, XLarge. Specify Size.

21541112X	20 lbs.	195.00
21541114X	30 lbs.	206.50
21541115X	40 lbs.	220.00

Size	Chest
SM	30-34"
MD	36-42"
XL	44+



Simulaids / I.A.F.F. 50 Lb. Training Weight Vest

A specially designed (with the assistance of the I.A.F.F.) weight vest to aid in firefighter physical ability testing.

The 50 lb. vest simulates the weight of protective clothing and SCBA. Pouches on shoulders accept additional 25 lbs of weight to simulate hose bundle.

New design offers better fit and greater comfort for firefighter.

Size	Chest
SM	30-34"
MD	36-42"
XL	44+

21541118	Small	330.00
21541120	Medium/Large	330.00
21541125	XLarge	330.00
21541000	Extra Shoulder Wgts, 25#	100.00

Multi-Trauma Training Manikin

The Multi-Trauma Rescue Manikin evolved from the Blast and Impaled Victim manikin to combine all the features of these manikin in one product. Additionally, the head has been redesigned to allow the fitting of an extrication collar. So now you have in one manikin a General Purpose rescue manikin that can also simulate an amputated arm and leg, an impaled torso and a suspect neck injury. The hole on the left of the torso allows a spike to be firmly held in place. The right arm and right leg are fully detachable to simulate an amputation, or by partially releasing the locking straps the limb can be weakly attached and will fall off if the rescuer does not correctly assess and support the injury. The manikin is supplied complete with sturdy boots that greatly protect the legs if the manikin is dragged along the ground, and are user-replaceable if badly damaged.



Includes Coveralls & Boots



"Large Gentleman" Bariatric Training Manikins

400 lbs of Realistic Flabby Performance

Designed to achieve a 'fluidity of movement' that simulates an obese patient. The Large Gentleman is based around a 220 lb General Purpose Manikin, the extra bulk is built up with several weighted layers separated by Nylon coated padding. Rather than just adding a 180 lb. 'lump', we have distributed the extra weight around the body in 170 x 1 lb. packets of steel shot (a very time consuming process!). The Nylon coating on the padding allows the different layers to slip and slide over each other creating a real feeling of 'flabby skin'. Includes reinforced coveralls and Boots **AND** Drag Sheet.

Weight: 400 lbs. approx. Ships via Motor Freight Only

23951180 Large Gentleman 4,200.00
29963144 Bariatric Carrying/Drag Sheet 140.00



Casualty Training Armbands

Provides Identification of Injuries

MCI casualty Armbands for Training manikin. Includes one each: Head, Arm, Leg, Neck, Back, Chest.

23959501 Arm Bands, set of 6 160.00



Haz-Mat Rescue Decon Manikin

Heavy Duty, Water Resistant Outer Shell

The HazMat Rescue Training Manikin is based upon our popular General Purpose Training Manikin. Available in 66 lb. and 110 lb. models. The internal construction is basically identical to the General Purpose Manikin, but the HazMat Manikin has an outer carcass made from tough, nylon reinforced PVC. This material is designed to withstand being heavily doused with water during a chemical spillage exercise or laying in water during a storm water drain or cave rescue exercise. In fact, it is useful in any scenario where the manikin has to endure a constantly wet environment. The HazMat Manikin has no flotation so where scenarios are in deep water, the use of our Water Rescue Manikin is indicated. Supplied with a coverall of polyurethane coated polyester with polypropylene webbing in high stress areas. At the end of the exercise, simply hose down the whole manikin and hang up using the integral lifting loop at the back. Replaceable reinforced coveralls and Lug-Sole Boots. Anatomical Head.

23957130 66 lbs. 975.00
23957150 110 lbs. 1,000.00



Drag Harness for Rescue Manikin

A Full Body Harness with added shoulder handles for use with the Training manikins. Fits all Adult size manikin

718130 Manikin Drag Harness 90.00





Rescue Randy

Official Manikin of the Firefighter Combat Challenge

Molded of durable vinyl plastic. Built with 4,200 lbf. test plastic coated cables. Articulated Joints. Weight distribution according to human weight distribution chart. Used by U.S. Military, Fire and Police Departments, Safety Teams, and Emergency personnel for rescue and extrication. Ideal for Tower, Confined Space and Trench Rescue.



Description	Weight	Height
21544175 Rescue Randy IAFF	165 lbs.	56"
21544165 Rescue Randy Combat Challenge	165 lbs.	56"
21544145 Rescue Randy Combat Challenge	145 lbs.	56"
21545200 Rescue Randy IAFF	200 lbs.	56"
21545175 Rescue Randy IAFF	175 lbs.	56"
21545125 Rescue Randy IAFF	125 lbs.	56"
21544105 Rescue Randy	105 lbs.	50"
21544055 Rescue Randy	55 lbs.	50"
21541355 Rescue Jennifer	16 lbs.	49"
21541355R Rescue Jennifer II	38 lbs.	49"
21542094 Storage Bag, Combat Challenge		145.00



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.




Flexible Rescue Randy

This regular-sized Rescue Randy unit has been developed especially for the aero-space industry and wing tank fuel cell rescue training, but it can be utilized in any confined space rescue. It exceeds the flexibility of the Regular Rescue Randy products (1300 series item numbers) because the waist flexes and the head twists to allow positioning of the manikin under dashboards, in tight spots, and under things where the Regular Randy will not go. Flexible 5 ft. 5" Rescue Randy. Size: 50" x 21" x 12". Shipping Weight: 60 lbs.

21542710

820.00

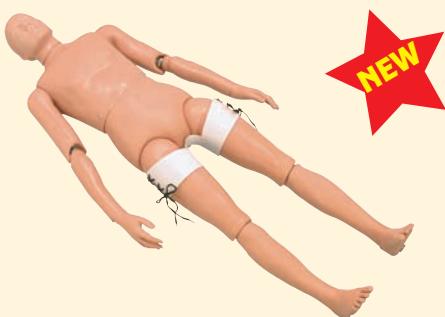


Randy Intervention Truss

Designed with the Rapid intervention Team (RIT) and confined space rescues in mind, this adjunct to the Rescue Randy eliminates strap pressure applied to the groin area of the Randy when harness straps pass through the manikin groin area. After the device is attached to the manikin thighs, the harness or waist strap that is passed through the groin during exercises will not hinder the structure of the manikin skeleton, which causes degradation of the pelvis. Use this inexpensive product to protect the investment you made in your Rescue Randy.

21541479

55.00

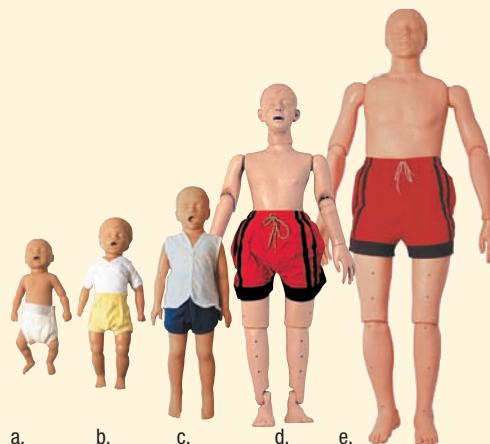

Water Rescue Training Manikin

Used by the U.S. Coast Guard, Sheriff's Departments, Lifeguard Trainers and Emergency Personnel for both on water and in water rescue and retrieval. Manufactured of durable vinyl plastic with rust resistant steel skeleton (adult and adolescent models). Articulated joints on Adult and Adolescent. When filled with water manikin will submerge to neck. Add an additional 5 - 10 lb weight (not supplied) to sink.

21541326	Adult	65 x 23 x 9"	52 lbs.	605.00
21541327	Adolescent	49 x 16 x 9"	22 lbs.	550.00
21541351	3 Year Old	34 x 11 x 7"	10 lbs.	160.00
21541352	6 - 9 Month	26 x 8 x 8"	7 lbs.	151.00
21541350	Infant	22 x 8 x 8"	5 lbs.	135.00



USAR-TECH

Rope & Equipment Pack

A full backpack style equipment storage/carrier. Features a rope bag section with room for 200 ft. of 1/2" Access Lifeline **PLUS** space for a pre-rig rescue system. This feature is easily accessible without opening the main compartment. The main compartment features RescueTECH's exclusive "expanding compartment" storage system. The system effectively doubles the storage space for webbing, slings, and rope guards by placing a divider in the main compartment. Adjustable Shoulder and waist straps will accommodate all rescuers. Waist pads will actually expand to fit larger waists. The semi-rigid internal frame supports gear. All straps may be tucked into special storage areas to prevent tangling with other equipment in the compartment. Manufactured in our Georgia facility from fabric made from Dupont Cordura Brand fibers. Dimensions: 20" h x 18" w x 10" d.

808326	Blue	240.00
808324	Red	240.00
808321	Black	240.00
808320	Orange	240.00



First equipment section opens to show webbing, sling, and rope protector storage section

Equipment not included



Equipment not included



Opening the divider reveals additional sling storage and mesh compartments for hardware and rigging supplies.

Rope and Pre-Rig Accessible
from exterior through our rapid
access opening

USAR-OPS

Rope & Equipment Pack

A slightly smaller version of our popular USAR Rope and Equipment Pack, the Standard Rescue pack is durable and versatile. 4 interior mesh pockets securely hold small items. Outside 'slash' pockets and full width interior pockets give ample storage space for rope pads, slings and webbing. Horizontal strap system allows for attachment of pulleys and carabiners. Holds 150' of 1/2" rope and pre-rig in rope section. Padded shoulder straps and waist strap are comfortable and easily stowed for bag storage. Dimensions: 20" h x 16" w x 10" d.

808334	Red	190.00
808336	Blue	190.00
808331	Black	190.00



Side View:
Padded Shoulder Straps
and Slash Pocket



Back View:
Stowed Shoulder
Straps.



Interior View:
multiple mesh
pouches,
attachment straps
and slot pocket.





Equipment not included.

Deluxe Equipment Pack

An innovative pack designed to provide organized storage and convenient transport of rescue equipment. The main compartment (11" w x 16" h x 6" d) is fully padded with closed cell foam and has webbing loops to attach equipment. The pack has a webbing carrying-handle and padded contour shoulder straps. A false back stores the shoulder straps when not in use. A front outside compartment is 15" h x 10" w x 3" d. The compartment has a sleeve for a rescue rack. Weight: 2.2 lbs.

808300	Orange	130.00
808304	Red	130.00
808306	Blue	130.00

Rescuer Equipment Pack

A larger version of our Deluxe Equipment pack. Larger dimensions along with our Expanding Compartment Storage System gives rescuers extra room for needed equipment. 5 Mesh Pockets and 2 equipment loops. Padded stow-away shoulder straps. Self-Healing #10 industrial zipper. Dimensions: 20" h x 16" w x 5" d.

808344	Red	185.00
808346	Blue	185.00



Side View:
Padded Shoulder
Straps.



Back View:
Stowed Shoulder
Straps.



Interior View:
multiple mesh
pouches,
attachment straps
and slot pocket.



Equipment Saddle Bag Organizes Equipment

A modular accessory for our rope bags. Organizes technical gear into a convenient deployment package. Fits our medium, large, and extra-large size rope bags. The Saddle Organizer pockets are 8" x 4" x 20" with #10 zippers and a clear vinyl window for inventory lists. External Mesh Organizers for quickly needed items. Weight: 1.25 lbs. Rope Bag not included.

808901	Equip. Organizer (Black)	92.00
808904	Equip. Organizer (Red)	92.00
808906	Equip. Organizer (Blue)	92.00



Equipment not included

Equipment Cache

A handy storage pack for quickly needed rescue equipment. Padded sides, 4 Mesh Pockets, 8 equipment loops. Dimensions: Closed: 23" x 12" x 4"; Open: 23" x 24" x 2".

811339	Equipment Cache	80.00
--------	-----------------	-------



Deluxe Search & Rescue Pack

The big brother of the standard SAR pack with several useful additions. There are also lash points on the front for additional gear. Behind the lashing is a pocket to carry a water reservoir. The rope compartment carries over 300 feet of 1/2" rope, and a pocket in the hood holds maps, a compass, GPS, and glasses. There's also a water bottle carrier on the hip pads. Internal volume: 3400 cu. in. Dimensions: 31" h x 10" w x 9" d

808954 Deluxe S.A.R. Pack (Red) 227.00
808956 Deluxe S.A.R. Pack (Blue) 227.00

Standard Search & Rescue Pack

For Search and Rescue or Confined Space Operations. The S.A.R. Pack hauls equipment in a technical climbing designed semi-stayed internal frame backpack. When you need your gear, everything is laid out for rapid deployment. The rope is compartmentalized, and there are two large pockets for BLS gear, harnesses, and other equipment you need on the mission. Holds up to 200 ft. of 1/2" Rope. Weight: 4.25 lbs. Dimensions: 24" h x 10" w x 9" d.

808941 S.A.R. Pack (Black) 218.00
808942 S.A.R. Pack (Yellow) 218.00
808944 S.A.R. Pack (Red) 218.00
808945 S.A.R. Pack (Green) 218.00
808946 S.A.R. Pack (Blue) 218.00



Equipment not included.

Rescue Pack

Top of the line backpack rescue organizer. Neatly organizes individual rescue equipment on a panel style pack. Internal frame and adjustable shoulder, sternum, and waist straps. Two Models: Technical Rescue Equipment Pack for equipment only. High Angle Rescue Pack for Equipment and 200 ft of 1/2" Rope. Dimensions: 18" W x 24" H x 14" D.

808926 Technical Pack (Blue) 265.00
808936 High Angle Pack (Blue) 315.00



RT Duffel Bag

A traditional cylinder bag built with the same high quality and durability as all of our rope and equipment bags. Manufactured from our RescueTECH™ super tough fabric. Seams are double-stitched and taped for superior strength.

LARGE: 20" x 10"

8063140 Orange 45.00
8063141 Black 45.00
8063144 Red 45.00
8063146 Blue 45.00

XLARGE: 24" x 14"

8063150 Orange 55.00
8063151 Black 55.00
8063154 Red 55.00
8063156 Blue 55.00

809790 Shoulder Strap, Adjustable 11.00



Double End Rope Bag

Made from Cordura™ Nylon w/ grab and throw loops. Drawstring openings at both ends allow user to "rotate" the rope using both ends equally. Manufactured in U.S.A. Color: Black.

Capacity

	Small	150 ft. of 1/2"	35.00
804201	Small	150 ft. of 1/2"	35.00
804301	Medium	200 ft. of 1/2"	42.00
804401	Large	300 ft. of 1/2"	44.00





USAR Task Force Member Pack

A Multi-Use Personal Equipment Pack

Designed at the request of a Southeastern USAR Team, the pack keeps Helmet, Class III harness, Carabiners, Webbing, Gloves, Accessory Cord, Goggles and other personal gear ready for deployment.

Manufactured of High Strength Polyester fabric.

Padded on all sides to protect contents. "D" rings on end accept shoulder straps. We can even fill it with the equipment that you need. Dimensions: 24 x 12 x 10"

29962101 USAR Member Pack 87.00
809790 Shoulder Strap 11.00



Mesh PFD Bag

The Mesh PFD Bag makes it easy to transport and store your damp and difficult-to-carry gear. The top of this bag is made with the same 2-1/2" square mesh netting so that everything inside dries quickly. The bottom is 500 denier PVC for durability. Two sturdy handles and a quick-cinch draw cord opening allow you to pick up and go. Room enough for all your friends' gear, too. Holds up to 18 PFDs. Dimensions: 40"W x 40)L x 30"H

20843094 80.00

RescueTECH Rescuer Gear Bag

We took the time to design a bag that a rescuer could keep personal gear ready to go. The main section has a zipper system that allow quick and full access to the contents. The large end pouch will hold an R3 Kiwi helmet, but can also be used for a change of clothes, harness, and other rescue items. The small end pouch works great for gloves, slings, etc. Side pockets hold other personal gear. A zippered see-through panel can be used for personal identification and allows the bag to be used and marked as a specific use rescue kit. Includes adjustable shoulder strap. Dimensions: 25 x 12 x 10". Color: Black



Equipment not included

809741 Black 90.00
809744 Red 90.00



Includes Shoulder Strap

RT Gear Bag

Heavy Duty Carrying Handles on Ends

A large Duffel design easily stores turnouts, helmet and boots. Great for all rescue personnel. The two-way wrap around zipper allows you to open bag all the way for easy access to contents. A large zipper pocket outside gives you extra storage for personal items, gloves, tools and goggles. Two inch webbed handles wrap completely around the bag to give extra support Dimensions: 12" x 16" x 23". Color: Red. Weight: 1.5 lbs.



809704 Gear Bag 80.00

Equipment not included



Equipment not included



RT Gear Pack

Stowaway Padded Shoulder Straps

Based on our popular Gear Bag design, we added shoulder straps to make it easier to move this pack around. Easily stores turnouts, helmet and boots. Great for all rescue personnel. Two-way wrap around zipper allows you to open bag all the way for easy access to contents. A large zipper pocket outside gives you extra storage for personal items, gloves, tools and goggles. Two inch webbed handles wrap completely around the bag to give extra support Dimensions: 12" x 16" x 23". Color: Red. Weight: 1.5 lbs.



809844 Gear Pack 115.00



Hall County SCBA Mask Bag™

After many months of searching and evaluation, Hall County Fire (Georgia) decided upon this design to protect their SCBA masks. Made of durable 1000d Cordura™ fit their needs to a "T". Closed with a durable #10 Zipper instead of Velcro™ for a long service life. Hall County chose to line the interior with a smooth, coated 200 denier nylon fabric instead of a fleece material. Their evaluations concluded that while the fleece was soft, it trapped dirt and contaminant in the material and between the inner and outer layer. Features a bottom grommet for drainage and a hook and loop strip to attach name plates or accountability tags. A durable 1" wide nylon webbing loop allows the bag to be attached to turnout gear or hooks in the apparatus or equipment lockers. Dimensions: 13.5" x 6.5"



8321014 Hall County SCBA Mask 23.00



Basic SCBA Mask Bag

A basic, envelope-style SCBA mask Bag. Made from highest quality 300 x 600 PVC coated nylon fabric for durability and water resistance. Full width hook and loop fastener keeps the contents clean and ready for use. Steel ring allows firefighter to attach this bag to turnout gear with a simple key-ring carabiner. Fits most mask-regulator style SCBA Masks (Scott®, Interspiro®, etc.) Color: Red. Bags may be ordered with embroidery (25 unit minimum). Call for details. Dimensions: 14" x 10" x 4".

8321015 Basic Mask Bag 16.00



Harness Rigging Pouch shown on Corona™ Escape Belt

Harness Rigging Pouch

A great addition to a rescuer's gear selection. The Rigging Pouch attaches to the waist belt of a rescue harness and provides quick access to often used equipment. Padded sides. Holds carabiners, slings, pulleys, etc. Easy access while "on rope". Locking Zipper prevents accidental opening. Inside features rigging loop and snap closure mesh pouch. Dimensions: 9.5 L x 7" H x 3" D. Weight: 11 oz.. Equipment not included.

800201 Harness Rigging Pouch 32.00



Harness Equipment Pouch

Our newest personal Harness Pouch. Designed to hold the many tools required by rescue technicians. The main pocket has a special collar closure that is secured with a cord lock. The front bellows pouch can hold quickly needed equipment. An exterior gear loop and mesh pocket multiplies the uses of this high quality bag. Dimensions: 8" L x 6.5" x 4.5" D. Weight: 12 oz.. Equipment not included.

800214	Red	34.00
800211	Black	34.00



Equipment and harness not included.

Lanyard Pouch

For lanyards, personal escape rope, gloves, and miscellaneous small equipment. Constructed of Cordura® nylon with fold over hook and loop closure. Built-in loops fit belts up to 4" wide. Holds 40 feet of 3/8" or 75 feet of 7mm nylon tag line or Titan Cord. Dimensions: 8" x 5" x 3". Color: Black. Weight: 2.4 oz.

800101 Lanyard Pouch 17.00



Equipment not included.

Deluxe Lanyard Pouch

Great for search kits. A larger version of our popular Lanyard Pouch. The Deluxe Lanyard Pouch features a "hinged" lid with a "hook and loop" closure. Holds up to 80 ft. of 8mm cord. Dimensions: 11" H x 7" W x 3" D. Color: Black, Orange. Weight: 3 oz.

8001151	Black	28.00
8001150	Orange	28.00

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.





SAR Drysuit

Energlo arms help for low or no light conditions. 400-denier TriTon fabric will hold up to years of abuse. Cordura® exterior material reinforces seat, elbows and knees for rugged protection in high-wear areas. Neoprene padding in the elbows and knees provide extra protection while working in the field. Liquid neoprene coating protects latex wrist and neck gaskets from UV rays. TriTon fabric socks. Internal suspenders. Self-draining thigh pocket and a splash proof arm pocket. Heavy-duty YKK® waterproof men's relief zipper and entry zipper seals out water. Neoprene outer cuffs with adjustable hook-and-loop closures on the neck, wrist and ankles protect the latex gaskets.

Reflective material on the wrists and piping. Pull cord waist adjustment allows for a more custom fit.

2084225153	M/L	637.50
2084225155	XL/XXL	637.50



Swiftwater Rescue Drysuit

The Mustang Swift Water Rescue Dry Suit provides maximum protection without sacrificing the mobility and comfort required for long duration wear in adverse environments.

- Breathable GORE-TEX® reduces thermal stress
- Durable Kevlar® patches on legs and seat
- Adjustable neck seal and neoprene wrist seals
- Cushioned knees and elbows for protection
- Internal elastic suspender system
- Diagonal cross-chest waterproof entry zipper
- Waterproof relief zipper

204957520	Small	1250.00
204957530	Medium	1250.00
204957540	Large	1250.00
204957550	XLarge	1250.00
204957560	XXLarge	1350.00



Rescue Technician Deluxe Drysuit

Ultimate In Rescuer Comfort

Made from three ply waterproof/breathable laminate having a micro denier polyester exterior fabric, a Sympatex waterproof / breathable barrier membrane and a tricot fabric inside layer. SOLAS Reflective tape included on elbow pad above the wrist wraps. Diagonal entry #8 brass tooth zipper with zipper cover for guaranteed watertightness. Cordura Butt Pad, Knee Pads, and Wrist/Ankle Wraps for protection, strength and improved slip control. Color: Sea Rescue Orange.

230906022	Small	820.00
230906032	Medium	820.00
230906042	Large	820.00
230906052	XLarge	820.00
230906062	XXLarge	845.00



Wavelite Union Suit

10 oz polyester/Spandex blend for a mid-weight insulating layer with excellent stretch. Soft terry liner and flat-stitched construction for comfort. Wear the Union Suit for a toasty, draft-free base layer under your drysuit. Double-pull zipper with protective inner flap. Specify size: XS - XXL.

208422552X	Union Suit	75.00
------------	------------	-------

! WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



EXTREME Drysuit

It utilizes 420-denier 3-layer TriTon™ fabric, making it rugged, waterproof and highly breathable. Heavy-duty YKK waterproof zipper across the body, plus extra-tough latex wrist and neck gaskets. Reinforced Cordura® seat, elbows and knees. Neoprene outer cuffs with adjustable hook-and-loop closures on the neck, wrist and ankles help keep you warm and protect gaskets from tough use. Reflective arm strips and shock-cord waist adjustment. Relief Version is complete with Relief Zipper and TriTon Socks.

20842250X	Extreme Drysuit, S-XL	405.00
208422506	Extreme Drysuit, XXL	435.00
20842251X	Extreme Relief, S-XL	506.00
208422516	Extreme Relief, XXL	530.00



Swift Entry Drysuit

Basic Swiftwater Drysuit

A rugged dry suit at an economical price. This popular drysuit is now built with waterproof, breathable Tropos fabric. The Swift-Entry has an adjustable waistband to allow for custom fit. Neoprene cuffs over latex gaskets at wrists and ankles, plus reinforced knees and seat, ensure long life. YKK metal-tooth zipper. Sizes: S-XXL. Color: Cobalt/Black.

208422522	Small	435.00
208422523	Medium	435.00
208422524	Large	435.00
208422525	XLarge	435.00
208422526	XXLarge	460.00

Swift Entry Drysuit

Size	Height	Weight
S	5'2" - 5'6"	115-140 lbs.
M	5'6" - 6'0"	140-175 lbs.
L	5'10"- 6'2"	175-200 lbs.
XL	6'0" - 6'4"	200-240 lbs.
XXL	6'4" - 6'6"	220-260 lbs.



Front Entry Drysuit

Breathable GORETEX® Technology

3-Layer GORE-TEX® IMMERSION® Technology fabric is completely waterproof, breathable, and durable. Tightly woven fabric is tough as nails, yet quiet and comfortable. Color: Mango/Cobalt. Sizes S-XXL. For Rescue Tech by Kokotat. Specify Size.

Standard: Latex gaskets, neoprene trim, metal tooth waterproof zipper. 500 den Cordura seat and knee patches. Self-draining pockets.

Deluxe: adds Gore-Tex™ booties and relief zipper

2309011X	Standard, S-XL	715.00
23090116	Standard, XXL	800.00
2309012X	Deluxe, S-XL	880.00
23090126	Deluxe, XXL	925.00

Front Entry Drysuit

Size	Height	Weight
S	5'2" - 5'6"	115-140 lbs.
M	5'6" - 6'0"	140-175 lbs.
L	5'10"- 6'2"	175-200 lbs.
XL	6'0" - 6'4"	200-240 lbs.
XXL	6'4" - 6'6"	220-260 lbs.



Drysuit Undergarments

The next generation of next-to-the-skin layering garments. Made from anti-microbial fabric for warmth, comfort and breathability. These high performance pieces are designed to provide a comfortable, wicking first layer under clothing, drysuits, and wetsuits. Specify Size: S - XXL.

20842550X	Pants, S, M, L, XL	23.00
208425506	Pants, XXL	26.00
20842551X	Shirt, S, M, L, XL	23.00
208425516	Shirt, XXL	26.00

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.





Ice Commander Rescue Suit

The suit of choice for Coast Guard, SAR, Fire, and all Ice Rescue Professionals. Its integral chest harness, ice awl pockets, gloves, reinforcements and non-slip soles keep you prepared for any emergency. Highly visible welded nylon shell and removable AirSoft™ foam liner. It's 45% lighter than conventional neoprene suits, giving maximum flexibility and performance. Size: Adult Universal. Body Mass: 110 - 330 lbs. Height: 4'11" - 6'7". Color: Yellow.

20499000	Ice Commander Rescue	800.00
20492001	Replacement Bag	35.00
2049228202	Replacement Liner	145.00
20492290	Repair Kit	13.00

Cold Water Dive Hood

Cold water diving hood with bib. One of the most comfortable and best fitting hoods on the market. 6.5mm neoprene, 3mm skin-in face seal & 3mm Nylon II bib. Vent at top of hood releases excess air. Face area left unbound for custom trimming. Also available with zipper closure for easier donning and doffing. Specify Size.



23709241X 6.5mm	35.00
23709251X 6.5mm with Zipper	44.00

Cool Water Dive Hood

1.5mm nylon II neoprene. Face area left unbound for custom trimming. Also available with zipper closure for easier donning and doffing. Specify Size.

23709221X 1.5mm Hood	28.00
-----------------------------	--------------



3mm Shorty

The little brother of our best selling Farmer John, the Shorty Wetsuit combines warmth and mobility for those warm weather, cold water days.

- 3mm neoprene retains core body heat and offers cushioning.
- Short-cut legs give increased freedom without sacrificing core warmth.
- Featuring a full-length, double-pull front zipper for ease of entry and relief.

208422173	Men's, Medium	67.00	208422161	Women's, XSmall	67.00
208422174	Men's, Large	67.00	208422162	Women's, Small	67.00
208422175	Men's, XLarge	67.00	208422163	Women's, Medium	67.00
208422176	Men's, XXLarge	67.00	208422164	Women's, Large	67.00
208422177	Men's, XXXLarge	67.00	208422165	Women's, XLarge	67.00
20842217G3	Men's Grizzly, Medium	85.00			
20842217G4	Men's Grizzly, Large	85.00			
20842217G6	Men's Grizzly, XXLarge	85.00			
20842217G8	Men's Grizzly, XXXXLarge	85.00			



2mm Wetsuit Jacket

Combine the 2mm neoprene Wetsuit Jacket with any of our other wetsuits for maximum warmth in your arms and torso. The Grizzly Wetsuit Jacket gives the greater girth needed by the barrel-chested boater. Pair these items with matching Farmer John suits for the ultimate warmth and comfort. 2mm neoprene with Titanium laminate adhesive increases warmth without adding excess bulk. PowerSpan™ under the arms gives you plenty of mobility. The extended waist and raised collar give you superior coverage and increased warmth and comfort. YKK® wrist and full-front zippers provide easy, trouble-free entry.

208422103	Medium	72.50	20842210G3	Grizzly, Medium	85.00
208422104	Large	72.50	20842210G4	Grizzly, Large	85.00
208422105	XLarge	72.50	20842210G6	Grizzly, XXLarge	85.00
208422106	XXLarge	72.50	20842210G8	Grizzly, XXXXLarge	85.00
208422107	XXXLarge	72.50			





Grizzly Farmer Bill

Big folks know finding the right size in water gear can be a bear. The Grizzly wetsuit is extra roomy.

- Features 3-mm Neoprene for superior insulation.
- Cut large around the chest, waist, thighs and calves.
- Combines the convenience of a full-length front zipper with roomy, over-the-shoulder Farmer Bill-style suspenders.
- Color: All sizes are black - shoulders are color coded by size.

20842219G3	Medium	111.00
20842219G4	Large	111.00
20842219G6	XXLarge	111.00
22822219G7	XXXXLarge	111.00



Farmer John / Farmer Jane

Just the essentials, at a great price. The same proven design as the 3mm Farmer John, but crafted with lighter 2.5-mm neoprene.

- 2.5-mm neoprene forms the base and is protectively backed with comfortable nylon on both sides.
- Large arm holes assure you full freedom of movement.
- Extra-long, double-pull YKK® front zipper for easy entry and relief.
- Armored seat and knees have reinforced padding for extra durability and protection.
- Zippered ankles make it easy to get over booties.

208422243	Mens, Medium	80.00
208422244	Mens, Large	80.00
208422245	Mens, XLarge	80.00
208422246	Mens, XXLarge	80.00
208422247	Mens, XXXLarge	80.00
208422248	Mens, XXXXLarge	80.00
208422251	Womens, XSmall	80.00
208422252	Womens, Small	80.00
208422253	Womens, Medium	80.00
208422254	Womens, Large	80.00
208422255	Womens, XLarge	80.00
208422256	Womens, XXLarge	80.00



Standard Rescue Wetsuit

Front Zipper

A full-coverage suit. 3 mm Dupont® neoprene provides insulation, while PowerSpan™ panels on the shoulders, back and arms increase mobility. Zippers on wrists and ankles for easy exit from the suit after a long day. Textured raw neoprene friction zones on the sides help lock a PFD in place. 5 mm seat for extra padding is covered with ToughTex™ for durability. Molded polyurethane knees and shins for long wear and extra protection. Reflective Lettering and Bright Yellow Panels Color: Yellow/Black. Grizzly Version provides extra room in the chest and waist area.

208422132	Small	234.00
208422133	Medium	234.00
208422134	Large	234.00
208422135	XLarge	234.00
208422136	XXLarge	234.00
208422137	XXXLarge	234.00
20842213G4	Grizzly Large	251.00
20842213G6	Grizzly XXLarge	251.00




Seal Skinz Socks

A three-layer, waterproof and breathable sock that fits perfectly under any river shoe or sandal. Specify Size: S-XL.

20842350X	Seal Skinz Sock	32.95
-----------	-----------------	-------

Women's Wetsuit Sizing - Standard		
Size	Height	Weight
XS	4'8" - 5'2"	90-115 lbs.
S	5'1" - 5'6"	110-135 lbs.
M	5'5" - 5'8"	130-155 lbs.
L	5'7" - 5'10"	150-180 lbs.
XL	5'9" - 6'0"	175-210 lbs.
XXL	5'11" - 6'2"	200-220 lbs.

Men's Wetsuit Sizing - Standard		
Size	Height	Weight
S	5'2" - 5'6"	115-140 lbs.
M	5'5" - 5'8"	135-165 lbs.
L	5'7" - 6'0"	150-195 lbs.
XL	5'10" - 6'2"	185-225 lbs.
XXL	6'1" - 6'4"	215-245 lbs.
XXXL	6'3" - 6'5"	230-255 lbs.
XXXXL	6'4" - 6'6"	245+

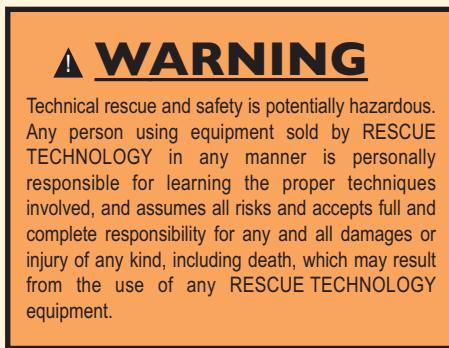

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.

Wetsuit Sizing - Grizzly		
Size	Height	Weight
G-Med	5'5" - 5'9"	200-235 lbs.
G-Large	5'8" - 6'0"	230-265 lbs.
G-XXL	5'11" - 6'4"	260-305 lbs.
G-XXXXL	6'3" - 6'6"	275-320 lbs.





Mustang Classic Inflatable PFD

Reliability with T-Shirt comfort.

Compact design lays flat against chest for freedom of movement. Durable 420 denier Outer shell, 35 lbs of buoyancy. Includes Safety Whistle, SOLAS reflective tape. When inflated is capable of self-righting a face down person. Available with manual activation or manual with automatic backup. Auto-inflation system activates in contact with water. Universal size Age: 16 years and up. Weight: 80 lbs and up. Color: Navy. USCG Type V

204930034 Airforce Inflatable PFD(RD) 145.00

204930036 Airforce Inflatable PFD(BL) 145.00

20497170 Re-Arm Kit for Airforce 14.00

204930314 Airforce with Auto backup (RD) 193.00

204930316 Airforce with Auto backup (BL) 193.00

20497172 Re-Arm Kit for Auto-inflate 21.50



Mustang HIT Inflatable PFD

Hydrostatic Auto-Inflation

For severe weather, no premature inflation, low maintenance. The Auto Hydrostatic Inflatable Personal Flotation Device (PFD) will only automatically inflate when submerged in 4 or more inches of water and not prematurely due to rain, spray or humidity. No inflator maintenance is required for 5 years unless the PFD has been inflated. Inflator status and replacement date viewed through the safety inspection window. Made for the most demanding users, constructed of durable 420-Denier nylon and heavy duty polyurethane coated nylon. Lightweight and comfortable, the PFD can be worn over a T-shirt or jacket. It is low profile and allows for the maximum amount of mobility. The neoprene Comfort Collar™ is so soft it won't chafe your neck. USCG Type V

204931834 HIT, Red/Black 250.00

204931831 HIT, Charcoal/Black 250.00

20497214 HIT Re-Arm Kit 70.00



Force 6 Rescuer Vest

This IRIA Certified rescue vest is made of rugged, high visibility rip stop nylon and contain extra flotation to combat the reduced buoyancy effects of turbulent water.

- M/L vest provides 28 lbs of buoyancy
- XL vest provides 32 lbs of buoyancy
- Integrated structural harness
- Polymer panels for impact protection
- "Live bait" quick release
- Fast Tabs on both shoulders for easy attachment of accessories such as knives, scissors or strobe lights
- Reflective tape over the shoulders and on both pockets
- Two quick-drain front pockets
- One piece over the shoulder foam provides extra strength, structural integrity and body protection
- Three-part waistbelt for fit
- IRIA certified
- Transport Canada approved to CAN/CGSB 65.11-M88

20491003 M/L 215.00

20491005 XL 215.00

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.

Force 6 Instructor Vest

Force 6 has taken their Rescuer Vest 1-step further by adding features needed by instructors. In addition to the long list of of Force 6 Rescue Vest specifications, the Instructor Vest includes: Removable front and back pockets and Extrication leash (cowtail).

20492003 M/L 275.00

20492005 XL 275.00





Rear "D" Ring

Universal Rescuer

Universal Sizing fits 30 - 56" Chest

Features over-the-shoulder integral webbing reinforcement, a USCG approved rescuer's harness, and reflective tape on the shoulders and across the back. Design Flotation: 23 lbs.

350632	Yellow	165.00
350634	Red	165.00

USCG Approved, UL Listed Type III PFD



Rear "D" Ring

Swiftwater Fury

Highest flotation available in a short PFD, with ultra-soft foam for remarkable comfort and mobility. Designed for rescue units that need its unique combination of high buoyancy and short length. Features a loop strip over the shoulder to attach various accessories. Quick-release belt. Design Flotation: 22 lbs. - 22 lbs. 13 oz. Specify Size: S, M, L, XL.

3502X2	Yellow	150.00
3502X4	Red	150.00

USCG Approved, UL Listed Type V PFD.



Rear "D" Ring

Swiftwater Ranger

The most buoyancy available in a rescue PFD. Its high back, padded shoulders, and long length offer exceptional protection when swimming rapids. THE choice of swiftwater rescue teams nationwide. Quick-release belt. Design Flotation: 24 lbs. 7 oz. - 26 lbs. 12 oz. Specify Size: S, M, L, XL.

3503X2	Yellow	150.00
3503X4	Red	150.00

USCG Approved, UL Listed Type V PFD.

SIZE	Fury	Ranger
Small	37 - 39"	36 - 39"
Medium	40 - 42"	40 - 44"
Large	43 - 45"	45 - 49"
XLarge	46 - 48"	48 - 52"



U22 Agency Pro

Universal Size high flotation vest

The U22 fits chest sizes from 30 - 56 inches. Its generous divided side pockets, external D-rings, and lash tabs allow attachment of multiple accessories. A 3 buckle closure system, generous reflective tape and 8 adjustment points create an excellent high-flotation option for water rescue and support teams. Design Flotation: 23 lbs.

350732	Yellow	115.00
350734	Red	115.00

USCG Approved, UL Listed Type III PFD



NRS Rapid Rescuer

Type III/V PFD. With 22 lbs of flotation, adjustability to fit chest sizes from 30 to 58 inches, and all the features you will ever need in a rescue vest. Two huge front pockets stretch to hold anything from a GPS to a VHF. Three lash tabs on the front are great for a knife, whistle or anything else you need to keep handy. A D-ring, strobe holder, and tether attachment round out the attachment points on the front with a safety light stick holder on the back and reflective tape everywhere. 8 adjustment points to ensure a secure fit.

208421494	Red	170.00
208421492	Yellow	170.00



Water Rescue Tow Tether

Constructed of Heavy Duty Tubular Webbing, elastic, and steel ring. One end has a 2" ring to attach to the waist strap of Rescue PFD's. The other end is attached to a lightweight non-locking aluminum carabiner.

351101	Short Tether (35" Max)	22.00
351105	Long Tether (54" Max)	25.00





Cascade Water Rescue Helmet

Multiple impact polypropylene, patented liner system. Closed cell foam won't absorb moisture. 4 point chin strap. 13 ventilation / drain ports. Stainless Steel hardware. Colors: Red, Yellow, White. Specify Color.

48042X	Small	(21.6 - 22.25")	54.95
48043X	Medium	(22.5 - 23")	54.95
48044X	Large	(23.25" - 23.75")	54.95
48045X	XLarge	(23.75" - 24")	54.95
48046X	XXLarge	(25" - 26")	80.00

480499	Reflect. 'RESCUE' Crescent	5.00
480498	Reflect. 'WATER RESCUE' Crescent	5.00



ProTec Full Cut Water Rescue Helmet

Ideal for water rescue and water sports. Durable, extruded plastic shell. Closed cell, replaceable liner designed to drain quickly after immersion. Wrap-around design protects skull, temple area, and base of neck. Weight: 14 oz. Colors: Red, Yellow, Black. Specify Color.

480603X	Small/Medium	(20 7/8 - 22 7/8")	33.50
480604X	Large/XLarge	(22 1/2 - 24 1/2")	33.50



ProTec Ace Water Rescue Helmet

Cutting Edge Design

Features innovative pad inserts to create a top-notch swiftwater rescue helmet. Pad can be adjusted to fit a wide range of sizes. Cut over the ear for unrestricted hearing and comfort, while maintaining excellent brow and temple coverage. Colors: Red, Yellow, Fluorescent Yellow, Black. Specify Color.

480662X	Small	(20 1/8 - 20 7/8")	35.00
480663X	Medium	(21 1/4 - 22")	35.00
480664X	Large	(22 3/8 - 23 1/8")	35.00
480665X	XLarge	(23 1/2 - 24 1/4")	35.00



Helmet Liner

Much of your body heat escapes through the top of your head. Protect yourself with the NRS Mystery Side Cut Helmet Liner. Under your helmet this liner will keep you warm and comfortable. 1mm of neoprene provides the core insulation for this helmet liner. The GlideSkin™ exterior reduces evaporative cooling, increasing heat retention. Titanium laminate adhesive reflects and retains body heat for superior warmth. Lined with soft ThermalPlush™ fabric for all-day comfort.

20842026	Full Cut	20.00
20842027	Side Cut	20.00



ProTec Wake Helmet

High-density polyethylene shell for durability, and dual density foam lining for multiple-impact protection. Features a support piece for the back of the head, which also gives you a better customized fit. Attachable, low-profile perforated ear pads give extra protection and warmth without impeding hearing. Certified to EN 1385 CE helmet standards. Specify Color: Black, Yellow, Red, Blue

208420312X	Small	(20 1/8 - 20 7/8")	55.00
208420313X	Medium	(21 1/4 - 22")	55.00
208420314X	Large	(22 3/8 - 23 1/8")	55.00
208420315X	XLarge	(23 1/2 - 24 1/4")	55.00



WR7 Water Rescue Helmet w/ Vents

New Kiwi Helmet with adjustable vents to let heat and water out.

481574	Red	155.00
481572	Yellow	155.00
481579	White	155.00





First Responder Water Rescue Set

Includes equipment most often required for swiftwater rescue classes. Set includes: Universal Rescuer PFD, Protec Helmet, Swiftwater Team Member Boots, 2mm Dive Glove, Throwbag -70', Fox 40 Rescue Whistle, River Rescue Short Knife. Deluxe Set includes Water Rescue Team Member Bag (p/n 807542) and Shredder Fins.

29982001	Standard	400.00
29982002	Deluxe (Shown)	570.00

⚠ WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



Equipment not included

Water Rescue Team Member Bag

A new, versatile bag for both Surface and Dive Rescue Team Members. Manufactured with side panels of strong Vinyl Coated Nylon mesh, this bag allows for excellent content ventilation. Front panel, zippered mesh-backed pockets hold fins, gloves, snorkels, and other personal gear. Interior compartment is large enough to hold Drysuit, PFD, helmet, Boots, and throw bag. Side compression straps. Top handle and Shoulder Strap D rings. Dimensions: 26" x 18" x 10".

807542	Rescue Team Member Bag	100.00
809790	Padded Shoulder Strap	11.00



Equipment not included

Swiftwater Team Member Duffle

A tough, heavy-duty duffel. Sturdy 600 denier polyester forms the bottom and ends of the bag to protect your gear from sand and grit, and will endure years of abuse. High-strength mesh allows wet gear to dry, reducing mildew other moisture-related problems. Color: Blue.

807241	Large (30" x 16")	37.50
807231	Medium (24" x 12")	31.50



Heavy-Duty Dry Bag

The standard in heavy duty, large dry bags. Now with the most comfortable shoulder straps ever. PVC/polyester body plus a 34 oz. bottom panel extending 3" up the sides for incomparable durability. Size: 33"H x 16" dia. Color: Red.

20842903	H.D. Dry Bag	70.00
----------	--------------	-------



Dry Bag

Tough 21 oz. PVC fabric makes this bag the ideal storage system for rescue equipment. Bag handle and straps are welded to the bag with a heavy-duty double patch system. StormStrip Closure ensures the most waterproof seal on the market. Dimensions: 25" x 14".

208429106	Dry Bag (Blue)	57.00
208429102	Dry Bag (Yellow)	57.00
208429104	Dry Bag (Red)	57.00





Rescue Wetshoe

Simple, sturdy, dependable. 5mm comfort insole and 2mm plastic midsole. Zippered entry. Manufactured from 3mm neoprene. Sole is wrapped with heavy duty traction pad. Toe and heel cup offer extra protection. Sizes: 4 - 15 (whole sizes only, 1/2 sizes order next larger size). Color: Black. Specify Size.

20842310-XX Size 4 - 13 32.00
 20842310-14 Size 14 33.00
 20842310-15 Size 15 33.00



ATB Dive / Rescue Boot

All Terrain Bootie combines the comfort of a sneaker with the warmth of a wetshoe. Full molded, arched sole is reinforced with a 2mm plastic midsole shim to increase stability and comfort. 7mm neoprene cushion insoles and 5mm uppers with glued and blind-stitched seams. Heel and toe caps protect from abrasion. Zippered opening. Sizes 6 - 13 (whole sizes only, 1/2 sizes order next larger size) Color: Black/Gray

20842335-XX ATB Dive / Rescue Boot 51.00



Swiftwater Team Member Workboot

Used by rescue groups and Navy SEALS. 3mm Nylon II neoprene sock. Rubber outsole and EVA midsole with super-grip sole. Brushed rubber toe and heel cap with synthetic leather upper. Parachute 550 cord boot lace and Velcro® cinch strap. Water purge at instep protected by screened metal eyelet. A definite improvement over "Tennis-Shoe" sole workboot design. Whole Sizes: 7 - 15.

237093751-XX Swiftwater Team Workboot 63.00



Water Tech Rescue Glove

Developed for rescue professionals who spend most of their working hours handling rope and rigging systems. Aramid fiber patches on the palm and fingers for superior durability. Padded knuckles and back protect hands. 2mm neoprene back maximizes warmth, while synthetic leather palms limits slip and enhances dexterity. Wrist openings cinch with elastic hook and loop band. Specify Size: S, M, L, XL, XXL.

20842439X Water Tech Glove 42.50



Warm Water Dive / Rescue Glove

1.5mm short cuff neoprene glove stretches to keep you in touch with your equipment. Durable GripCote™ palm ensures a solid grip and improved performance. Wristband helps seal our water. Specify Size: XS, S, M, L, XL, XXL.

20842417X Warm Water Glove 23.00



Lightweight Water Rescue Glove

Lightweight, durable glove for all rescuers. 2mm Neoprene on back for lightweight comfort & protection. Palm and fingers of reinforced Amara for durability. Stretch elastic band with Velcro closure. Specify Size: XS, S, M, L, XL, XXL.

23703341X Lightweight Water Glove 21.50

⚠ WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



Rocket Fin

Quick-Release Strap

One of the first vented rubber fins available. Traditional all rubber design. Popular with military and professional divers.



2370621110

100.00



Shredder Rescue Fins

Fits over Swiftwater Rescue Boots

Ultra-Light technopolymer optimizes power with up to 50% less weight and bulk. Blade design improves thrust and reduces ankle and leg fatigue. Adjustable buckle with quick-release system secures fins even in swiftwater. Designed to fit all large dive / rescue style boots.

46005342	Yellow/Black	70.00
46005341	Black	70.00
46005349	Replacement Strap	15.50



Universal Rescue Fins

Designed to meet the demands of swiftwater rescue professionals, the Universal Swim Fins also work well for riverboarding and general river snorkeling. These rigid fins are symmetrical so they fit either foot. The wide heel strap is adjustable with a quick tug of the strap end, then you can unclip the strap and your adjustment stays put. The toe piece has a removable rigid insert that lets you select the stiffness you desire. The fins will fit over your river boots - just step in, click in the heel strap and you're ready to go!

20841897

47.00

Inflatable Rescue Board

The NRS Inflatable Rescue Board meets the tough demands of the swiftwater rescuer. Lightweight, stowable, versatile - it's built to last.

- Inflatable design is easy to stow and transport into the field.
- Top is made of rugged 840-denier urethane coated nylon for durability.
- Reinforced PVC bottom is slick and abrasion resistant. Sculpted design aids control and wave riding.
- Two inflated "skegs" add directional stability and control.
- The durable urethane bladder is inflated with a top quality Leafield C-7 Valve.
- Two sets of heavy-duty handles assist the rescuer and victim.
- The 3" D-ring attachment on the nose is massively reinforced to take the strain of towing and lowering.
- Bright colors and large "RESCUE" lettering improve rescuer's visibility.
- Board is 30" W x 58" L

20841868 Inflatable Rescue Board 225.00



LifeSled®

PWC Towable Rescue Board

Designed for Ocean, Swiftwater and Ice Rescue where a towed board is essential. Severe-duty 3-point non-invasive hookup system with replaceable components. Over 450 lbs. of deadweight buoyancy. Ten fiber reinforced, tacky-when-wet handles are anchored internally. Stows "folded-over" PWC when not in use. Dimensions: 62" x 36" x 4.52". Weight 38 lbs.

351511	LifeSled	1,100.00
351503	Rescue Sled Storage Bag	105.00

Carlson Rescue Board

Lightweight & Maneuverable

For recreation or rescue. Solid Ethafoam with a slick bottom for performance and durability. (3-year warranty against delamination) Oversize Shipping Charges Apply. Color: Black

20841870 Carlson Rescue Board 410.00





Ring Buoy USCG Approved

Unicell soft foam. Won't rot or water log. Diameter: 24". Complete with grab lines. Color: Orange.

460008	Ring Buoy, 24"	70.00
460008-060	w/ 60 ft. Tether	85.00
460008-100	w/ 100 ft. Tether	90.00
460008M	Ring Holder	15.00



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



Rescue Tube

Yellow vinyl coating for great visibility and lightweight foam body for handling comfort. 3" x 36" with soft, nylon rope and one-piece body belt. USCG approved bronze snap hook.

460001	Rescue Tube, 40"	65.00
--------	------------------	-------



Rescue Can

Features hand grips that are secure and comfortable to grasp and help to calm a panicky swimmer. High visibility Bright Day-glow Orange color. Dimensions: 27.5 x 8.5 x 6". Weight: 4 lbs.

460005	Rescue Can	80.00
460006	Rescue Can, Max Flotation	85.00
460005R	Rescue Can Rack	50.00
460006R	Rescue Can Rack, Max Float	50.00

LSP Cinch Collar

Easy to use - The victim simply enters the harness with head and arms extended before tension is applied by the rescuer. The victim's weight will release the connector and allow the collar to cinch around him, preventing him from slipping out in the event he becomes unconscious. Durable-The interior of the Cinch is a non-absorbent, closed-cell foam. The outer covering consists of a tough, stain-resistant, washable Cordura which provides protection and comfort to the victim.



21542010	LSP Cinch	280.00
----------	-----------	--------

Zipper Lubricant

Lubricates and prolongs the life of zippers on wetsuits, drysuits and booties.



20842288	Zip Tech	6.50
----------	----------	------

Ice Anchor

Super Corrosion Resistant

Plated CrMo tubes with high strength hangers are the ideal anchor tool for ice rescue. Speed Grinder knob system makes placing these screws a breeze.



46001917	6.8" (17 cm)	47.00
46001922	8.8" (22 cm)	47.00

Wetsuit Shampoo

Complete, scientifically balanced maintenance system for all neoprene and water sports gear. Ideal for wetsuits, drysuits, boots and gloves, fishing waders, orthopedic supports, lycra body suits and more. Leaves neoprene articles free of organic residue, chlorine and salt deposits. Chlorine-removing agents and conditioners help prevent premature aging and oxidation.



20842249	Gallon	39.95
20842248	8 oz.	6.00

Zipper Care

Zip Care is the ultimate zipper care for plastic, nylon or metal zippers. Unique push-pull brush top enables the cleaner to be delivered between the teeth and physically removes harmful dirt, sand, and salt deposits that can jam the zipper. Cleans drysuits and wetsuit zippers. Mild lubricant without silicone.



20842290	Zipper Care	5.00
----------	-------------	------



Dive Mask Training Blackout Cover

Finally, a reusable Diving Mask Cover that works. Made from tough, coated nylon fabric and elastic drawstring adjuster. Can be easily removed in an emergency situation. Excellent access to nose cup for clearing ears.

460101 Mask Blackout Cover 10.00

Sea Gold Anti Fog Gel

Rated BEST Anti-Fog by Rodale's SCUBA DIVING Magazine! The clear choice in anti-fog gels. Our unique clear formula means long lasting anti-fog protection. Sea Gold is highly concentrated and designed for quick, simple, in-field application. Sea Gold is safe for all glass and plastic lenses and will not harm surrounding silicone or rubber support frames. Not recommended for swim goggles.



238140851 Sea Gold, 1.25 fl oz. 5.50



Aquaseal Wetsuit Repair Adhesive

The industry standard for maximum strength repairs to wetsuits, dry suits and all water sports products. Flexible urethane formula waterproofs, seals and protects against abrasion. Hundreds of water sports and household uses. Flexible Urethane formula that waterproofs, seals and protects against abrasion.

2282572 Aquaseal, 1 oz. Tube 7.00



Maui Dive Mask

Low volume, single window design. Black Silicone Skirt. Popular Mask for military and Professional divers.

2370503350 60.00



Seal Swim Mask

This is the mask that revolutionized the water industry by adding fit, functionality, and comfort to aquatic eyewear. Patented curved lens provides 180-degree peripheral vision without distortion. Dive quality silicone skirt provides a comfortable watertight fit. 100% UVA and UVB protection.

46010201	Clear Lens	34.00
46010209	Photochromic Lens	35.00

Military Flex Snorkel

Classic neoprene rubber design with flex tube. Used by military units worldwide for its versatility and performance. Ideal for rescue and recover dive teams. Includes keeper for mask strap.



23706930 17.25

Impulse 3 Flex Snorkel

Improved and streamlined. Patented Impulse Dry™ valve stops water from entering the snorkel. Large bore contoured barrel for unrestricted breathing. Self-draining purge valve for use when switching from scuba to snorkel. Pure soft silicone patented Comfo-Bite™ mouthpiece. Includes snorkel keeper.



4601053 Impulse 3 Snorkel 35.50



Training Weights

Rescue Diver training aid requirement. Solid rubber. For pool skills training for divers. 5" Donut rings may be used for assorted training exercises.

4600161	Block, 10 lb. (each)	45.00
4600162	Donut, 5 lb. (each)	12.00



Ankle Weights For Use with Drysuits

Fully adjustable length with quick-release buckle for safety. Neoprene. Sold in pairs. Color: Black

4600153	3 lbs., Pair	35.00
---------	--------------	-------

Flammable - UPS ground only.





River Rescue Short Knife

Features quality 420 Stainless Steel 3" blade with serrated top edge for rope cutting, blunt chisel tip and line cutter. Molded Grip and sheath. Blade Shank protrudes past handle end to allow use as striking tool. Dimensions: 6.75 x 1.25" Weight: 4 oz.

6301200	Orange	24.00
6301202	Yellow	24.00
6301201	Black (not shown)	24.00



Dive Rescue Shears

Great for Rescue Diver Safety

EMT Shears in a Pouch that secures to BC Shoulder Strap or autoinflator hose. Includes Stainless Steel 7.5" EMT shears and adjustable pouch.

630111	Dive Rescue Shears	15.00
--------	--------------------	-------



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



Blue Tang Dive Knife

The Blue Tang is a full size, rugged, multifunctional knife designed to meet the basic needs of every diver. Features Power Grip, hooked edge line cutter, 5 inch hollow ground double edge blade. Blunt tip and Steel end cap makes the Blue Tang the perfect work tool for Dive/Rescue. Dimensions: 9.5 x 2.2". Weight: 9 oz. Color: Black/Yellow.

630125	Blunt Tip	58.00
630126	Drop Point	58.00

Fusilier Rescue / Dive Knife

This full feature knife is the perfect knife for rescuer/divers who do not want to carry a big knife. It is small, lightweight and designed to fit every diving style. Features: Power Grip, Serrated Edge, Hooked Edge 4 inch double edge hollow ground blade, One Hand insertion and removal. Dimensions: 8 x 1.7". Weight: 6 oz. Color: Black/Yellow.

630122	Fusilier Rescue / Dive Knife	52.00
--------	------------------------------	-------



a.



b.



Squeeze Lock Knife

A classic dive knife. Blade made from 304 stainless steel or high grade Beta Alloy Titanium. Patented Locking mechanism securely locks knife in sheath, but releases easily with a squeeze of the handle. Included mounting components allow the knife to be mounted to grommets, hose straps, or belt. Sheath has molded strap slots for use hose mounting straps. Length: 6.5" Overall; 3" Blade.

a. 23704752	Stainless Steel Blunt Tip	40.00
b. 23704852	Titanium Tanto Tip	60.00

Pilot Knife

Rescue professionals will really love the features of the Pilot Knife. Features both smooth and serrated sections plus a rope cutting hook. The blunt tip design protects against unintentional punctures! The unique sheath firmly locks the knife in place and only lets it go when you squeeze both sides of the release. Contoured handle and rubberized grip. Clip on sheath attaches firmly to PFD lash tab. Built in glass breaking tip on the end of handle. Length: 7.25" Overall; 3" Blade.


208427550	Orange	34.00
208427551	Black	34.00



Super Hanger

Useful and economical for hanging a variety of dive equipment.

Dimensions: 9" x 16.6 x 1.2".



460012 Super Hanger

6.50



FOX Whistle

One of the loudest whistles available. "Pea-less" design functions when wet - even under water.

Color: Orange, Yellow.

2282465X	Fox 40 Whistle	6.00
2282464X	Fox Mini Whistle	5.50
2282469X	Fox 40 w/ Coil	6.75
2282468X	Fox Mini w/ Coil	6.00

Super B.C. Hanger

Keeps Expensive equipment off the floor for proper drying and storage. Supports up to 20 lbs.

Dimensions: 10" x 16" x 1.2".



460010 Super B.C. Hanger

8.00



Dive Rescue Search Line

Special 6mm Search Rope reduces resistance and drag as diver works search pattern. Kernmantle design virtually eliminates kinking found in monofilament "tow-line" braid. High quality bag carries 200 ft. of search line. 6mm Rope Strength: 600 lbf.; 8mm NFPA Throwline Rope Strength: 3,699 lbf.

460022	6mm, 200'	52.00
460122	8mm, 200'	190.00

Super Accessory Hanger



Ideal for drying and storing gloves, booties and hood. Dimensions: 13" x 20" x 1.2".

460011 Super Accessory Hanger

13.00

Drysuit / Exposure Suit Hanger

Wide 4.5" hanger "arms" for ultimate protection of expensive Drysuits and Exposure suits.

Dimensions: 15" x 16" x 4.5".



460013 Drysuit Hanger

28.00



Waterproof Radio Pouch

Waterproof to 30 ft.

Total watertight protection, effectively and inexpensively, to hand-held VHF/UHF radios. Waterproofs your radio in seconds. Will float with radio inside. No loss of signal. Salt-water proof. UV-Stabilized. Operating temperatures: -25°C to +90°C. Complies with SOLAS.



Pelican Float Marker Recovery System

Reusable Buoy made of structural foamed resin. Includes over 100 ft. polyethylene 225 lbs. test line. Includes 6 oz. non-drag dispatchable anchor. Color: High-visibility yellow with day-glow rings. Weight: 16 oz.

460020 Pelican Float

43.00

811139	Standard, 13 x 3.9 x 6.9"	26.00
811149	Large, 15.7 x 5 x 7.9"	26.00



RescueTECH Throw Bags**Complete with Throwline and Ready to Use**

Our Water Rescue Throwbags have been completely redesigned to give more features and make them easier to use. All bags utilize our Progressive Sewing Technology to give greater strength and resistance to abrasion. All ropes float - even when wet.

All of our bags feature:

- Double Stitched Seams
- Reinforced Bottom Seams
- Quick-Adjust Bucket Handle
- Drawstring with Durable Cord-Lock
- Drainage Grommets

Standard Water Rescue Throw Bag

Standard bags are manufactured with a urethane-coated 400 Denier water-resistant nylon for superior abrasion resistance.

	Description	Length	Strength	Rating	Weight
598301050	3/8" Pro-Poly	50'	2960 lbf.	Throwline	2.5 lbs. 45.00
598301070	3/8" Pro-Poly	70'	2960 lbf.	Throwline	3.5 lbs. 57.00
598301100	3/8" Pro-Poly	100'	2960 lbf.	Throwline	4.5 lbs. 76.00
598302035	3/8" Standard Poly	35'	1900 lbf.		1.0 lbs. 26.75
598302050	3/8" Standard Poly	50'	1900 lbf.		1.25 lbs. 29.95
598302070	3/8" Standard Poly	70'	1900 lbf.		2.0 lbs. 36.00
598302100	3/8" Standard Poly	100'	1900 lbf.		3.0 lbs. 48.00
598303050	8mm NFPA	50'	2700 lbf.	Throwline	1.2 lbs. 61.95
598303070	8mm NFPA	70'	2700 lbf.	Throwline	1.7 lbs. 80.00
598303100	8mm NFPA	100'	2700 lbf.	Throwline	2.1 lbs. 117.00

**Deluxe Water Rescue Throw Bag**

The Technical bags give the rescuer a top of the line throwbag. Manufactured of 1000 denier Cordura in the bottom end and 400 denier in the sides and open end. The "Tech" bag also features Reflexite retro-reflective trim and elastic lightstick holders.

	Description	Length	Strength	Rating	Weight
598311050	3/8" Pro-Poly	50'	3500 lbf.	Throwline	2.5 lbs. 55.00
598311070	3/8" Pro-Poly	70'	3500 lbf.	Throwline	3.5 lbs. 67.00
598312035	3/8" Standard Poly	35'	1900 lbf.		1.0 lbs. 37.00
598312050	3/8" Standard Poly	50'	1900 lbf.		1.25 lbs. 40.00
598312070	3/8" Standard Poly	70'	1900 lbf.		2.0 lbs. 46.00
598313050	8mm NFPA	50'	2700 lbf.	Throwline	1.2 lbs. 70.00
598313070	8mm NFPA	70'	2700 lbf.	Throwline	.7 lbs. 88.00



Tech Bags Include Reflexite™ retro-reflective stripes, Grab handles and Lightstick holders.
(Lightstick not included.)

RESCUE STICK**Throwable Emergency Rescue Inflatable**

Incredibly easy to use, the Rescue Stick™ provides rapid flotation assistance to a person at risk of drowning. Simply remove the baton shaped Rescue Stick™ from its waterproof bag and throw near the person. Once contact is made with the water it inflates in seconds to a large horseshoe shape keeping them afloat and their head above water until help arrives. Measuring only 14" in length and weighing 15.5 oz., the Rescue Stick™ is the most versatile rescue flotation device available. Easily stowed in a boat, vehicle, backpack or by the pool it will be accessible when and where you need it. The Rescue Stick™ is an invaluable tool for first responders to provide emergency flotation when no water rescue gear is available.

2049101	Rescue Stick	150.00
2049103	Rescue Stick, Training Model	75.00
2049105	Rescue Stick Rarm Kit	35.00



Pro-Poly™ Water Rescue Rope**100% Polypropylene**

Kernmantle construction. Smooth sheath construction. Used in our Water Rescue Throwbags. Floats on top of water. Not recommended for rappelling or other heavy uses. Color: Yellow w/ Red & Blue Stripes



a.

b.

c.

d.

e.

f.

7/16" Water Rescue Rope

A special hybrid filament water rescue rope. Manufactured with a durable nylon sheath and a Multi-Filament Polypropylene core, this floating rope has a tensile strength of 5,000 lbf. Color: Yellow w/ Red Stripes and Yellow w/ Blue Stripes

8mm NFPA Throwline

UL Certified to NFPA 1983. Double braid construction of high strength core fibers covered in polypropylene to create a floating rope that meets the required strength specifications. Bright Yellow Color w/ Red Stripes.

3/8" Standard Poly Throwline

A throwline that gives rescuers an economic choice from the high-tech lines. Soft and easy to stuff and throw. 100% polypropylene solid braid.

Stock Number	Description	Dia. (in.)	Strength (lbf.)	Color	Wgt. per 100 ft. (lbf.)	Rescue Rope Rating
a. 516600	Pro-Poly	3/8	2,960	Yellow w/ Red/Blue	3.5	0.50
b. 516700	Pro-Poly	1/2	3,400	Yellow w/ Red/Blue	4.2	0.59
c. 50517000YR	Water Rescue	7/16	5,000	Yellow w/ Red	5.4	0.77
d. 50517000YB	Water Rescue	7/16	5,000	Yellow w/ Blue	5.4	0.77
e. 50528000	NFPA Throw	5/16	4,000	Yellow w/ Red	1.9	0.85
f. 230327000	Standard Poly	3/8	1,900	Yellow/Red	2.5	0.26

**Line Reel**

Reel features lightweight, maintenance-free pvc pipe, a clutch to lessen backlash, removable handle, floating line, neck strap, and stainless steel snap. Line Diameter: 1/4".

460260 600 ft. line 18 lbs. 350.00
460280 800 ft. line 20 lbs. 360.00

Water Rescue Jaws

With Water Rescue Jaws, you can:

- Probe in deep water with the 18 foot telescoping pole.
- Search effectively in open water.
- Search effectively in muddy water.
- Search through ice.
- Search through slow currents.
- Retrieve a victim without the threat of puncturing skin.
- Store easily in a 24" by 72" area.

2414103 195.00


**Pick of Life Ice Awls**

Pick-of-Life awls are for self-rescue, allowing you to crawl on top of the ice using the picks as traction. You can also slide them to someone who has fallen through the ice.

208422459 19.95




100

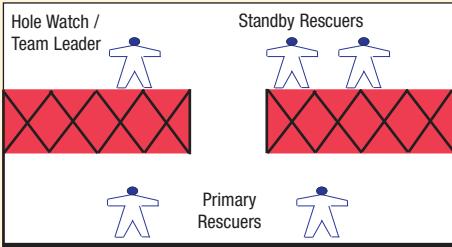

Rescue Comm Kit 1

Configured for a team of five rescuers consisting of two primary entrants, two standby entrants and a safety attendant. Includes 100' of cable for each entrant (expandable to 1500 ft.). System can be configured for up to ten people using available modules and accessories. Weight: 49 lbs.


304011P Rescue Kit 1, Power Talk 8,000.00

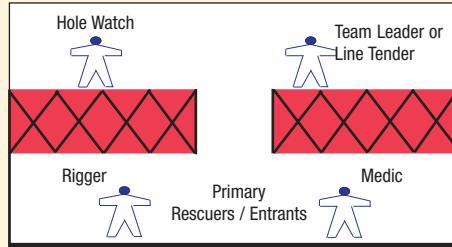

Rescue Comm Kit 2

Configured for a team of four people consisting of two entrants, a safety attendant and a team leader. Includes 100' of cable for two entrants (expandable to 1500 ft.). System can be configured for up to ten people using available modules and accessories. Weight: 40 lbs.

304012 Con-Space Rescue Kit 2 6,000.00

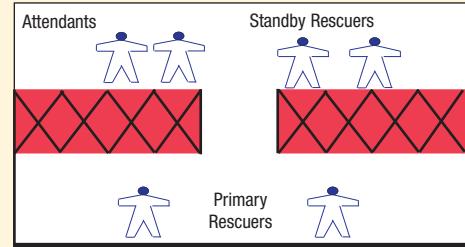

Rescue Comm Kit 5

Configured for a team of six rescuers consisting of two primary entrants, two standby entrants and two attendants. Includes 100' of cable for each entrant (expandable to 1500 ft.). System can be configured for up to fourteen people using available modules and accessories.

304015P Rescue Kit 5, Power Talk 9000.00



Victim Locator Kit

Confined Space Rescue Probe

For structural collapse - includes the unique CON-SPACE Rescue Probe designed to detect and communicate with victims trapped in collapsed structures. Intrinsically Safe Approved.

30310031 Victim Locator Kit 3 025 00



USAR Task Force Communication Kit

A multi-use Urban Search and Rescue Task force Kit designed to meet the needs of Confined Space, High Angle, Structural Collapse, Victim Location, Shoring, Tunneling and Trench Rescue. The USAR Kit can be configured according to the type of rescue involved, so whether it's a two-in-two-out or a five person Search and Rescue team this kit has you covered. Intrinsically Safe.

3034055 USAR Task Force Comm Kit 17,185.00



Bomb Disposal Kit

Private communications for team of 3 Bomb Specialists wearing Face Shields and Full Body Armor. System is NON-RF emitting - conforms to MIL-STD 461. Intrinsically Safe Approved.

30310030 Bomb Disposal Kit 3,800.00



Cable and Accessories

30204050	50' w/ Connector	238.50
30204100	100' w/ Connector	400.00
30311050	50' w/ Strain Relief Hook	270.00
30311100	100' w/ Strain Relief Hook	435.00



Hose/Cable Umbilical

Zippered in Multiple Colors

New style zippered hose / cable protections. Four colors to allow accurate selection of hose/cable/lifeline combinations.

50 Foot

303010501	Black	95.00
303010500	Orange	95.00
303010502	Yellow	95.00
303010506	Blue	95.00
303010504	Red	95.00

100 Foot


303011001	Black	190.00
303011000	Orange	190.00
303011002	Yellow	190.00
303011006	Blue	190.00
303011004	Red	190.00



Cable / Air Hose Reel

Communicate while reeling in or out. Cable is fully protected, easily handled, and safely stored. Cable & Hose not included.

30120520	200 ft. Reel with Wheels	2,000.00
30120530	300 ft. Reel with Wheels	2,100.00
30120225	250 ft. Reel	900.00
30120250	500 ft. Reel	1,000.00

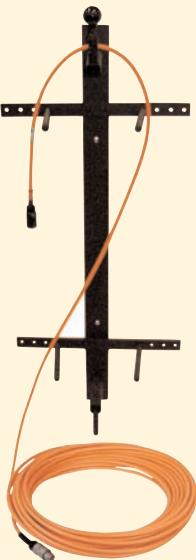

Con-Space Cable Coiler

Coils your CON-SPACE Hardline Communication Cable through a unique figure 8 looping system that allows for simple, untangled deployment in the field. Cable not included. Dimensions: 32" x 14". Creates coils that are 29" x 7"

30301040 Con-Space Cable Coiler 90.00



Con-Space Cable Bag

Stores and allows for easy transport of your Hardline Cable. Holds 100 ft. - 300 ft. of Con-Space Cable. Cable not included. Dimensions: 32"l x 11"w x 6"h.

30303007 Con-Space Cable Bag 85.00





RAMFAN UB20 Blower System

Provides the industry's highest certified CFM for either exhausting or discharging air with 8" duct. Easily attached 15 - 25 ft. duct canister works at either end or both ends.

The UB-20 has RAMFAN's uniquely designed turbo blade which creates a straight, non-spiraling airflow. Motor: 1/3 hp, 60 Hz, 115 - 230 VAC, 2 amps. Optional DC motor. Manufactured of Double Wall lightweight, rugged polyethylene. Blower Dimensions: 13" h x 12" w x 13" d. Blower Weight: 16 lbs.

Airflow:

	Freeflow	1-90°	2-90°
	980 cfm	789 cfm	666 cfm

3270015	Blower w/ 15 ft duct AC	617.00
3270025	Blower w/ 25 ft duct AC	643.00
329015	Blower w/ 15 ft duct DC	633.00
329025	Blower w/ 25 ft duct DC	660.00
325508	Blower ONLY, 115 v AC	382.00
329002	Blower ONLY, 12 v DC	398.00
3203605	Battery Connector, 5 ft.	52.00
32034214	UB20 Battery Pack Charger	808.00

Performance measured by CEESI.



Saddle Vent Blower System

Complete Confined Space System

Ready-built system for your confined space team. Available with Standard UB20 Blower or UB20XX Extreme hazard Blower and 5 ft. and 15 ft. duct. 327025S 20' System 1,402.00 327025XS 20' Hazard System 2,947.00



RAMFAN UB20XX Extreme Hazard Blower

Same high quality blower mechanism as the standard UB20 with a conductive housing and duct. When properly grounded, the system virtually eliminates static discharges. Manufactured with Anti-Static housing. Totally enclosed hazardous location motor rated UL Class I, Group C,D; UL Class II, Group E,F, G. 30 ft. Cord w/ power switch. Plug not included. Blower Dimensions: 13" h x 12" w x 13" d. Blower Weight: 21 lbs.

3270115	UB-20XX w/ 15 ft duct AC	1,920.00
3270125	UB-20XX w/ 25 ft duct AC	2,057.00
3270102	UB-20XX Blower ONLY	1,375.00

Performance measured by CEESI.



UB20 Heater System

A complete system to warm your atmosphere. Produces 55,000 BTU's to easily heat confined spaces, tents, shelters, Decon Areas. System Includes: UB20 Blower, Heater Unit, 25 ft. of 8" duct, and LP regulator w/ 12 ft. LP Hose.

32037125 UB20 Heater System 3,023.00




RAMFAN EFi75

12" High Output Blower

RAMFAN combines aerospace fan design with high-strength polymers to produce a rugged high output portable blower for confined space and hazardous ventilation. Glass-reinforced Double Wall ABS housing handles the bumps and falls of the job site. UL listed motors. Advanced blade design increases head pressure and provides the power you need to meet difficult to ventilate conditions. Extreme Hazard Models constructed of carbon-reinforced ABS rated UL94HB. Resistivity: 100k ohm or less. Rated Class I, Group D, Class II, Group E, F, G. Supplied with junction box (no cord/no plug). Dimensions: 16" x 15" x 15". Weight: 38 lbs.

Airflow (cfm):

	Freeflow	Straight	1-90°	2-90°
	2500	1743	1664	1529
327512	12" Blower			970.00
327512X	12" Extreme Hazard			1,798.00
3210112	12" to 8" Duct Adapter			135.00

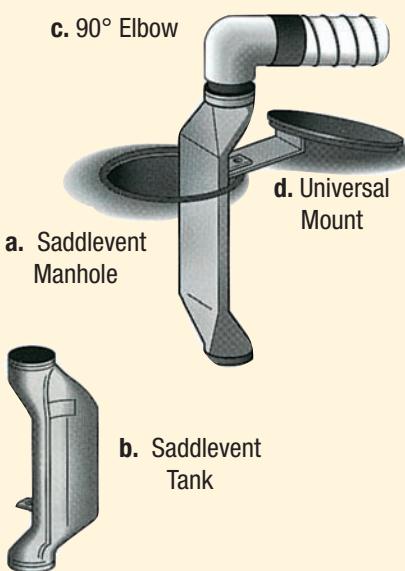

Saddle Vent

For Use With 8" Duct

a. 3220189	Manhole, Std	250.00
b. 3220189T	Tank	295.00
c. 3220190	90° Elbow	70.00
3221190X	90° Elbow, Conductive	70.00
3220190T	90° Elbow, Tank Style	75.00
d. 322098	Universal Mount	45.00
3221189X	Manhole, Conductive	250.00


Performance measured by CEESI.



Technical Rescue Air Cart

Simultaneous Respirator and Air Tool Operation

Separate high (275 psi) and low (125 psi) pressure regulated air systems. Additional high pressure inlet port allows connection to outside air source for extended use applications. High pressure isolation valve and toggle switch allows user to switch between common or isolated air sources. Operable via cylinder air or mobile air truck. The system includes two connecting hose whips with bleed valves and inline check valves, adjustable heavy duty high flow pressure regulator with relief valve, dual pressure gauges for cylinder and outlet pressure readings, low cylinder pressure alarm, breathing air manifold with quick-disconnect Hansen couplings. 275 psi or 125 psi pressure relief valve. 3 way selector valve allows operation with left cylinder, right cylinder, or High Pressure Inlet. Dimensions: 35" H x 20.5" W x 15" D. Weight: 54.5 lbs (without cylinders). Respirator Regulator: 0 - 5500 psi inlet; 0 - 125 psi outlet. Tool Regulator, High Pressure: 0 - 6000 psi inlet; 0 - 275 psi outlet. Tool Regulator, Low Pressure: 0 - 300 psi inlet; 0 - 125 outlet. Flow Rate: 80 cfm @ 120 psi. Outlet Fittings: four (4) 1/4" Quick-Disconnect Fittings. Accepts cylinders up to 4500 psi pressure rating.

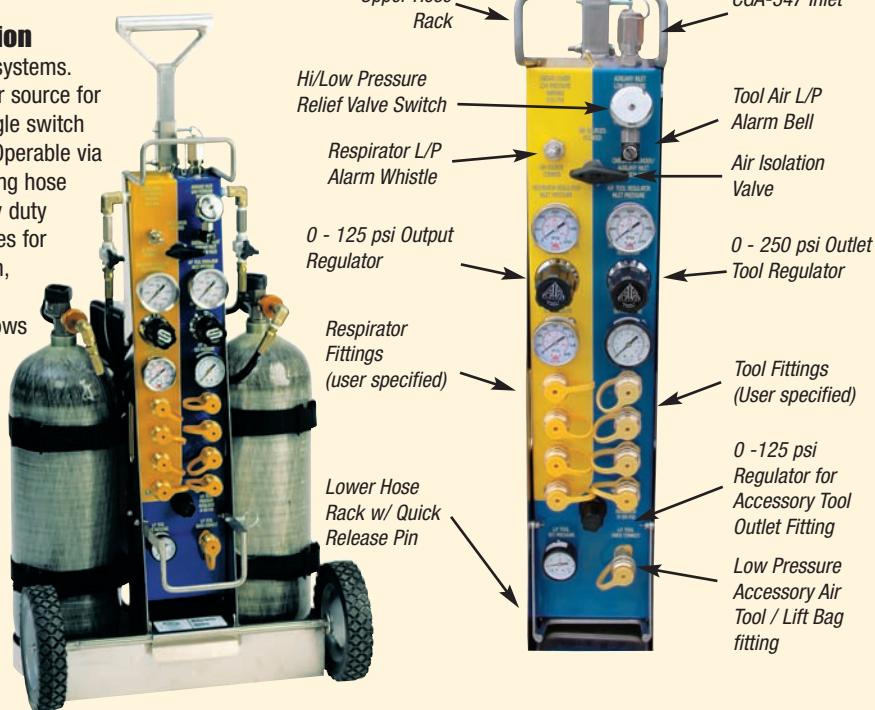

2009114H	Technical Rescue Cart, 1/4" Hansen Fittings	2,995.00
2009225	25 ft. High Pressure Connect Whip (for Cascade)	320.00
2009119	Cart Cover	206.00

Exceeds NIOSH guidelines for point of attachment.

Air Supply Hose

High quality air supply hose with Hansen fittings to fit the Technical Rescue Air Cart.

20095457H	50 ft.	105.00
20095458H	100 ft.	184.00



RAMFAN Accessories

8" Duct

320815	Standard Duct, 15 ft.	143.00
320825	Standard Duct, 25 ft.	210.00
320815C	Conductive Duct, 15 ft.	220.00
320825C	Conductive Duct, 25 ft.	330.00
3210108C	Duct Coupler, 8"	35.00

12" Duct

3211215	Standard Duct, 15 ft.	233.00
3211225	Standard Duct, 25 ft.	388.00
3212215	Conductive Duct, 15 ft.	393.00
3212225	Conductive Duct, 25 ft.	758.00
3210112C	Duct Coupler, 12"	45.00

321014	Storage Bag, 8" x 15'	35.00
321015	Storage Bag, 8" x 25'	45.00
321012	Storage Bag, Medium Fits: 12" x 15'/25'/15' Cond.	35.00
321013	Storage Bag, Large Fits: 12" x 25' Conductive	41.00



Spectrum Pressure Demand Airline Respirator With Escape cylinder

Complete low profile airline respirator to meet NIOSH requirements. Excellent visibility. Respirator includes: Full Facepiece, First and Second Stage Regulator Assembly, Harness Assembly with a 10 minute ESCBA cylinder. Add air supply hose and system constitutes a NIOSH Approved respirator. Excellent for work in confined space and IDLH environments.

20092110H	Respirator, Hansen	1,490.00x
-----------	--------------------	-----------



Power Articulating Camera Head



Electronic Power Articulation Controls



Microphone

Thermal Imaging Camera



Vision Stick Color / Thermal Imaging Camera Head



Headset
(Included w/ Sound Systems)



Vision Stick™ Rescue Video System

For USAR, Haz-mat and Fire Rescue

- * Forward Viewing
- * Power Articulation
- * Focus optimized for 3-4 feet
- * Fits easily into small diameter holes

Specifications

Camera	Color, 1/4" Sony Super HyperCAD™ Sensor
Head Diameter	1.5"
Sensitivity	0.5 LUX 380 TV Lines resolution
Illumination	High output white LEDs
Image Orientation	Variable, easily changed so image is always up right
Articulation	+/-90° Remote Power Articulation, controlled from ring on proximal end of probe. Direction indicator lamp indicates when unit head is in line with probe.
Sealed	Sealed Liquid tight for gasoline and aqueous liquids
Pole Lengths	5 ft. to 12 ft. (standard) 7.5 ft. to 20 ft. (special order)
Pole Construction	Fiber Glass with Quick Lock Cuffs.
Cabling	Internally wired probe. Short External coiled cable to Display / Power module avoids tangling. 5 ft. extension supplied.
Sound	Microphone located in LED Array. Earphones connected to display power module. <i>(Included on "Sound" models only)</i>
Display	3.5 LCD High Bright Monitor
Battery Life	2 Hours Continuous Use

2375111	Vision Stick "V" Series, Color w/ Sound	6,289.00
2375113	Vision Stick "V" Series, Black/White Infrared w/ Sound	6,289.00
23752115	Vision Stick Dual, Color/Infrared	6,315.00
23752116	Vision Stick Dual, Color/Infrared w/ Sound	6,777.00
2375183	Replacement Battery	125.00

Vision Stick™ Rescue Video Color / Thermal Imaging

Color and Thermal Imaging Cameras on One Unit

One forward-viewing thermal imaging camera and one forward viewing color camera with white light illumination, integrated into a single camera head. The Vision Stick comes complete with an easy access control pad for viewing and control options. Electronic controls provide ability to control the power articulation of the camera head form the base of the pole.

Built-in omni-directional microphone.

Length: Adjustable from 57" - 10'6".

Weight: ~4.3 lbs..

Head diameter: 2". head Length: 6.5".

Camera Articulation: 180° total (90° from center).

2375120 Vision Stick, Thermal/Color 19,692.00





SEARCHCAM 2000®

The entire system consists of: the probe, video monitor, headphones with boom microphone, sun shield, lanyard, two batteries, battery charger, field maintenance kit, operations and maintenance manual, and carry/storage case. The components are stored in one Pelican®, foam lined, high impact plastic, water and dust tight, carrying case with wheels. The packed unit weighs 59 pounds (26.8kg).

- High Resolution Color Camera
- Acoustical Search Microphone
- Speaker
- Variable Intensity Illumination
- Articulated Head
- Remote Control

21709920002 Probe w/ Audio 13,800.00
21709920001 Probe 12,000.00

21709920101 Victim Simulator 230.00



Shown with sunshield*

SearchCam Recon II®

The Recon II provides rescue squads with a general purpose camera system that is tailored to the task typically assigned to the rescue squad. The Recon II enables rescue squads to perform limited visual search through multiple debris layers, as well as victim observation after the Search Team has moved on to other locations. The Recon II is small enough to be easily maneuverable in the rubble, yet will extend long enough to be effective for multi-floor search operations. Effective viewing distance is as close as a few inches to over 10 feet (3 m) in total darkness. Compatible with all Searchcam 2000 accessories and batteries.

- Color Camera with DSP Color Control
- 5" LCD Detachable Display
- Integrated White LED Illumination
- 180 degree Manual Articulating Head
- Telescoping Probe (31" to 45")
- Lightweight: 4.5 lbs with Display
- Rechargeable Batteries with Minimum
- Run Time: Two Hours at Full Load
- Works with Searchcam 2000 Accessories

21709920101 7,000.00



SearchCam SearchTIC® Thermal Imaging Camera

Full 5" display for large detail filled images. BlueLife™ image colorization displays skin temperatures in brilliant Blue to aide in rapid detection of victims. Integrated digital compass, displays viewing direction on-screen to assist in pinpointing a victim's location for rapid rescue. Digital zoom (2x) allows for detailed area search from a safe distance. Uses the new Lithium Ion rechargeable battery tube pack as well as disposable cells and the Searchcam belt pack battery system making the SearchTIC power compatible with hundreds of rescue teams around the world.

21709920201 SearchTIC 9,500.00



Delsar Life Detector LD3

Rescue teams around the world have relied upon the LifeDetector for over 15 years to rapidly detect and locate victims of collapsed buildings. The LifeDetector essentially converts the entire collapsed structure into a large sensitive microphone to pinpoint signals from the entombed victims. The seismic and acoustic sensors of the system convert vibrations created by the live victim into audible and visual signals.

- Improved color-coded cable connectors
- Allows two acoustic search probes to be used simultaneously for stereo comparison.
- Audio loop record function records last five minutes of audio for playback and comparison.
- Display panel shows relative signal strength of all six sensors simultaneously. Peak meters indicates highest amplitude reached by each sensor.

21709920306 6 Sensor 12,800.00
21709920304 4 Sensor 10,300.00
21709920302 2 Sensor 7,700.00

21709920311 Delsar Victim Simulator 735.00





UTD Quick Deploy System

UTD Camera w/ Handle

Vision Stick Under the Door (UTD)

The Vision Stick UTD system module is flat paddle camera, which will slide under a door to view what is on the other side. The system plugs into the Vision Stick monitor power supply. A handle is supplied with the system, which allows controlling the system while standing.

The Vision Stick UTD system has a 95° field of view which is off set 30° from the floor which allows viewing the whole room, including beside the door because of its long paddle. The paddle has been left a matte silver cover, since it is less obvious than black against most surfaces and tends to pick up the color of surrounding areas helping it avoid detection of use.

- The UTD Camera with handle is designed to be used as an accessory to the Vision Stick System - Monitor not included.
- The UTD Camera System includes camera, monitor, headphones and Handle.
- The UTD Quick Deploy system is a self-contained video and sound monitoring system. The System includes the UTD Camera, Handle, Headphones, Monitor, and Auxiliary Hole Camera.

2375201	Camera w/ Handle	7,754.00
2375205	Camera System	9,538.00
2375206	Quick Deploy - IR	10,923.00
2375207	Quick Deploy - Color	10,923.00
2375208	Quick Deploy - IR / Color	12,308.00



Triage Belt

A unique belt designed for use within the start triage system. It utilizes four colors of survey tape to categorize patients.


The triage officer simply tears off a piece of colored tape and ties it around the patient's arm, which can be seen and understood from many yards away, unlike standard tags.

The officer then tears a small piece of tape of the same color and placed in the side pouch of the belt. When done with the primary triage, the officer can check the contents of the pouch for an instant count of patients and their severity. Tape not included.



Tape not included

833100	Triage Belt	18.50
833115	Triage Tape (Green)	2.25
833112	Triage Tape (Yellow)	2.25
833114	Triage Tape (Red)	2.25
833111	Triage Tape (Black/White)	2.25

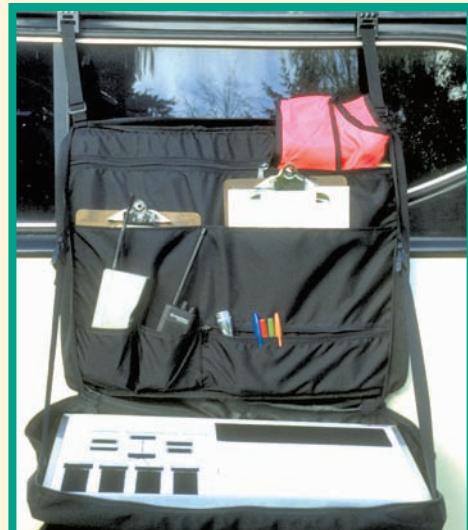

Equipment not included.

Command Board

The Accountability / Command board helps keep track of rescuers and organizes your incident command structure. It features an 18" x 24" dry erase board with the ICS structure screened on it. Includes velcro strip for name tags and twin flashlight harnesses to light the board.

Manufactured from padded Ballistic nylon, pockets accommodate two radios or cell telephones and zippered pockets for clipboards, command vests, and writing utensils. The case will stand by itself or hang from a vehicle window or roof gutters to make a handy command station/table.

809801 Command Board 169.00



Triage / RIT Tarp

Constructed from heavy duty PVC Coated 14 oz. fabric. Can be easily washed down. Brass grommets in corners. Dimensions: 10' x 12'. Available in Green, Red or Yellow

8330105	Green	82.00
8330104	Red	82.00
8330102	Yellow	82.00



GX2003 4 Gas Monitor

3 Operating Modes

Built around high-quality micro-sensor personal 4-in-1 gas monitor with a built in sample pump.

Weight: 11 ounces

- 3 modes: Normal, Bar Hole, and Leak Check
- Monitors LEL, %volume methane, O₂, H₂S, CO
- Leak detect mode offers high sensitivity tests for ppm level natural gas leaks
- 0 to 100% volume Methane
- Auto-ranging display of %volume and %LEL
- Internal sample pump - 40' range
- Vibration, visual, and audible alarms
- Automatic backlight during alarms
- Quick charge Ni-MH Battery (charge in 90 min.)
- High impact protective rubber boot
- Up to 600 hours of datalogging
- Autocalibration or single calibration
- TWA and STEL with lunch-break mode
- Intrinsically safe, CSA, C/US classified
- 2 year warranty

243227103 GX-2003, 115 VAC Charger 1,330.00

243227101 GX-2003, 12 VDC Charger 1,330.00

243720270 GX-2003, Alkaline Battery 1,195.00



GX2001 4 Gas Personal Monitor

The smallest and most affordable 4-gas monitor in the world. Designed to give entrants immediate information on the confined space.

- Simultaneous detection of LEL/O₂/H₂S/CO
- Dimensions: 2.8" x 2.2" x 1.1"
- Weight: 6 oz
- Vibration alarm
- Alarm trend data
- Datalogging standard
- Autocalibration
- Ni-MH batteries recharge in 90 minutes
- Operates for up to 18 hours
- Large LCD display screen
- Automatic backlighting at alarm
- High impact, RFI shielded body
- STEL and TWA readouts
- Peak hold readouts
- Continuously displays current time
- Intrinsically safe, CSA, C / US approved
- 2 year warranty
- Includes Charger

2432233031 115vAC -Alligator Clip, 800.00

2432233011 12vDC - Alligator Clip 800.00



4" Nipple Model with GX2001 (Not Included)

RP-6 Pump

For GX2001 Four Gas Monitor

The RP-6 pump is housed in a rugged plastic case with quick connect fittings located on both ends of the unit. It is sold with either a 4" rubber nipple or with a 10' hose and probe. When buying the RP-6 with the 10' hose and probe, the probe is equipped with a dust filter and the 10' hose connects at the RP-6's quick connect inlet fitting. The inlet fitting of the RP-6 then connects to a removable clear plastic cup, which is a filter holder. This filter holder contains a dust and hydrophobic filter inside. The exhaust fitting of the RP-6, which is also a quick connect, connects to a coiled hose, which brings the sample to the GX-2001. The RP-6 will run for 5 hours from just 1 AA alkaline battery.

2432811166 10' Hose and Probe 380.00



GX2003 Kit

Calibration Kit

Complete calibration kits for our 4 gas instruments. Each kit contains 34 liter aluminum cylinder with H₂S (25ppm) / CO / CH₄ / O₂, Regulator, Case, and appropriate interface device for the instrument.



Kit shown with GX2001 (not included)



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.

2432810301 GX2003 350.00
2432810101 GX2001 350.00



Shown with HT-1250 Radio. Not included

Deluxe Radio Chest Harness

One-Size-Fits-All radio harness will adjust to hold any radio snugly to your chest. The vertical orientation of the radio improves reception, extends antenna life, and reduces the chance of chest injury during a fall. The unique suspension system of 1.5" webbing shoulder straps and elastic chest strap, virtually guarantees that the harness will not bounce or swing, even while crawling through confined spaces. Twin buckles ease the donning of the elastic chest strap. The harness features a large bellows cargo pocket, pen pouch, and twin elastic antenna keepers. ID Version includes a removable ID pocket with ID window. Weight: 9.1 oz. Color: Black.



ID Version

820301 Deluxe 40.00
820302 Deluxe w/ ID Pouch **NEW!** 49.95



Shown with HT-1250 Radio. Not included

Mesh Radio Chest Harness

Lightweight, Breathable

A lightweight version of our Deluxe Radio Chest Harness. Adjustable webbing shoulder straps with quick-adjust elastic chest strap. Mesh provides excellent ventilation for hot climates. Elastic loops hold pens, flashlights, etc. Color: Black.

820305 Radio Chest Harness 31.00



Shown with HT-1250 Radio and Garmin V GPS. Not included

RescueTECH USAR Radio Chest Harness With Integral GPS Holder

The use of Radios and GPS units during natural disasters is a given. We found during the rescue operations following Hurricane Katrina, that existing radio chest harnesses did not meet the needs of rescue teams. We have updated our popular Deluxe Radio Chest Harness to include a see-through compartment for a Garmin V" GPS, additional storage space, redesigned straps system, and many other features.

820325 USAR Radio Chest Harness 49.00



Incident Command I.D. Badge Holder

Designed to hold I.D. Badges during Disaster Response. Safely stores permanent and temporary identification cards. Security pouches holds extra paperwork, currency, etc. Adjustable webbing neck strap. Water-resistant magna tuf fabric. Heavy duty polished clear vinyl allows I.D. Tags to be easily read by scene safety and security personnel. Pen / Penlight holder keeps items ready for instant access.

820201 ICS Badge Holder 14.00



Shown with HT-1250 Radio. Not included

Double Radio Chest Harness

Same suspension and adjustment as the Deluxe Radio Chest Harness. Carries two radios, one on each side of platform with a center pocket for extra batteries, etc. Second radio pocket can also carry GPS unit or cell phone. Weight: 9.6 oz. Color: Black.

820321 Double Radio Harness 48.00



820205 ID Badge Attachment 8.00



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



Kershaw Blur Serrated

The Blur's handle is built from anodized 6061-T6 aluminum with "Trac-Tec" inserts for an extremely secure grip even in the most damp or slippery conditions. The blade is made out of 440A stainless steel and measures 3.5". Easy opening with Speed Safe technology. Folded, the Blur measures 4.5" and weighs in at a comfortable 4.2 oz.

2282376794	Rescue Tip Serrated	99.50
2282376796	Serrated (Black)	99.50
2282376797	Serrated (Red)	99.50



E-Z OUT RESCUE

The E-Z Out Rescue features a blunt tip design on the fully serrated sheep foot stainless blade that makes this knife safer to use in situations where you don't want to risk puncture. Features a yellow handle with black Kraton® non-slip rubber inserts, removable pocket clip and lock back. Closed: 4.62". Blade: 3.5". Weight: 2.6

2282376647 50.50



Spyderco Assist Rescue Knife With Glass Breaker

Made for the fire/rescue professionals, the Assist features a carbide glass breaker, sure grip FRN handle, 80% serrated blade, VG-10 high-carbon blade steel, survival whistle built into the handle and wire clip. Blade and handle shape are designed to allow controlled rope cutting without an exposed cutting edge. Place the rope between the partially closed blade and the handle then squeeze the blade shut. Length: blade 3.69", closed 4.875". Wt: 4 oz.

2282376549 107.95



LEAK PARTIALLY SERRATED

The Leek has a bead-blasted 410 stainless-steel handle, with a 440A stainless-steel blade. Opens with Speed Safe technology. Blade: 3", closed: 4". Weight: 3.1 oz.

2282376802 65.95



Kershaw Scallion

Aluminum and Polyamide Handle

Scallions are designed with Speed-Safe technology, which allows you to open the knife safely and quickly with one finger. A locking liner secures the blade in position once it is deployed. Thumb lock keeps knife securely closed. Scallions are made with durable anodized aluminum handles and stainless-steel blades. Heavy-duty, removable carrying clip. The Black Scallion is made with durable injection molded Polyamide handles and stainless-steel blades. Heavy-duty, removable carrying clip. Blade Length: 2.4" Handle: 3.5" Weight: 2.3 oz.

20842766 Aluminum Handle (Blue) 58.00
20842767 Polyamide Handle (Black) 48.00

Rescue Hook

Form and function same time and effort for the rescuer. Manufactured of 440C stainless steel with a molded Kydex sheath. The Rescue Hook's blade has a length of 0.85" and a thickness of 0.115". Overall Length: 2.90".


2282327040 37.50



Wingman

The Wingman Knife's flip-out blade fulfills your need for speed. Its safety features help you break out of the danger zone. Easily deployable one hand flip-open blade for when you feel the need for speed. Knife has a blunt tip and both smooth and serrated blade sections. The blade locks open for safety and the handle has a blunt glass-breaking tip. Removable spring steel clip is always ready for action when secured to a belt or lash tab.

20842771 29.00

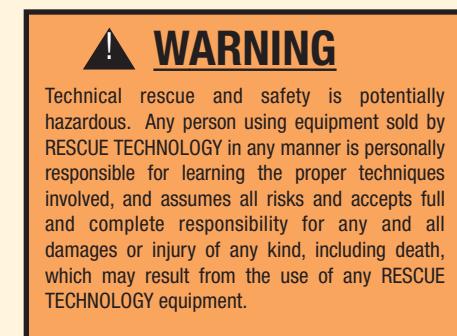

Spyderco Assist Rescue Knife With Glass Breaker

Made for the fire/rescue professionals, the Assist features a carbide glass breaker, sure grip FRN handle, 80% serrated blade, VG-10 high-carbon blade steel, survival whistle built into the handle and wire clip. Blade and handle shape are designed to allow controlled rope cutting without an exposed cutting edge. Place the rope between the partially closed blade and the handle then squeeze the blade shut. Length: blade 3.69", closed 4.875". Wt: 4 oz.

2282376549 107.95



Spyderco Rescue Knife

VG-10 blade steel and fully serrated with a sheepfoot tip. Large thumb hole with texturing behind it and the FRN volcano grip textured handle. Blade thickness: 1/8"

	Open	Color	
2282376553	79mm 7 1/8"	Orange	75.00
2282376530	93mm 8 1/8"	Black	85.00



Spyderco Ladybug

The smallest knife with full Spyderco power for your pocket (without clip). High-carbon stainless blade. Zytel handle. Open length: 4.4". Closed length: 2.5". Weight: 0.6 oz

2282376522 Ladybug, Black 36.00





RescueTECH Technician's Gloves

Mesh Back / Goatskin Palm

With comfort and utility in mind, we designed these rescue gloves especially for the rope rescue technician. By using a combination of goatskin, mesh fabric, and amara leather, we offer the optimum combination of materials that make your job safer and easier. Fingertips designed for handling locking gates on carabiners and tying knots.

491329	Small	32.00
491339	Medium	32.00
491349	Large	32.00
491359	XLarge	32.00



Heavy Rescue

Cowhide shell/Cowhide Wear Pad

Glove design incorporates double palm with wear pad extending up the individual fingers and thumb and around to the back of the hand, leaving a single layer at the finger tips for superior tactile capabilities. This protective design utilizes no loose flaps or webs between the fingers that can trap dirt or roll up during use. Flexible design permits ease in rope handling. Leather loop allows for attachment to carabiners. Color: Black. Weight: 6.1 oz.

490521	Small	28.00
490531	Medium	28.00
490541	Large	28.00
490551	XLarge	28.00
490561	XXLarge	28.00



Pro Rescue Glove

Mesh Back / Leather Palm

The Pro leather gloves are perfect for those jobs that are especially hard on the hands. When anything less than a leather glove won't do. Top quality leather construction throughout. Leather knuckle panel provides increased protection. Easy entry, wide opening elastic cuff (Easy-Fit design). Anatomically-cut, leather palm and heel reinforced panels for extended durability. Smooth surface thumb improves handling of objects. Reinforced thumb and fingertips increase protection and reduce wear.

491221	Small	39.95
491231	Medium	39.95
491241	Large	39.95
491251	XLarge	39.95
491261	XXLarge	39.95



Ringers Rope Rescue Gloves

Omni-directional stretch fabric offers flexibility and excellent airflow. Palm manufactured of Armortan® leather that can be machine washed to remove contaminant. Double thickness in palm with DuPont Kevlar® thread for long wear. Reinforced finger tip and thumb extends glove life. Precurved ergonomic shape and anti vibration gel padding for extra comfort. Specify Size.

4907X4	Red (SM - XXL)	40.00
4907X1	Black (SM - XXL)	40.00



Rigging Glove

Mesh Shell / Amara™ Palm

Breathable Mesh for Increased ventilation. Smooth surface thumb and index finger improve handling of objects. Reinforced thumb and fingertips increase protection and reduce wear. Neoprene knuckle panel provides increased flexibility and protection. Anatomically cut, foam-padded palm lessens impacts and reduces vibration. Soft, flexible, durable and breathable synthetic leather palm. Easy entry, wide opening elastic cuff. Pull cord on wrist for easy entry and for hanging gloves after use.

490221	Small	19.95
490231	Medium	19.95
490241	Large	19.95
490251	XLarge	19.95
490261	XXLarge	19.95



Leather 3/4 Finger Glove

Genuine leather, extra gel-foam padding in palm. Great for rigging and stagehands. 2-way stretch spandex top. Flexible, soft, durable and breathable leather palm.

4906121	Small	25.00
4906131	Medium	25.00
4906141	Large	25.00
4906151	XLarge	25.00
4906161	XXLarge	25.00

RESCUETECH GLOVE SIZING

Measure around widest portion of hand

XSmall	5 - 7"	Large	9 - 10"
Small	7 - 8"	XLarge	10 - 11"
Medium	8 - 9"	XXLarge	11 - 13"





USAR Knee and Elbow Pads

Great for use in building collapse searches. Velcro closure and tough cap. Provides heavy duty protection for the toughest jobs.

Weight

481611	Knee Pad, pair	13.7 oz.	29.50
481621	Elbow Pad, pair	5.60 oz.	17.00

Seat Belt Cutter


A lightweight seat belt cutter. Will easily cut through webbing and cords with ease. Manufactured from high impact plastic with hardened stainless steel blade. Dimension: 4.75" x 1.75". Weight: 1 oz.



630101	Seat Belt Cutter	4.50
--------	------------------	------

EMT Shears

Safer than a knife when used around ropes. Safety bandage tip. Stainless Steel Blades. May be placed in Autoclave. Cuts clothing, ropes, or harnesses. Stainless Steel blades with polypropylene handles. Length: 7". Weight: 2 oz.

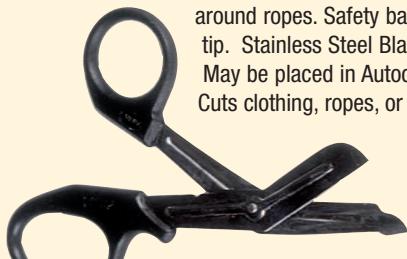

630105	EMT Shears	6.00
--------	------------	------

EMT Shears Pouch

A new design from Rescue Technology. Made from Durable Magnatuf coated nylon fabric. Features glove pouch, shears pouch with hook and loop keeper and a pouch for penlights, pens, etc. Fits onto belts with a quick removable snap system. A plus for safety. **Shears not included.**

833010	EMT Shears Pouch	17.00
--------	------------------	-------



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



Elastic Glove Cinch

Manufactured from durable stretch cord and high quality cordlock. Elastic holds gloves in place. Girth-hitch this Cinch around gear loops, waist belts, and D-rings to keep gloves ready to use.

491902	Elastic Glove Cinch	5.00
--------	---------------------	------



Latex Glove Pouch

Made from our high quality nylon fabric and top grade hook and loop fastener. Holds multiple pairs of gloves.

833001		5.50
--------	--	------






R3-Kiwi™ USAR Helmet

Certified NFPA 1951

Lightweight Kevlar brand fiber / composite shell. Temperature resistance up to 600° F without distorting or melting. Polyurethane impact liner with leather sweatband provides impact and thermal protection. Reflective Trim. High-gloss paint finish. Ratchet headband with easy-to-dial adjuster. 3 point nomex chin strap. Certified NFPA 1951, EN443. ANSI X89.1 Type 2 compliant. Custom lettering with clear coat finish available.

481434	Red	270.00
481436	Blue	270.00
481432	Yellow	270.00
481439	White	270.00

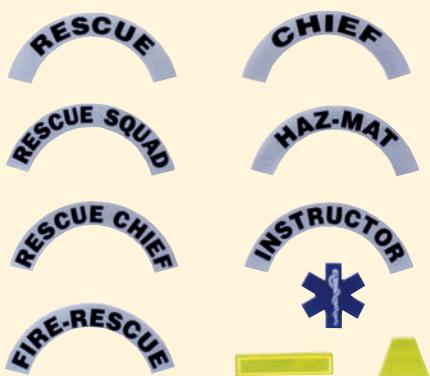

Reflective Helmet Labels

Reflective Labels that are a great addition to helmets. Reflectivity adds to safety and identification.

482101	"Rescue" Crescent	2.15
482104	"Fire Rescue" Crescent	2.15
482103	"Instructor" Crescent	2.15
482106	"Rescue Chief" Crescent	2.15
482107	"Rescue Squad" Crescent	2.15
482108	"Haz-Mat" Crescent	2.15
482109	"Chief" Crescent	2.15
482212	Stripe, 1" x 4", pair (YE)	2.15
482222	Trapezoid, Set of 5 (YE)	3.00
482111	Star of Life Decal	2.15



USRX™ Urban Search and Rescue Helmet

Innovation, quality, and service in an all new lightweight, compact design. USRX rescue helmets are engineered Bullard Tough™ for extreme search and rescue conditions. Featuring a streamlined design, USRX rescue helmets incorporate recommendations from USAR teams and other rescue professionals. Features and Benefits Compliance • NFPA 1951-2001 • NFPA 1971-2000 Tough and Durable Protection. Bullard Tough. Quick, Easy ratchet headband offers both a quick-turn of the knob and a new, unique 3-position height adjuster for balance and comfort. The USRX is standard equipped with leather covered ratchet and a 3 point chin strap. The USRX comes standard with ESS goggles. Cost-Effective Maintenance USRX helmets are designed from the start to make maintenance simple and cost effective. Fewer components, and the greatest cost effectiveness in the industry, enhance your long-term investment.

480522	Yellow	175.00
480524	Red	175.00
480526	Blue	175.00
480529	White	175.00



Advent A-2 Helmet

Conventional styling. Offers top, front, side and rear protection similar to a standard firefighter's helmet. The A-2 offers a permanently attached multi-point chin strap designed especially for search and rescue operations. Eight point suspension for increased comfort and safety. The ratchet suspension quickly adjusts to size. Available Adhesive clips make attachment of almost any lamp with a head band a breeze.

480530	Orange	111.00	480565	Repl. Suspension	31.00
480534	Red	111.00	480555	Adhesive Clips, Set of 3	3.70
480539	White	111.00			
480532	Yellow	111.00			
480536	Blue	111.00			

Meets ANSI Z89.1 and OSHA 1910 requirements

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.





R3-Kiwi Rescue Helmet

The ultimate in comfort and protection. DuPont Kevlar® shell and full polyurethane impact headliner. Proven in the field by USAR/FEMA and Task Force One personnel. Adjustable Ratchet Headband with multi-point chin strap. Light pod version works best with UK4AA . ANSI Z89.1 Type 2 compliant.

4815314	R3 Kiwi (Red)	215.00	4815324	R3 Kiwi, Light Pod (Red)	230.00
4815316	R3 Kiwi (Blue)	215.00	4815326	R3 Kiwi, Light Pod (Blue)	230.00
4815312	R3 Kiwi (Yellow)	215.00	4815322	R3 Kiwi, Light Pod (Yellow)	230.00
4815319	R3 Kiwi (White)	215.00	4815329	R3 Kiwi, Light Pod (White)	230.00

WR2000 Multi-Use

For High Angle and Water Rescue

Shell made with Dupont Kevlar® with 9 ventilation holes. 6 point suspensions with dial ratchet. 3 Point nylon chin strap with quick-release buckle. Ratchet adjustment expands to 25". ANSI Z89.1 compliant.

481544	WR2000 Helmet, Red	109.00
481546	WR2000 Helmet, Blue	109.00
481549	WR2000 Helmet, White	109.00



R5 Kiwi Rescue Helmet

Manufactured of DuPont Kevlar® shell. Very Lightweight with a small profile for work in confined spaces. Multi-Point chin strap. Adjustable ratchet headband. One Size Fits All. Light Pod version works best with UK4AA. Complies to AS 1801 and ANSI Z89.1 Type 1.

4815524	R5 Helmet, Light Pod (Red)	117.00	4815514	R5 Rescue Helmet (Red)	103.00
4815526	R5 Helmet, Light Pod (Blue)	117.00	4815516	R5 Rescue Helmet (Blue)	103.00
4815529	R5 Helmet, Light Pod (White)	117.00	4815519	R5 Rescue Helmet (White)	103.00

R4 Helmet

Similar in construction to the R3, the R4 has a high gloss woven all-Kevlar® RTM shell. Polyurethane full head impact liner. Front Leather headband with a dial ratchet adjustment system. ESS Goggle Mounts. 3 point chin strap. Compliant to ANSI Z89.1, Type I, Class G. Weight: 1.7 lbs.

481564	R4 Helmet (Red)	150.00
481566	R4 Helmet (Blue)	150.00
481569	R4 Helmet (White)	150.00
481562	R4 Helmet (Yellow)	150.00

⚠ WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.





Shown on R3 Helmet with Light Pod (not included)

Xtricator™ Goggles

For R3, R4, and R5 Rescue Helmets

The ideal solution for primary eye protection for extrication and forcible entry work. Snaps onto the goggle attachment points of the R3, R4, and R5 Rescue Helmets. The ESS X-tricator™ can be stored in a pocket and deployed using the Snap-On/Snap-Off™ helmet mount system, providing the performance of an ESS goggle in seconds. Includes a set of two Tear-Off Lens Covers.

481539G Xtricator Goggles 42.00



Vertex® Best

Helmet for work at height and industry.

The adjustment wheel has two height positions and the chin strap can be adjusted for a perfect fit. Side slots and the above-the-ears cut of the shell allow attachment of standard hearing and eye protection. Four clips, on the outside the helmet, correctly hold a headlamp. Polycarbonate shell, resistant to impact and wear. Weight: 492 gms. Meets CE and ANSI Z89.1 - 2003 -Type I class E.

235410202	Yellow	105.00
235410204	Red	105.00
235410209	White	105.00
235410201	Black	105.00



Vertex® Vent

Comfortable and durable helmet with ventilation, meets requirements for working at height.

Adjustable ventilation: 5 holes on each side, can be closed with 2 sliding shutters. Chin strap designed to decrease the risk of losing the helmet in case of impact during a fall. Polycarbonate shell, resistant to impact and wear (meets EN 397 industrial helmet standard and EN 12492 standard). Meets optional requirements of the EN 397 standard: lateral deformation and use at low temperatures (down to - 30 °C). Weight: 465 gm Meets CE and ANSI Z89.1 - 2003 -Type I class C.

235410252	Yellow	105.00
235410254	Red	105.00
235410259	White	105.00
235410251	Black	105.00



Shown on Cascade Water Rescue Helmet (not included)

ESS StrikeTeam Goggles

Designed for Technical Rescue and Wildland Fire Fighting equipped with a thick polycarbonate lens that has been hardcoated and anti-fog treated both inside and out. Soft open cell facefoam designed to fit over most eye glasses. Comes with flame resistant Velcro™ tabbed elastic strap which features instant fit speed clip. Exceeds ANSI Z-87.1 and CSA Z94.3-92

481601	StrikeTeam XTO	36.00
481609C	Replacement Lens, Clear	15.50
481609S	Replacement Lens, Smoke	15.50
481608	Tear Off Lens Covers	6.35
480555	Goggle / Headlamp Clip	3.70



Vertex® Best DUO LED 14

Helmet integrated DUO LED 14 headlamp

Tilt-able hybrid light source : halogen and 14 LEDs.

Halogen light source for long distance lighting (100 m).

Regulated 14 LED lighting : maintains constant level of lighting for up to 63 hours. Meets CE and ANSI Z89.1 - 2003 -Type I class C. Color: White Only.

235410239 Vertex w/ Duo LED 14 238.00



Shown w/ R5 Rescue Helmet (not included)

Mini Q-4 Helmet Light

Fits Kiwi Light Pods

Extremely bright! Over twice as bright as premium lights of similar size. Provides 4 AA Batteries of power in a light approximating the size of lights containing only 2 AA batteries. Comfortably fits in pocket, briefcase, tool box, and other small places. Optional Helmet mounting brackets attach to industrial, fire, and climbing-style helmets. Burn Time 4-5 hours. Dimensions: 5.5" x 1 1.5" x 1". Batteries included. FM Approved. Weight: 6.3 oz.

485342	Mini Q-4 Fire (YE)	27.00
485349	Spare Bulb for Mini Q-4	10.00





CE

Tikka Plus

Adjustable proximity lighting with long burn time. Three lighting levels (maximum, optimum, economy) and a blinking mode. Ergonomically designed, comfortable elastic headband. Tilting lamp body. Long light duration up to 150 hours. Water-resistant for all-weather use. Uses 3 AAA/LR03 batteries (supplied). Weight: 78 gm including batteries.

235405472 Tikka Plus

34.95



CE

MYO XP

The Petzl Myo XP is the newest light from Petzl. It features a single high-powered LED with 3 lighting levels. Provides a powerful, even and adjustable white light, with long duration. It is a single light for multiple uses. Powerful, focused light beam with 3 lighting levels (maximum, optimum, and economy) and a blinking mode, to adapt the light to the activity and as a function of light duration needs. "Boost" mode provides 50% more light than the maximum level for 20 seconds. Wide angle, flip-down, lens is included for flood beam like proximity lighting. Battery life indicator to warn when the batteries are 70% and 90% drained. Tilt-able light body. Switches are protected to help avoid accidental operation. Water resistance for all-weather use. Lighting distance of up to 45 meters (65 meters in boost mode). Light duration of up to 170 hours. 3 AA batteries (included) Weight: 175 grams with batteries.

23542083 Myo XP

79.95



UL
CE

Tikka XP / XP HazLoc

The Petzl Tikka XP is the newest light in the Petzl Tikka series of headlamps. Using one high powered LED this light is brighter than the 4 LED's found in the Petzl Tikka Plus light. Using a new high power focused LED light output will have three settings plus a 'boost' button producing a 50m beam when required. Other features include a tilting head, sliding diffuser for flood lighting and an LED battery level indicator. Includes a boost setting: (50m range) 20 second before reverting to previous setting. Light Duration: High: 60h; Medium: 80h; Low: 120h. 3 x AAA(included). HazLoc Model Rating: UL Class I, Div2, Group C.D. Weight with batteries: 95 grams.

23542086 Tikka XP

49.95

23542081 Tikka XP HazLoc (shown)

59.95



Helmet not included.

e+LITE

Emergency headlamp

Long-term dependability, even when kept for years in harsh conditions - can be stored with batteries for up to 10 years and still be operational.

Waterproof down to -1 m. Protective case included. Shines up to 19 m and provides up to 4 consecutive nights of lighting (45 hours).

Can be worn on the head, around the wrist or neck or attached to thin-edged objects with integrated clip. Red light beam helps preserve night vision. Clip attachment system and removable elastic headband. Certified ATEX (3 GD EEx ni IIC T6) and HazLoc

Technical specifications

- 3 white LED and 1 red LED.
- Waterproof down to -1 m.
- Weight : 27 g with batteries.
- 10-year guarantee.

23542121 e+LITE

29.95



CE

Heads Up Lite

Watertight to 500 Feet

Adjustable beam with large on/off switch. Corrosion proof ABS polymer. 4 AA-cell Alkaline Batteries included. Heat resistant hypo-allergenic silicone rubber strap. Head rotates up and down - special ratchet system holds light in place. Ideal for hard hats and helmets. Includes one high and one low intensity krypton lamps. Color: Black. Weight: 5.4 oz.

4872600RS Heads Up Lite

41.00

UL approved intrinsically safe, CL I, Div. 2, Group ABCD, T3C



UL

Heads Up Dual

Xenon / LED Combination

The Dual combines Pelican's bright Xenon headlamp with a long-lasting set of three (3) LED lamps. Switch controls Halogen and LED lamps. Tilt head offers 90° adjustment. Runs on 3 AA-cell batteries (included). Runs 3 hours on the halogen lamp and 50 hours on the LEDs. Complete with rubber strap. Color: Black. Weight: 4.9 oz.

4872620RS Heads Up Dual

36.00

UL approved intrinsically safe, CL I, Div. 1, Group CD, T3C





EOS II LED

The EOS is optimized for both close-up and distance needs. The combination of a Luxeon/1 watt L.E.D. and a special lens maximizes the beam by balancing long throw with flood light. The EOS provides a self-contained 3AAA battery system that eliminates external wires, and is equipped with (3) brightness levels. Each level provides true current regulation ensuring that the EOS will remain at constant brightness as long as the batteries have sufficient voltage. Durable and water resistant to water. Weight: 3.7 oz with Batteries (Included). Waterproof to 1 Meter.

Burn Time: High: 6.5 Hours; Medium: 12.5 Hours; Low: 60 Hours.

21851051 EOS II LED 52.00
2185105 EOS LED 43.00

UL approved intrinsically safe, CL I, Div. 2, Group ABCD



Apex LED

The Apex LED Headlamp will light up your Rescue world. The 3-watt MaxBright LED will shine a spotlight beam up to 180 feet away and the four Ultra-bright LEDs will cast a steady wide beam or flashing light out as far as 75 feet. All this power in a 10-oz. package that squeezes 72 to 200 (average 150) hours of light out of four AA alkaline batteries (included). Waterproof to 1 Meter. The dual switch design allows easy access to the five modes. Submersible to 3-feet, works with alkaline, lithium or rechargeable batteries.

Burn Time: 3-watt MaxBright LED

High Mode - 72 hrs
 Low Mode - 96 hrs

Burn Time: Four Ultra-bright LED's

High Mode - 100 hrs
 Low Mode - 150 hrs
 Flashing Mode - 200 hrs

2185101 Apex LED 85.00

UL approved intrinsically safe, CL I, Div. 2, Group ABCD, T3C



Yukon HL Headlamp

Hybrid L.E.D. Technology employs state of the art, 1-watt L.E.D. and 3 high output, 5mm L.E.D.s. The 1-watt L.E.D. rivals the output of incandescent bulbs. For long burn time switch to the 3 L.E.D. array. 10,000 hour bulb life and burn times of 44 hours from the 1-watt L.E.D. and 120 hours from the 3 L.E.D. array.

488145HL Yukon HL Headlamp 66.00

UL approved intrinsically safe, CL I, Div. 1, Group ABCD, T3C



WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.



Quad Headlamp

Four Ultra-bright LEDs power through the darkest conditions. Tough waterproof housing that will survive severe impacts and water submersion up to one meter. Four LED bulbs operate in high, medium, low and flashing modes. Battery power meter with 24 hour burn time on high setting and 47 hour burn time on low setting. Water proof to one meter.

2185201 33.00

UL approved intrinsically safe, CL I, Div. 2 Group ABCD
UL approved intrinsically safe, CL 2 Div. 2, Group FG



Aqua King NEMO

Watertight to 500 feet. 12 volt, 14 watt, 100,000 candlepower, primary hand-held light source. ABS housing with high impact polycarbonate lens. Includes dual filament Xenon safety lamp with 60 hours of lamp life (30 hours each), protective lens shroud, and a shock absorbing internal battery module that protects 8 D-cells from hard abuse. Combination pistol / lantern grip quickly converts to multiple positions. Operates 10 - 12 hours on 8 D-cell alkaline batteries (not included). Dimensions: 9" x 4.5". Color: Black. Weight: 2.7 lbs.

4874000 Aqua King NEMO 105.00
4874003 Xenon Lamp Module 15.50
4874006 Wall Mount Bracket 16.50

FM, CSA approved non-incendive.



Princeton Tec Pilot

A great extra light source, the Pilot weighs only 15 grams. Attaches to headlamp straps, harnesses, belts, backpack and hydration pack straps. The Pilot is always accessible for use as a hand held light or marking light with the included blinking/signaling mode. It features:

- High Powered white L.E.D.
- Burn Time: 12-14 Hours
- Water-resistant
- Made in USA
- Lifetime warranty

21851081 Black w/ White LED 10.00
21851084 Red w/ Red LED 10.00
21851085 Green w/ Green LED 10.00





Super SabreLite



Industrial Quality Work Light

Used by Army and Navy strike teams. High-tech Xenon Laser Spot provides four times the useable candle power of ordinary C & D size flashlights. Unbreakable ABS body with a high impact polycarbonate lens. Includes belt spring clip, stainless steel split ring and black lanyard. Meets Military specifications. Requires 3 C-cell batteries. Dimensions: 7.75" x 1.875. Weight: 6.5 oz.

48720001	Black	35.00
48720000	Orange	35.00
48720002	Yellow	35.00
4872004	Xenon Lamp Module	12.35

UL Class 1, Div. 1 Approved. FM, MSHA, CSA, AUS, and USAR approved non-incendive.



Helmet Lite Holder

Multi-directional adjustable light holder. Three piece set designed to fit all hard hats and fire helmets without drilling or gluing. Attaches to either left or right side and does not interfere with visors. Fits VersaBrite, VersaBrite II, Mitylite and Stealthlite and Mini Q-4.

4870700	Polycarbonate	15.50
4870760	Stainless Steel	15.50



StealthLite

Watertight to 500 feet. Unbreakable ABS body with high impact polycarbonate lens. State of the art Laser Spot Xenon lamp module. Includes one-handed safety switch operation, double shock mounted battery compartment, and black lanyard. Operates 5 - 6 hours on 4 AA-cell alkaline batteries (not included.) Weight: 5.3 oz.

48724001	StealthLite (Black)	34.00
48724002	StealthLite (Yellow)	34.00
4872404	Xenon Lamp Module	12.35

FM, CSA, USAR approved. Class I, Div. I, Group D.



FoxFury Performance Fire Headlamp For Helmets with Visor

Powerful 24 LED Headlamp with Ultra-bright LED's and an Adjustable Beam Angle. Meets NFPA Fire Resistant Requirements of 500°F (260°C) for 30 minutes. Intrinsic Version is ideal for Fire Resistant light for Hazardous Environments including Structural Firefighting, Chemical Plants and HazMat. The only headlamp in the world that is UL 913 Certified Intrinsic Safe for Hydrogen and Acetylene Environments.

- Provides Distance and Peripheral Vision
- Helps cut through smoke and fog
- Fits Most Helmets with Visors or Shields
- 4 Ultra-bright LEDs for Focused Vision

23874006	Standard	86.00
23874016	Intrinsic	124.00

Intrinsic version meets:
Class 1, Division 1 Groups A-D, T6
Class 1, Division 2 Groups A-D, T6



Little Ed™ Rechargeable Recoil LED™



The Recoil uses a 1 watt LED that's aimed backwards into the reflector. 100% of the light is captured and aimed forward as a tight collimated beam that's as bright as an incandescent. The body is made of tough ABS resin that's corrosion proof and resistant to extreme temperatures. It uses a long-life NiMH battery pack for extended burn time and comes with a charger base unit that can be installed at home or work using the 110V transformer. Packaged Weight: 1.7 lbs.

48736602		122.00
----------	--	--------



FoxFury Signature Fire Headlamp Fits Helmets without a Face Shield

Meets NFPA Fire Resistant Requirements--500°F (260°C) for 30 minutes. Fire Resistant Headlamp with Peripheral Lighting Designed for Structural Fire Fighting as well as Wildland Fire Fighting. Intrinsic Version is ideal as a Fire Resistant light for Hazardous Environments including Structural Firefighting, Chemical Plants and HazMat.

- Autodim Sensors
- 4 AA (Batteries Not Included)
- Battery Life:
Full Power = 8 hours
Reserve = 16 hours
- Distance Vision = 100 - 150 ft
- Peripheral Vision = 60 ft
- Weight = 11.9 oz
- Size = 7.4" x 1.3" x 3.0"
- Waterproof to 20 ft.

23872006	Standard	103.50
23872016	Intrinsic	135.00

Intrinsic version meets:
Class 1, Division 1 Groups A-D, T6
Class 1, Division 2 Groups A-D, T6





Clip for windows and cones

E-Flare™ 500

E-Flare 500 Series: Professional HZ Model

- Rubber Base Included
- Flouro Yellow Body Color
- Bright Clear Colors.
- Low Battery Indicator
- Designed for use in Class I, Div 2/Zone 2 Hazardous areas
- 80 hour battery life

23625004	E-Flare, Red	43.00
23625002	E-Flare, Amber	43.00
23625006	E-Flare, Blue	50.00
2362500C	Mounting Clip	3.90
2362500M	Mounting Bracket, Magnetic	13.25



Lite Tracker™

Great for RIT Kits

LITE TRACKER™ is a bright flashing visual indicator which ensures that the wearer can be seen at night or in low visibility conditions. This small, lightweight device is made of tough polycarbonate plastic, making it virtually indestructible.

- Super Bright L.E.D. Provides Strobe
- Tough Polycarbonate Case
- No Bulbs To Break
- Over 50 Hours at full intensity brightness

2252304	Light Tracker (Red)	32.95
2252302	Light Tracker (Lime)	32.95



Shown: LZ Kit, Red/Blue

E-Flare™ 5 Strobe LZ Kit


E-Flare 500 Series: Professional Model

- Rubber Base Included
- Flouro Yellow Body Color
- Bright Clear Colors
- Low Battery Indicator
- Designed for use in Class I, Div 2/Zone 2 Hazardous areas
- 80 hour battery life
- 5 Strobe LZ Kit includes 1 Blue and 4 Amber or Red Strobes.

23625100	E-Flare LZ Kit, Amber/Blue	232.00
23625104	E-Flare LZ Kit, Red/Blue	232.00

Swiftwater Rescue

An in-depth look at swiftwater rescue for the professional. Topics include basic rescuer safety considerations, river hydrology, equipment, shore-based, boat-based, and in-water rescue techniques, medical considerations, rigging for river rescue, incident command, and swiftwater training. Illustrated with line drawings and photographs. Paperback. 360 pages.



899122 Swiftwater Rescue 24.95

Swiftwater Field Guide

Companion to Swiftwater Rescue


Handy 4" x 6" pocket reference to topics like basic rescuer safety, river hydrology, equipment, shore-base, boat-based, and in-water rescue techniques, knots, rigging for river rescue, helicopters, incident command, and special situations. 52 pages.



899124 Swiftwater Field Guide 16.95

Whitewater Rescue Manual

This book presents the best techniques for self-rescue and rescue of companions on the river. Subjects include equipment safety, rope handling skills, swimming rescues, and first aid. Exciting case histories are interlaced as sidebars to the running text. 256 pages. 120 illustrations.



899121 Whitewater River Rescue 17.95



RescueTECH ACCESS Lifeline™ T-Shirt

After receiving many requests, we finally added a T-shirt to our promotional line of products. Made from 100% cotton, the shirt is both comfortable and durable. Color: Heather Gray.

400229	Small	12.50
400239	Medium	12.50
400239	Large	12.50
400239	XLarge	12.50
400239	XXLarge	12.50

Z-Drag Crib Sheet

Durable plastic "crib sheet" is a handy reference when you need to rig a quick 3:1 mechanical advantage system. They show how to set up a Z-Drag, Vector Pull, C+Z, Double Z. Also includes important knots. Dimensions:




899116 Z-Drag Crib Sheet 4.95

Public Safety Diving

By Hendrick and Zaferes

Written for instructors, dive team captains, surface teams, and underwater personnel. Offers information on procedures for safe operations and proper methods of training. Safety is the consistent theme throughout, with an emphasis on surface support, accident prevention, contingency procedures, and standard operating guidelines. Includes methods of search in Black Water, Swiftwater, and Contaminated Water.



899130 Public Safety Diving 39.00


Surface Ice Rescue

By Hendrick and Zaferes

This book provides practical, up-to-date information on training, team management, equipment, and techniques for ice rescue teams.

- Preplanning
- Three levels of training
- Managing an operation
- Ice rescue equipment
- Duties and responses
- Communication
- Special situations
- The four processes of heat loss


200 pages. Dimensions: 7"x 10"



899134 Surface Ice Rescue 35.00

Staying Alive: Swiftwater Rescue Techniques - DVD

This video can be used as a training aid or as a



great addition to your reference library. It contains the latest in rescue techniques, with many live footage scenes & actual rescues. Perfect for the first responder all the way up to Technical Rescue Professionals. Includes: rescue basics, gear, hydrology, river features, rescue scene management & incident size up, self rescue, and more. Also knots, anchors, lowhead damn rescue, foot entrapment & PFDs

899521


49.95

Technical Rescue Operations

Volume I

Planning, Training & Command

The new rules of rescue have improved the way firefighters and other first responders are able to detect, locate, treat, and extract trapped victims in practically any situation by emphasizing factors like innovative training, better equipment, and more intelligent planning by well-informed decision-makers. Technical Rescue Operations, Volume I: Planning, Training, and Command lays the framework for responding to technical rescues and disasters of all types in the safest and most effective manner.




899132 Technical Rescue Ops I 69.00

Engineering Practical Rope Rescue Systems

by Mike Brown

The NEW Standard by which all technical rope texts will be judged. Thoroughly researched, comprehensive, and easily understood. Covers everything from forming and training a rescue team to traverse engineering.




899104 Engineering Rope Rescue Sys. 71.95
899104G Instructor's Guide 47.50

Swept Away

Video Guide to Water Rescue Op's

A comprehensive rescue training film that has been specifically developed for emergency personnel who are called upon to respond to water emergencies. Swept Away provides an in-depth look at the essentials of water rescue and can serve as an invaluable training resource for both new and experienced emergency personnel. Running Time: 30 Minutes.



899520 Swept Away 49.00

Technical Rescue Operations

Volume II

Common Emergencies

The second in a 3-volume series covers responding to, managing, and conducting rescues in the "daily" setting of fire/rescue agencies. This volume explains how to handle more complex and large-scale rescue operations that challenge responders to apply solid rescue principals for longer periods of time, with the assistance required of additional resources and under more strict command and control because of the scope of the incident, its newsworthiness, crowds of people arriving on the scene, and getting the immediate attention of local or regional elected officials.




899133 Technical Rescue Ops II 69.00

High Angle Rescue Techniques

3rd Edition


A textbook style publication that is designed to teach rope rescue techniques in a systematic manner. Step-by-step approach, full color text makes it easy to learn. Includes planning for an incident, managing a team, troubleshooting problems, operating equipment, and much more. Primarily written from a search and rescue point of view. 407 pages. Hundreds of Photos and illustrations. Includes handy Field Guide. Dimensions: 8.5 x 11".



899107 H.A.R.T. 53.95
899107G H.A.R.T. Field Guide 17.95

On Rope - 2nd Ed.

Excellent reference for those interested in single rope techniques. Written from a recreational point of view, it is nonetheless comprehensive and very informative. Contains large glossary of rope work terms and describes rappelling, ascending, and other techniques. Dimensions: 8.5 x 11".



899108 On Rope 32.00



Confined Space Rescue

by Chase Sargent

Bridges the gap between theory and practice. A comprehensive guide to hazardous atmospheres, detection equipment, breathing apparatus, ventilation, retrieval systems, backup teams, and operational procedures. Covers: Forming a Team, Planning, Training, Equipment, Command, Response, Entry & Rescue, and much more... 244 pages.



899112 Confined Space Rescue 39.00

Confined Space Rescue

by Browne / Crist

A complete text that focuses on confined space operations from hazard recognition to rescue operations. Explains hazards of confined spaces and integrating ICS into the rescue operation. Nine step process with checklists simplifies the toughest rescue operations. Case studies and real life examples. 204 pages.

899131 Confined Space Rescue 71.95
899131G Instructor's Guide 47.95**Confined Space and Structural Rope Rescue**

The complete guide for technical rescue from man-made confined spaces and industrial environments. Covers all aspects of rescue operations. Topics include team development, rigging and hauling techniques, and hazard reduction and compliance issues. 384 pages, 200 illustrations. Dimensions: 8.5 x 11".



899118 Confined Space & Structural Rope Rescue 50.95


Technical Rescue Field Operations Guide

by Tom Pendley

Contains over 150 high quality graphic illustrations, command checklists, and easy to follow, step-by-step procedures for rope rescue, confined space rescue, swiftwater rescue, trench rescue, structural collapse rescue, and helicopter rescue. Dimensions: 4" x 6.5".



899120 Technical Rescue Op's Guide 19.95

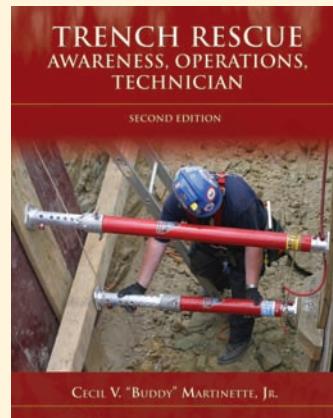**Trench Rescue: Awareness, Operations, Technician, Second Edition**

The most comprehensive textbook ever published on rescue operations in trench emergencies. Author C.V. "Buddy" Martinette covers everything from basic concepts of risk benefit to practical procedures for technician-level trench protective systems. The Second Edition includes current information on trench tools and equipment, PPE, rescue system preparation, types of collapse, hazard control, and more. The text includes up-to-date coverage of Trench Rescue Sections of NFPA 1670, NFPA 1006, and OSHA CFR § 1926 Subpart P, Excavations. The Second Edition now helps students make more effective use of class time by providing printed PowerPoint slides directly within the text.

899140 Trench Rescue, 2nd ed. 52.95
899141 Operational Field Guide 20.95**Trench Rescue DVD**

The Trench Rescue DVD contains real-life footage demonstrating the practical procedures discussed in the Trench Rescue text. The DVD, which covers both Operations and Technician level skills, shows students how to successfully perform each skill and offers helpful information, tips, and pointers.

899145 313.95

Trench Rescue

A must read for those in trench rescue situations, this vital new resource demonstrates a systematic approach to safely and successfully carrying out a trench rescue operation. 258 pages. Over 300 step-by-step photos. Dimensions: 8.5 x 11".




899119 Trench Rescue 50.95

WARNING

Technical rescue and safety is potentially hazardous. Any person using equipment sold by RESCUE TECHNOLOGY in any manner is personally responsible for learning the proper techniques involved, and assumes all risks and accepts full and complete responsibility for any and all damages or injury of any kind, including death, which may result from the use of any RESCUE TECHNOLOGY equipment.

Technical Rescue Riggers Guide


Contains dozens of illustrations and photographs to use as a quick reference for modern rope rescue techniques. This handy guide displays pulley systems, tandem prusik belays, knots, bends, hitches, litter packaging, and much more. Note: This is not an instructional text, but rather a quick reference guide for trained personnel. Dimensions: 4" x 6".



899123 Technical Riggers Guide 16.00

The Morrow Guide To Knots

A MUST book for those interested in tying or teaching knots. Excellent directions for tying nearly all useful knots. Sections on cordage, utility knots, hitches, tackle, and decorative knots. 259 pages, over 600 photographs. Dimensions: 7.5 x 5".



899105 Morrow Guide To Knots 15.95

